


# Enhance your power with these current transformers

## Technical Data

Fluke Power Quality Current Transformers are specially designed to work seamlessly with Fluke Power Quality / RPM Full Disclosure™ Power Monitors. All Clamp-on and Flexi-CT's are matched to take full advantage of your instrument's ability to set scale factors for accurate readings.

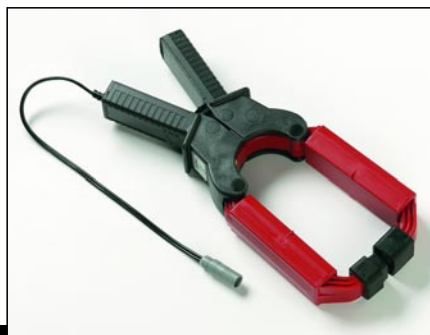

### Clamp-on Current Transformers

| Model No. | CT Type  | Current Range | Accuracy              | Frequency Response | Jaw Opening            |
|-----------|----------|---------------|-----------------------|--------------------|------------------------|
| 300SR     | Clamp-On | 0.01-5A       | 1 % RDG +/- 0.5 % FS  | 5 kHz              | .78" dia. (2 cm)       |
| 3014      | Clamp-On | 0.1-40A       | 1 % RDG +/- 0.1 % FS  | 5 kHz              | .78" dia. (2 cm)       |
| 3120R     | Clamp-On | 0.5-200A      | 1 % RDG +/- 0.3 % FS  | 5 kHz              | .78" dia. (2 cm)       |
| 3100R     | Clamp-On | 1-1000A       | 1 % RDG +/- 0.05 % FS | 5 kHz              | 2" dia. (5 cm)         |
| 3300      | Clamp-On | 10-3000A      | 2 % RDG +/- 0.05 % FS | 5 kHz              | 3.5 x 4.5" (9 x 11 cm) |



### Flexi-CT™ Flexible Current Transformers

| Model No. | CT Type  | Current Range | Accuracy              | Frequency Response | Jaw Opening         |
|-----------|----------|---------------|-----------------------|--------------------|---------------------|
| 3110/RPM  | Flexi-CT | 2-100A        | 1 % RDG +/- 0.5 % FS  | 7 kHz              | 24" length (0.6 cm) |
| 3112/RPM  | Flexi-CT | 2-100A        | 1 % RDG +/- 0.5 % FS  | 7 kHz              | 48" length (1.2 cm) |
| 3210/RPM  | Flexi-CT | 20-1000A      | 1 % RDG +/- 0.15 % FS | 7 kHz              | 24" length (0.6 cm) |
| 3212/RPM  | Flexi-CT | 20-1000A      | 1 % RDG +/- 0.15 % FS | 7 kHz              | 48" length (1.2 cm) |
| 3310/RPM  | Flexi-CT | 100-5000A     | 1 % RDG +/- 0.15 % FS | 7 kHz              | 24" length (0.6 cm) |
| 3312/RPM  | Flexi-CT | 100-5000A     | 1 % RDG +/- 0.15 % FS | 7 kHz              | 48" length (1.2 cm) |



### Split-Core Current Transformers

| Model No. | CT Type       | Current Range | Accuracy             | Frequency Response | Jaw Opening  |
|-----------|---------------|---------------|----------------------|--------------------|--------------|
| 3583R     | Split-Core CT | 0.01 - 10A    | 1 % RDG +/- 0.5 % FS | 5 kHz              | 7/16" (1 cm) |
| 3584R     | Split-Core CT | 0.1 - 40A     | 1 % RDG +/- 0.5 % FS | 5 kHz              | 7/16" (1 cm) |
| 3585R     | Split-Core CT | 0.5 - 100A    | 1 % RDG +/- 0.5 % FS | 5 kHz              | 7/16" (1 cm) |

### Interface and Extension Cables

|          |             |                                                       |                 |
|----------|-------------|-------------------------------------------------------|-----------------|
| 3570/RPM | CT Cable    | Connects clamp on style CT to Power Recorder          | 10 feet (2.5 m) |
| 3533/RPM | Pod Adapter | Connects Flexible CT to Hostile Enclosure Current Pod |                 |

**Fluke.** *Keeping your world up and running.*

#### Fluke Corporation

PO Box 9090, Everett, WA USA 98206

Fluke Europe B.V.  
PO Box 1186, 5602 BD  
Eindhoven, The Netherlands

For more information call:

In the U.S.A. (800) 443-5853 or

Fax (425) 446-5116

In Europe/M-East/Africa (31 40) 2 675 200 or

Fax (31 40) 2 675 222

In Canada (800) 36-FLUKE or

Fax (905) 890-6866

From other countries (425) 446-5500 or

Fax (425) 446-5116

Web access: <http://www.fluke.com>

©2003 Fluke Corporation. All rights reserved.  
Printed in U.S.A. 7/2003 2101798 D-ENG-N Rev A