

# R&S®FSW

## Signal and Spectrum Analyzer

### Specifications

New order number:  
1331.5003.xx



3 year warranty

# CONTENTS

|   |           |
|---|-----------|
| <b>Definitions .....</b>  | <b>3</b>  |
| <b>Specifications.....</b>  | <b>4</b>  |
| Frequency .....   | 4         |
| Sweep time.....   | 5         |
| Resolution bandwidths.....  | 6         |
| Level.....  | 7         |
| Sensitivity .....   | 9         |
| Spurious responses .....  | 20        |
| Level measurement uncertainty .....   | 21        |
| Adjacent channel power dynamic range .....  | 22        |
| Trigger functions.....  | 23        |
| Audio demodulator .....   | 23        |
| I/Q data .....  | 24        |
| Inputs and outputs .....  | 30        |
| General data.....   | 33        |
| <b>Options .....</b>  | <b>35</b> |
| R&S®FSW-B10 external generator control .....  | 35        |
| R&S®FSW-B13 highpass filters .....  | 35        |
| R&S®FSW-B17 digital baseband interface .....  | 35        |
| R&S®FSW-B517 DIG IQ 40G streaming out interface.....  | 36        |
| R&S®FSW-B21 LO/IF connections for external mixers (not available for R&S®FSW8, R&S®FSW13) .....             | 36        |
| R&S®FSW-B24 RF preamplifier.....  | 37        |
| R&S®FSW-B25 electronic attenuator .....   | 37        |
| R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs ..... | 38        |
| R&S®FSW-B2000 2 GHz analysis bandwidth (option available for all models except R&S®FSW8, R&S®FSW13) .....   | 40        |
| R&S®FSW-B5000 5 GHz analysis bandwidth for R&S®FSW43 and R&S®FSW85 .....                                    | 42        |
| R&S®FSW-B2071 oscilloscope baseband inputs (available for all R&S®FSW models).....                          | 44        |
| <b>Ordering information .....</b>   | <b>45</b> |
| Options for R&S®FSW with order no. 1331.5003.xx.....  | 45        |
| <i>Firmware</i> .....   | 47        |
| <i>PC software</i> .....  | 49        |
| Upgrades.....   | 50        |
| Recommended extras.....   | 51        |
| Power sensors supported .....   | 53        |
| Probes supported by R&S®FSW-B71/-B71E option .....  | 54        |
| Oscilloscopes supported by R&S®FSW-B2000/-B2071 option .....  | 54        |
| Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option .....                              | 54        |
| Service options.....  | 55        |

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

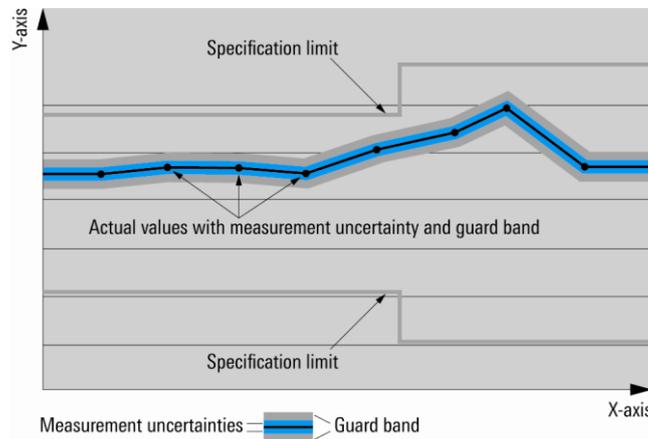

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

# Specifications

## Frequency


|   |                        |                    |
|---|------------------------|--------------------|
| <b>Frequency range</b>                          | R&S®FSW8               |                    |
|   | DC coupled             | 2 Hz to 8 GHz      |
|   | AC coupled             | 10 MHz to 8 GHz    |
|   | R&S®FSW13              |                    |
|   | DC coupled             | 2 Hz to 13.6 GHz   |
|   | AC coupled             | 10 MHz to 13.6 GHz |
|   | R&S®FSW26              |                    |
|   | DC coupled             | 2 Hz to 26.5 GHz   |
|   | AC coupled             | 10 MHz to 26.5 GHz |
|   | R&S®FSW43              |                    |
|   | DC coupled             | 2 Hz to 43.5 GHz   |
|   | AC coupled             | 10 MHz to 43.5 GHz |
|   | R&S®FSW50              |                    |
|   | DC coupled             | 2 Hz to 50 GHz     |
|   | AC coupled             | 10 MHz to 50 GHz   |
|   | R&S®FSW67              |                    |
|   | DC coupled             | 2 Hz to 67 GHz     |
|   | AC coupled             | 10 MHz to 67 GHz   |
|   | R&S®FSW85 <sup>1</sup> |                    |
|   | RF1 input              |                    |
|   | standard               |                    |
|   | DC coupled             | 2 Hz to 85 GHz     |
|   | AC coupled             | 10 MHz to 85 GHz   |
| with R&S®FSW-B90G option, YIG preselector = off |                        |                    |
| DC coupled                                      | 2 Hz to 90 GHz         |                    |
| AC coupled                                      | 10 MHz to 90 GHz       |                    |
| RF2 input                                       |                        |                    |
| DC coupled                                      | 2 Hz to 67 GHz         |                    |
| AC coupled                                      | 10 MHz to 67 GHz       |                    |
| <b>Frequency resolution</b>                     | 0.01 Hz                |                    |

|   |   |  |
|---|---|--|
| <b>Reference frequency, internal</b>    |   |  |
| Accuracy                                |   | $\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$ |
| Aging per year                          | standard  | $\pm 1 \times 10^{-7}$   |
|   | with R&S®FSW-B4 OCXO precision frequency reference option | $\pm 3 \times 10^{-8}$   |
| Temperature drift (0 °C to +50 °C)      | standard  | $\pm 1 \times 10^{-7}$   |
|   | with R&S®FSW-B4 OCXO precision frequency reference option | $\pm 1 \times 10^{-9}$   |
| Achievable initial calibration accuracy | standard  | $\pm 1 \times 10^{-8}$   |
|   | with R&S®FSW-B4 OCXO precision frequency reference option | $\pm 5 \times 10^{-9}$   |

|                                   |                                 |   |
|-----------------------------------|---------------------------------|---|
| <b>Frequency readout</b>          |                                 |   |
| Marker resolution                 |                                 | 1 Hz  |
| Uncertainty                       |                                 | $\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2} (\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$ |
| Number of sweep (trace) points    | default value                   | 1001  |
|                                   | range                           | 101 to 100001   |
| Marker tuning frequency step size | marker step size = sweep points | $\text{span}/(\text{sweep points} - 1)$   |
|                                   | marker step size = standard     | $\text{span}/(\text{default sweep points} - 1)$   |
| Frequency counter resolution      |                                 | 0.001 Hz  |
| Count accuracy                    |                                 | $\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} (\text{last digit}))$  |
| Display range for frequency axis  |                                 | 0 Hz, 10 Hz to max. frequency   |
| Resolution                        |                                 | 0.1 Hz  |
| Max. span deviation               |                                 | $\pm 0.1 \%$  |

<sup>1</sup> For R&S®FSW85 all subsequent specifications apply to both RF1 input and RF2 input, unless otherwise stated.

| <b>Spectral purity</b> |  |  |
|------------------------|--|--|
| SSB phase noise        | frequency = 1000 MHz, carrier offset                   |  |
|                        | 10 Hz, without R&S®FSW-B4 option                       | -80 dBc (1 Hz), typ. -90 dBc(1Hz)        |
|                        | 10 Hz, with R&S®FSW-B4 option                          | -95 dBc (1 Hz), typ -100 dBc(1Hz)        |
|                        | 100 Hz   | -109 dBc (1 Hz), typ. -116 dBc (1 Hz)    |
|                        | 1 kHz  | < -127 dBc (1 Hz), typ. -132 dBc (1 Hz)  |
|                        | 10 kHz   | < -136 dBc (1 Hz), typ. -140 dBc (1 Hz)  |
|                        | 100 kHz  | < -139 dBc (1 Hz), typ. -143 dBc (1 Hz)  |
|                        | 1 MHz  | < -145 dBc (1 Hz), typ. -149 dBc (1 Hz), |
|                        | 10 MHz   | -156 dBc (1 Hz) (nom.)                   |
| Residual FM            | frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms | < 0.1 Hz (nom.)                          |

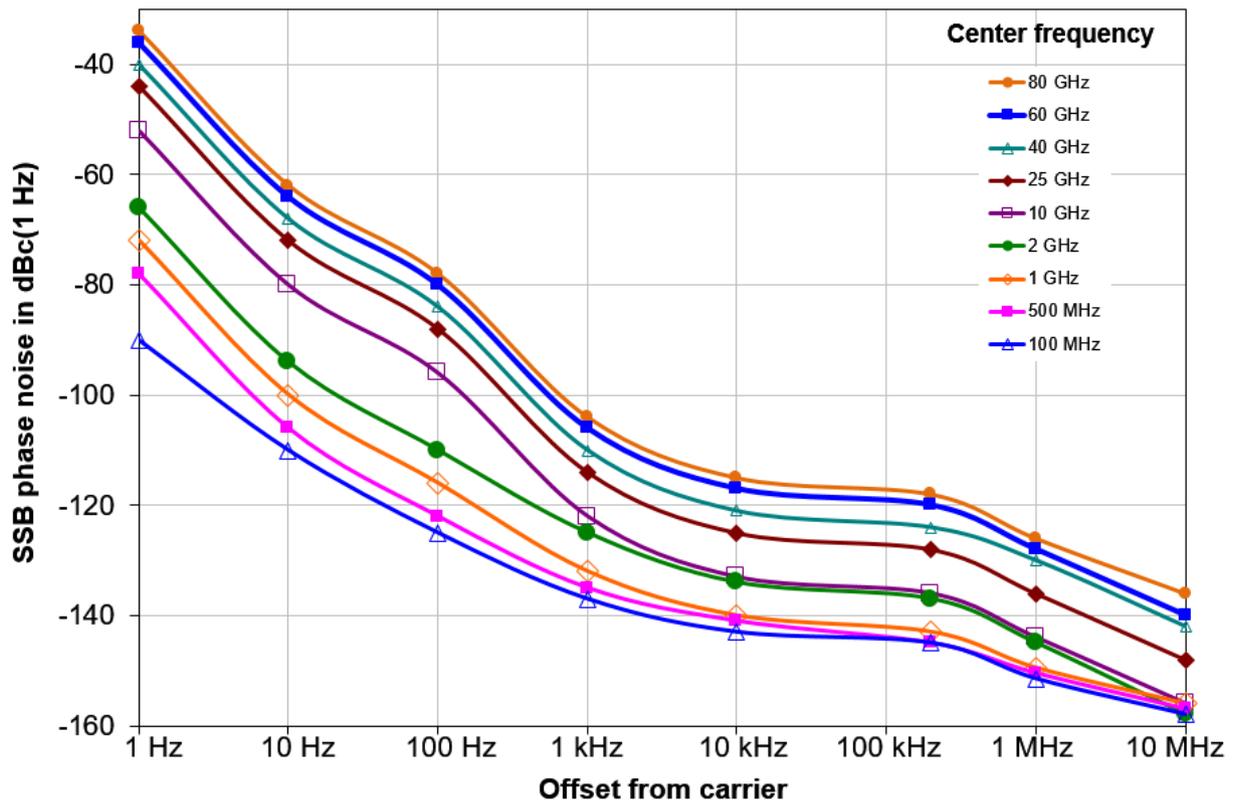

Typical phase noise at different center frequencies (with the R&S®FSW-B4 option for offsets  $\leq 10$  Hz).

## Sweep time

|                     |                   |                                   |
|---------------------|-------------------|-----------------------------------|
| Sweep time range    | span = 0 Hz       | 1 $\mu$ s to 16000 s              |
|                     | span $\geq 10$ Hz | 3 $\mu$ s to 16000 s <sup>2</sup> |
| Sweep time accuracy | span = 0 Hz       | $\pm 0.1$ % (nom.)                |
|                     | span $\geq 10$ Hz | $\pm 3$ % (nom.)                  |

<sup>2</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

## Resolution bandwidths

| <b>Sweep filters and FFT filters</b> |                        |  |
|--------------------------------------|------------------------|--|
| Resolution bandwidths (–3 dB)        |                        | 1 Hz to 10 MHz in 1/2/3/5 sequence, 3.9 kHz, 6.25 kHz additionally |
|                                      | with R&S®FSW-B8 option | 20 MHz, 50 MHz, 80 MHz additionally                                |
| Bandwidth uncertainty                |                        | < 3 % (nom.)   |
| Shape factor 60 dB:3 dB              |                        | < 5 (nom.)   |

| <b>Channel filters</b>  |  |   |
|-------------------------|--|---|
| Bandwidths (–3 dB)      | standard<br>(RRC = root raised cosine) | 100 Hz, 200 Hz, 300 Hz, 500 Hz<br>1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/<br>12.5/14/15/16/18 (RRC)/20/21/<br>24.3 (RRC)/25/30/50/100/150/192/200/<br>300/500 kHz |
|                         | with R&S®FSW-B8 option                 | 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/<br>4.096 (RRC)/5/10 MHz  |
|                         | with R&S®FSW-B8 option                 | 20 MHz, 28 MHz, 40 MHz, 80 MHz<br>additionally  |
| Bandwidth accuracy      |  | < 2 % (nom.)  |
| Shape factor 60 dB:3 dB |  | < 2 (nom.)  |

| <b>EMI filters (with R&amp;S®FSW-K54 only)</b> |  |   |
|--|--|---|
| Bandwidths (–6 dB)                             |  | 10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz,<br>10 kHz, 100 kHz, 120 kHz, 1 MHz |
| Bandwidth uncertainty                          |  | < 3 % (nom.)  |
| Shape factor 60 dB:3 dB                        |  | < 6 (nom.)  |

|                         |                        |                                     |
|-------------------------|------------------------|-------------------------------------|
| <b>Video bandwidths</b> | standard               | 1 Hz to 10 MHz in 1/2/3/5 sequence  |
|                         | with R&S®FSW-B8 option | 20 MHz, 50 MHz, 80 MHz additionally |

|                                       |                                  |                              |
|---------------------------------------|----------------------------------|------------------------------|
| <b>Max. signal analysis bandwidth</b> | equalized                        |                              |
|                                       | standard                         | 10 MHz (nom.) <sup>3</sup>   |
|                                       | with R&S®FSW-B28 option          | 28 MHz (nom.) <sup>3</sup>   |
|                                       | with R&S®FSW-B40 option          | 40 MHz (nom.) <sup>3</sup>   |
|                                       | with R&S®FSW-B80 option          | 80 MHz (nom.) <sup>3</sup>   |
|                                       | with R&S®FSW-B160 option         | 160 MHz (nom.) <sup>3</sup>  |
|                                       | with R&S®FSW-B320 option         | 320 MHz (nom.) <sup>3</sup>  |
|                                       | with R&S®FSW-B512/-B512R option  | 512 MHz (nom.) <sup>3</sup>  |
|                                       | with R&S®FSW-B1200 option        | 1200 MHz (nom.) <sup>4</sup> |
|                                       | with R&S®FSW-B2001/-B800R option | 2000 MHz (nom.) <sup>4</sup> |
| with R&S®FSW-B5000 option             | 5 GHz (nom.) <sup>5</sup>        |                              |

<sup>3</sup> YIG preselector off for  $f \geq 8$  GHz.

<sup>4</sup> YIG preselector off for  $f \geq 12$  GHz.

<sup>5</sup> The R&S®FSW-B5000 option can be combined with the base unit or any other analysis bandwidth option.  
For detailed specifications, see section "R&S®FSW-B5000 5 GHz analysis bandwidth".

## Level

| <b>Level display</b>             |                           |  |
|----------------------------------|---------------------------|--|
| Display range                    |                           | displayed noise floor up to +30 dBm  |
| Logarithmic level axis           |                           | 1 dB to 200 dB, in steps of 1/2/5  |
| Linear level axis                |                           | 10 % of reference level per level division, 10 divisions or logarithmic scaling    |
| Number of traces                 |                           | 6  |
| Trace detector                   |                           | max. peak, min. peak, auto peak (normal), sample, RMS, average                     |
|                                  | with R&S®FSW-K54          | quasi-peak, RMS average, CISPR average additionally                                |
| Trace functions                  |                           | clear/write, max. hold, min. hold, average, view                                   |
| Setting range of reference level |                           | -130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB |
| Units of level axis              | logarithmic level display | dBm, dBμV, dBmV, dBμA, dBpW  |
|                                  | linear level display      | μV, mV, μA, mA, pW, nW   |

| <b>Max. input level</b>                                   |  |                  |
|---|--|------------------|
| DC voltage  | AC coupled   |                  |
|   | R&S®FSW8 to R&S®FSW67  | 50 V             |
|   | R&S®FSW85  | 25 V             |
|   | DC coupled   | 0 V              |
| CW RF power   | RF attenuation = 0 dB  | 20 dBm (= 0.1 W) |
|   | RF attenuation ≥ 10 dB   |                  |
|   | without R&S®FSW-B25 option or with R&S®FSW-B25 option installed and mechanical attenuation ≥ 10 dB | 30 dBm (= 1 W)   |
| Pulse spectral density                                    | RF attenuation = 0 dB, RF preamplifier off   | 97 dB μV/MHz     |
| Max. pulse voltage  | without R&S®FSW-B25 option or electronic attenuation off   |                  |
|   | RF attenuation ≥ 10 dB   | 150 V            |
|   | with R&S®FSW-B25 option installed, electronic attenuation on                                       |                  |
|   | mechanical attenuation = 0 dB  | 25 V             |
|   | mechanical attenuation ≥ 10 dB   | 75 V             |
| Max. pulse energy, pulse duration $\tau = 10 \mu\text{s}$ | without R&S®FSW-B25 option or electronic attenuation off   |                  |
|   | RF attenuation ≥ 10 dB   | 1 mWs            |
|   | with R&S®FSW-B25 option installed, electronic attenuation on                                       |                  |
|   | mechanical attenuation ≥ 10 dB   | 1 mWs            |

| <b>Intermodulation</b>                     |  |                |
|--|--|----------------|
| 1 dB compression of input mixer (two-tone) | RF attenuation = 0 dB, RF preamplifier off                         |                |
|  | $f_{in} \leq 3 \text{ GHz}$  | +15 dBm (nom.) |
|  | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$                        | +10 dBm (nom.) |
|  | $f_{in} > 8 \text{ GHz}$   | +7 dBm (nom.)  |
|  | with R&S®FSW-B24 option, RF attenuation = 0 dB, RF preamplifier on |                |
|  | $f_{in} \leq 3 \text{ GHz}$  | -13 dBm (nom.) |
|  | $3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$                        | -20 dBm (nom.) |
|  | $f_{in} > 8 \text{ GHz}$   | -23 dBm (nom.) |

|                                       |  |                                    |
|---------------------------------------|--|------------------------------------|
| Third-order intercept point (TOI)     | R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, RF attenuation = 0 dB, level 2 x -15 dBm, $\Delta f > 5 \times \text{RBW}$ , RF preamplifier off            |                                    |
|                                       | $f_{in} < 10 \text{ MHz}$  | 28 dBm (nom.)                      |
|                                       | $10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$   | > 25 dBm, typ. 30 dBm              |
|                                       | $1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$  | > 20 dBm, typ. 25 dBm <sup>6</sup> |
|                                       | $3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$  | > 17 dBm, typ. 20 dBm              |
|                                       | R&S®FSW85, RF attenuation = 0 dB, level 2 x -15 dBm, $\Delta f > 5 \times \text{RBW}$ , RF preamplifier off  |                                    |
|                                       | $f_{in} < 100 \text{ MHz}$   | 22 dBm (nom.)                      |
|                                       | $100 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$  | > 22 dBm, typ. 30 dBm              |
|                                       | $1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$  | > 20 dBm, typ. 25 dBm <sup>6</sup> |
|                                       | $3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$  | > 17 dBm, typ. 20 dBm              |
|                                       | R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level 2 x -15 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off                                   |                                    |
|                                       | $8 \text{ GHz} \leq f_{in} < 10 \text{ GHz}$   | > 14 dBm, typ. 17 dBm              |
|                                       | $10 \text{ GHz} \leq f_{in} < 12 \text{ GHz}$  | > 16 dBm, typ. 20 dBm              |
|                                       | $12 \text{ GHz} \leq f_{in} < 17 \text{ GHz}$  | > 18 dBm, typ. 23 dBm              |
|                                       | $17 \text{ GHz} \leq f_{in} < 19 \text{ GHz}$  | > 16 dBm, typ. 20 dBm              |
|                                       | $19 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$   | > 18 dBm, typ. 23 dBm              |
|                                       | R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85, RF attenuation = 0 dB, level 2 x -20 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier off             |                                    |
|                                       | $8 \text{ GHz} \leq f_{in} \leq 13.6 \text{ GHz}$  | > 8 dBm, typ. 11 dBm               |
|                                       | $13.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$   | > 10 dBm, typ. 15 dBm              |
|                                       | $f_{in} > 40 \text{ GHz}$  | 12 dBm (nom.)                      |
|                                       | R&S®FSW8, R&S®FSW13, R&S®FSW26 with R&S®FSW-B24 option, RF attenuation = 0 dB, level 2 x -50 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier on  |                                    |
|                                       | $10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$   | -10 dBm (nom.)                     |
|                                       | $1 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$  | -13 dBm (nom.)                     |
|                                       | $8 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$  | -15 dBm (nom.)                     |
|                                       | R&S®FSW43, R&S®FSW50, R&S®FSW67 with R&S®FSW-B24 option, RF attenuation = 0 dB, level 2 x -55 dBm, $\Delta f > 5 \times \text{RBW}$ , YIG preselector on, RF preamplifier on |                                    |
|                                       | $10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$   | -5 dBm (nom.)                      |
|                                       | $1 \text{ GHz} \leq f_{in} < 4 \text{ GHz}$  | -10 dBm (nom.)                     |
| $f_{in} > 4 \text{ GHz}$              | -20 dBm (nom.)   |                                    |
| Second-harmonic intercept point (SHI) | R&S®FSW8, R&S®FSW13, R&S®FSW26, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off   |                                    |
|                                       | $1 \text{ MHz} < f_{in} \leq 350 \text{ MHz}$  | > 50 dBm, typ. 62 dBm              |
|                                       | $350 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$  | > 70 dBm, typ. 80 dBm              |
|                                       | $500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>7</sup>  | > 47 dBm, typ. 52 dBm              |
|                                       | $500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>8</sup>  | > 62 dBm, typ. 70 dBm              |
|                                       | $1.5 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$   | > 62 dBm, typ. 70 dBm              |
|                                       | $4 \text{ GHz} < f_{in} \leq 13.5 \text{ GHz}$   | 65 dBm (nom.)                      |
|                                       | R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85, RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off   |                                    |
|                                       | $1 \text{ MHz} < f_{in} \leq 500 \text{ MHz}$  | > 45 dBm, typ. 55 dBm <sup>9</sup> |
|                                       | $500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>7</sup>  | > 47 dBm, typ. 56 dBm              |
|                                       | $500 \text{ MHz} < f_{in} < 1.5 \text{ GHz}$ <sup>8</sup>  | > 52 dBm, typ. 60 dBm              |
|                                       | $1.5 \text{ GHz} \leq f_{in} \leq 4 \text{ GHz}$   | > 62 dBm, typ. 70 dBm              |
|                                       | $4 \text{ GHz} < f_{in} \leq 42.5 \text{ GHz}$   | 65 dBm (nom.)                      |
|                                       | R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, with R&S®FSW-B24 option, RF attenuation = 0 dB, level = -50 dBm, YIG preselector on, RF preamplifier on     |                                    |
|                                       | $50 \text{ MHz} < f_{in} \leq 21.75 \text{ GHz}$   | 10 dBm (nom.)                      |

<sup>6</sup> With R&S®FSW-B13 highpass filter option, highpass off. With highpass on, the TOI degrades by 5 dB (nom.).

<sup>7</sup> Without R&S®FSW-B13 highpass filter option or highpass off.

<sup>8</sup> With R&S®FSW-B13 highpass filter option, highpass on.

<sup>9</sup> For  $1 \text{ MHz} < f_{in} \leq 100 \text{ MHz}$  the following limit applies for R&S®FSW85: > 42 dBm, typ. 47 dBm

## Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

| <b>Displayed average noise level of the R&amp;S®FSW8</b>            |  |                         |
|---|--|-------------------------|
| RF preamplifier off   | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C   |                         |
|   | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |
|   | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |
|   | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, without R&S®FSW-B25 electronic attenuator option                          |                         |
|   | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |
|   | 1 MHz < f ≤ 1 GHz  | -150 dBm, typ. -154 dBm |
|   | 1 GHz < f < 3 GHz <sup>7</sup>   | -152 dBm, typ. -156 dBm |
|   | 1 GHz < f < 3 GHz <sup>8</sup>   | -155 dBm, typ. -160 dBm |
|   | 3 GHz ≤ f ≤ 8 GHz  | -152 dBm, typ. -156 dBm |
| add 1 dB to the above values if the R&S®FSW-B25 option is installed |  |                         |
| RF preamplifier = 30 dB   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, with R&S®FSW-B24 option, without R&S®FSW-B25 electronic attenuator option |                         |
|   | 10 MHz < f ≤ 50 MHz  | -154 dBm (nom.)         |
|   | 50 MHz < f ≤ 150 MHz   | -163 dBm, typ. -166 dBm |
|   | 150 MHz < f ≤ 8 GHz  | -166 dBm, typ. -169 dBm |
|   | add 1 dB to the above values if the R&S®FSW-B25 option is installed  |                         |
| Improvement with noise cancellation                                 | for noise-like signals   | 13 dB (nom.)            |

| <b>Displayed average noise level of the R&amp;S®FSW13, R&amp;S®FSW26, without R&amp;S®FSW-B24 option</b> |  |                         |
|--|--|-------------------------|
|  | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C   |                         |
|  | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |
|  | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |
|  | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |
|  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option |                         |
|  | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |
|  | 1 MHz < f ≤ 1 GHz  | -149 dBm, typ. -154 dBm |
|  | 1 GHz < f < 3 GHz <sup>7</sup>   | -151 dBm, typ. -156 dBm |
|  | 1 GHz < f < 3 GHz <sup>8</sup>   | -154 dBm, typ. -159 dBm |
|  | 3 GHz ≤ f < 8 GHz  | -151 dBm, typ. -156 dBm |
|  | 8 GHz ≤ f < 13.6 GHz   | -150 dBm, typ. -155 dBm |
|  | 13.6 GHz ≤ f < 18 GHz  | -149 dBm, typ. -153 dBm |
|  | 18 GHz ≤ f < 25 GHz  | -147 dBm, typ. -150 dBm |
|  | 25 GHz ≤ f < 26.5 GHz  | -143 dBm, typ. -146 dBm |
|  | add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed   |                         |
|  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option           |                         |
|  | 8 GHz ≤ f < 13.6 GHz   | -150 dBm, typ. -155 dBm |
|  | 13.6 GHz ≤ f < 25 GHz  | -149 dBm, typ. -153 dBm |
|  | 25 GHz ≤ f < 26.5 GHz  | -147 dBm, typ. -150 dBm |
|  | add 2 dB to the above values if the R&S®FSW-B25 option is installed  |                         |
| Improvement with noise cancellation  | for noise-like signals   | 13 dB (nom.)            |

| Displayed average noise level of the R&S®FSW13, R&S®FSW26, with R&S®FSW-B24 option |  |                         |              |
|--|--|-------------------------|--------------|
| RF preamplifier off  | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C   |                         |              |
|  | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |              |
|  | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |              |
|  | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |              |
|  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on, without R&S®FSW-B25 electronic attenuator option |                         |              |
|  | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |              |
|  | 1 MHz < f ≤ 1 GHz  | -149 dBm, typ. -154 dBm |              |
|  | 1 GHz < f < 3 GHz <sup>7</sup>   | -151 dBm, typ. -156 dBm |              |
|  | 1 GHz < f < 3 GHz <sup>8</sup>   | -154 dBm, typ. -159 dBm |              |
|  | 3 GHz ≤ f < 8 GHz  | -151 dBm, typ. -156 dBm |              |
|  | 8 GHz ≤ f < 13.6 GHz   | -149 dBm, typ. -154 dBm |              |
|  | 13.6 GHz ≤ f < 18 GHz  | -148 dBm, typ. -152 dBm |              |
|  | 18 GHz ≤ f < 25 GHz  | -145 dBm, typ. -149 dBm |              |
|  | 25 GHz ≤ f < 26.5 GHz  | -141 dBm, typ. -145 dBm |              |
|  | add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed   |                         |              |
| RF preamplifier = 30 dB  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, without R&S®FSW-B25 electronic attenuator option           |                         |              |
|  | 8 GHz ≤ f < 13.6 GHz   | -149 dBm, typ. -154 dBm |              |
|  | 13.6 GHz ≤ f < 25 GHz  | -148 dBm, typ. -152 dBm |              |
|  | 25 GHz ≤ f < 26.5 GHz  | -145 dBm, typ. -149 dBm |              |
|  | add 2 dB to the above values if the R&S®FSW-B25 option is installed  |                         |              |
|  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on, without R&S®FSW-B25 electronic attenuator option            |                         |              |
|  | 10 MHz < f ≤ 50 MHz  | -154 dBm (nom.)         |              |
|  | 50 MHz < f ≤ 150 MHz   | -163 dBm, typ. -166 dBm |              |
|  | 150 MHz < f ≤ 8 GHz  | -166 dBm, typ. -169 dBm |              |
|  | 8 GHz < f ≤ 13.6 GHz   | -164 dBm, typ. -168 dBm |              |
|  | 13.6 GHz < f ≤ 22 GHz  | -162 dBm, typ. -166 dBm |              |
|  | 22 GHz < f ≤ 26.5 GHz  | -157 dBm, typ. -161 dBm |              |
|  | add 1 dB to the above values for frequencies < 8 GHz, 2 dB for frequencies ≥ 8 GHz, if R&S®FSW-B25 option is installed   |                         |              |
|  | Improvement with noise cancellation  | for noise-like signals  | 13 dB (nom.) |

| Displayed average noise level of the R&S®FSW43 without R&S®FSW-B24 option |  |                         |
|---|--|-------------------------|
|   | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C                   |                         |
|   | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |
|   | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |
|   | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on |                         |
|   | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |
|   | 1 MHz < f ≤ 1 GHz  | -149 dBm, typ. -154 dBm |
|   | 1 GHz < f < 3 GHz <sup>7</sup>   | -151 dBm, typ. -156 dBm |
|   | 1 GHz < f < 3 GHz <sup>8</sup>   | -154 dBm, typ. -159 dBm |
|   | 3 GHz ≤ f < 8 GHz  | -151 dBm, typ. -156 dBm |
|   | 8 GHz ≤ f < 13.6 GHz   | -150 dBm, typ. -154 dBm |
|   | 13.6 GHz ≤ f < 18 GHz  | -149 dBm, typ. -153 dBm |
|   | 18 GHz ≤ f < 25 GHz  | -147 dBm, typ. -151 dBm |
|   | 25 GHz ≤ f ≤ 34 GHz  | -143 dBm, typ. -147 dBm |
|   | 34 GHz < f ≤ 40 GHz  | -140 dBm, typ. -144 dBm |
|   | 40 GHz < f ≤ 43.5 GHz  | -138 dBm, typ. -142 dBm |
|   | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |                         |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off           |                         |
|   | 8 GHz ≤ f < 13.6 GHz   | -152 dBm, typ. -157 dBm |
|   | 13.6 GHz ≤ f < 18 GHz  | -151 dBm, typ. -156 dBm |
|   | 18 GHz ≤ f < 25 GHz  | -149 dBm, typ. -154 dBm |
|   | 25 GHz ≤ f ≤ 34 GHz  | -147 dBm, typ. -151 dBm |
|   | 34 GHz < f ≤ 40 GHz  | -144 dBm, typ. -148 dBm |
|   | 40 GHz < f ≤ 43.5 GHz  | -142 dBm, typ. -146 dBm |
| Improvement with noise cancellation                                       | for noise-like signals   | 13 dB (nom.)            |

| Displayed average noise level of the R&S®FSW43 with R&S®FSW-B24 option |  |                         |
|--|--|-------------------------|
| RF preamplifier off  | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C                   |                         |
|  | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |
|  | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |
|  | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |
|  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on |                         |
|  | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |
|  | 1 MHz < f ≤ 1 GHz  | -149 dBm, typ. -154 dBm |
|  | 1 GHz < f < 3 GHz <sup>7</sup>   | -150 dBm, typ. -155 dBm |
|  | 1 GHz < f < 3 GHz <sup>8</sup>   | -153 dBm, typ. -158 dBm |
|  | 3 GHz ≤ f < 8 GHz  | -150 dBm, typ. -155 dBm |
|  | 8 GHz ≤ f < 13.6 GHz   | -148 dBm, typ. -152 dBm |
|  | 13.6 GHz ≤ f < 18 GHz  | -147 dBm, typ. -151 dBm |
|  | 18 GHz ≤ f < 25 GHz  | -145 dBm, typ. -149 dBm |
|  | 25 GHz ≤ f ≤ 34 GHz  | -140 dBm, typ. -144 dBm |
|  | 34 GHz < f ≤ 40 GHz  | -137 dBm, typ. -141 dBm |
|  | 40 GHz < f ≤ 43.5 GHz  | -135 dBm, typ. -140 dBm |
|  | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |                         |
|  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off           |                         |
|  | 8 GHz ≤ f < 13.6 GHz   | -150 dBm, typ. -155 dBm |
|  | 13.6 GHz ≤ f < 18 GHz  | -149 dBm, typ. -154 dBm |
| 18 GHz ≤ f < 25 GHz  | -147 dBm, typ. -152 dBm  |                         |
| 25 GHz ≤ f ≤ 34 GHz  | -144 dBm, typ. -149 dBm  |                         |
| 34 GHz < f ≤ 40 GHz  | -141 dBm, typ. -145 dBm  |                         |
| 40 GHz < f ≤ 43.5 GHz  | -139 dBm, typ. -144 dBm  |                         |
| RF preamplifier = 30 dB  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on            |                         |
|  | 100 kHz < f ≤ 1 MHz  | -160 dBm, typ. -163 dBm |
|  | 1 MHz < f ≤ 3 GHz  | -165 dBm, typ. -169 dBm |
|  | 3 GHz < f ≤ 8 GHz  | -162 dBm, typ. -166 dBm |
|  | 8 GHz < f ≤ 18 GHz   | -162 dBm, typ. -167 dBm |
|  | 18 GHz < f ≤ 26.5 GHz  | -161 dBm, typ. -166 dBm |
|  | 26.5 GHz < f ≤ 40 GHz  | -160 dBm, typ. -164 dBm |
|  | 40 GHz < f ≤ 43.5 GHz  | -157 dBm, typ. -162 dBm |
|  | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |                         |
|  | Improvement with noise cancellation  | for noise-like signals  |

| Displayed average noise level of the R&S®FSW50 without R&S®FSW-B24 option |  |                         |
|---|--|-------------------------|
|   | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C                   |                         |
|   | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |
|   | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |
|   | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on |                         |
|   | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |
|   | 1 MHz < f ≤ 1 GHz  | -149 dBm, typ. -154 dBm |
|   | 1 GHz < f < 3 GHz <sup>7</sup>   | -151 dBm, typ. -156 dBm |
|   | 1 GHz < f < 3 GHz <sup>8</sup>   | -154 dBm, typ. -159 dBm |
|   | 3 GHz ≤ f < 8 GHz  | -151 dBm, typ. -156 dBm |
|   | 8 GHz ≤ f < 13.6 GHz   | -150 dBm, typ. -154 dBm |
|   | 13.6 GHz ≤ f < 18 GHz  | -149 dBm, typ. -153 dBm |
|   | 18 GHz ≤ f < 25 GHz  | -147 dBm, typ. -151 dBm |
|   | 25 GHz ≤ f ≤ 34 GHz  | -143 dBm, typ. -147 dBm |
|   | 34 GHz < f ≤ 40 GHz  | -140 dBm, typ. -144 dBm |
|   | 40 GHz < f ≤ 43.5 GHz  | -138 dBm, typ. -142 dBm |
|   | 43.5 GHz < f ≤ 47 GHz  | -136 dBm, typ. -140 dBm |
|   | 47 GHz < f ≤ 49 GHz  | -134 dBm, typ. -138 dBm |
|   | 49 GHz < f ≤ 50 GHz  | -132 dBm, typ. -136 dBm |
|   | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |                         |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off           |                         |
|   | 8 GHz ≤ f < 13.6 GHz   | -152 dBm, typ. -157 dBm |
|   | 13.6 GHz ≤ f < 18 GHz  | -151 dBm, typ. -156 dBm |
|   | 18 GHz ≤ f < 25 GHz  | -149 dBm, typ. -154 dBm |
|   | 25 GHz ≤ f ≤ 34 GHz  | -147 dBm, typ. -151 dBm |
|   | 34 GHz < f ≤ 40 GHz  | -144 dBm, typ. -148 dBm |
|   | 40 GHz < f ≤ 43.5 GHz  | -142 dBm, typ. -146 dBm |
|   | 43.5 GHz < f ≤ 47 GHz  | -140 dBm, typ. -144 dBm |
|   | 47 GHz < f ≤ 49 GHz  | -138 dBm, typ. -142 dBm |
|   | 49 GHz < f ≤ 50 GHz  | -136 dBm, typ. -140 dBm |
| Improvement with noise cancellation                                       | for noise-like signals   | 13 dB (nom.)            |




| Displayed average noise level of the R&S®FSW67 without R&S®FSW-B24 option |  |                         |
|---|--|-------------------------|
|   | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C                   |                         |
|   | 2 Hz ≤ f ≤ 100 Hz  | -110 dBm, typ. -120 dBm |
|   | 100 Hz < f ≤ 1 kHz   | -120 dBm, typ. -130 dBm |
|   | 1 kHz < f < 9 kHz  | -135 dBm, typ. -147 dBm |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on |                         |
|   | 9 kHz ≤ f ≤ 1 MHz  | -145 dBm, typ. -150 dBm |
|   | 1 MHz < f ≤ 1 GHz  | -149 dBm, typ. -154 dBm |
|   | 1 GHz < f < 3 GHz <sup>7</sup>   | -151 dBm, typ. -156 dBm |
|   | 1 GHz < f < 3 GHz <sup>8</sup>   | -154 dBm, typ. -159 dBm |
|   | 3 GHz ≤ f < 8 GHz  | -151 dBm, typ. -156 dBm |
|   | 8 GHz ≤ f < 13.6 GHz   | -146 dBm, typ. -150 dBm |
|   | 13.6 GHz ≤ f < 18 GHz  | -144 dBm, typ. -148 dBm |
|   | 18 GHz ≤ f < 23 GHz  | -141 dBm, typ. -145 dBm |
|   | 23 GHz ≤ f < 30 GHz  | -137 dBm, typ. -141 dBm |
|   | 30 GHz ≤ f ≤ 34 GHz  | -135 dBm, typ. -139 dBm |
|   | 34 GHz < f ≤ 43.5 GHz  | -131 dBm, typ. -135 dBm |
|   | 43.5 GHz < f ≤ 47 GHz  | -127 dBm, typ. -131 dBm |
|   | 47 GHz < f ≤ 49 GHz  | -124 dBm, typ. -128 dBm |
|   | 49 GHz < f ≤ 50 GHz  | -122 dBm, typ. -126 dBm |
|   | 50 GHz < f ≤ 55 GHz  | -141 dBm, typ. -143 dBm |
|   | 55 GHz < f ≤ 62 GHz  | -137 dBm, typ. -139 dBm |
|   | 62 GHz < f ≤ 67 GHz  | -133 dBm, typ. -135 dBm |
|   | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |                         |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off           |                         |
|   | 8 GHz ≤ f < 13.6 GHz   | -148 dBm, typ. -152 dBm |
|   | 13.6 GHz ≤ f < 18 GHz  | -146 dBm, typ. -150 dBm |
|   | 18 GHz ≤ f < 23 GHz  | -143 dBm, typ. -147 dBm |
|   | 23 GHz ≤ f < 30 GHz  | -139 dBm, typ. -142 dBm |
|   | 30 GHz ≤ f ≤ 34 GHz  | -137 dBm, typ. -140 dBm |
|   | 34 GHz < f ≤ 43.5 GHz  | -133 dBm, typ. -136 dBm |
|   | 43.5 GHz < f ≤ 47 GHz  | -129 dBm, typ. -132 dBm |
|   | 47 GHz < f ≤ 49 GHz  | -126 dBm, typ. -129 dBm |
|   | 49 GHz < f ≤ 50 GHz  | -125 dBm, typ. -128 dBm |
|   | 50 GHz < f ≤ 55 GHz  | -141 dBm, typ. -142 dBm |
|   | 55 GHz < f ≤ 62 GHz  | -137 dBm, typ. -139 dBm |
|   | 62 GHz < f ≤ 67 GHz  | -133 dBm, typ. -135 dBm |
| Improvement with noise cancellation                                       | for noise-like signals   |                         |
|   | 2 Hz < f ≤ 43 GHz  | 13 dB (nom.)            |
|   | 43 GHz < f ≤ 67 GHz  | 8 dB (nom.)             |


| <b>Displayed average noise level of the R&amp;S®FSW67 with R&amp;S®FSW-B24 option</b> |  |
|---|--|
| RF preamplifier off   | RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C                   |
|   | 2 Hz ≤ f ≤ 100 Hz -110 dBm   |
|   | 100 Hz < f ≤ 1 kHz -120 dBm  |
|   | 1 kHz < f < 9 kHz -135 dBm   |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on |
|   | 9 kHz ≤ f ≤ 1 MHz -145 dBm   |
|   | 1 MHz < f ≤ 1 GHz -149 dBm   |
|   | 1 GHz < f < 3 GHz <sup>7</sup> -150 dBm  |
|   | 1 GHz < f < 3 GHz <sup>8</sup> -153 dBm  |
|   | 3 GHz ≤ f < 8 GHz -150 dBm   |
|   | 8 GHz ≤ f < 13.6 GHz -144 dBm  |
|   | 13.6 GHz ≤ f < 18 GHz -142 dBm   |
|   | 18 GHz ≤ f < 23 GHz -139 dBm   |
|   | 23 GHz ≤ f < 30 GHz -135 dBm   |
|   | 30 GHz ≤ f ≤ 34 GHz -132 dBm   |
|   | 34 GHz < f ≤ 43.5 GHz -128 dBm   |
|   | 43.5 GHz < f ≤ 47 GHz -124 dBm   |
|   | 47 GHz < f ≤ 49 GHz -121 dBm   |
|   | 49 GHz < f ≤ 50 GHz -119 dBm   |
|   | 50 GHz < f ≤ 55 GHz -138 dBm   |
|   | 55 GHz < f ≤ 62 GHz -134 dBm   |
|   | 62 GHz < f ≤ 67 GHz -130 dBm   |
|   | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |
|   | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off           |
|   | 8 GHz ≤ f < 13.6 GHz -146 dBm  |
|   | 13.6 GHz ≤ f < 18 GHz -144 dBm   |
|   | 18 GHz ≤ f < 23 GHz -141 dBm   |
|   | 23 GHz ≤ f < 30 GHz -137 dBm   |
|   | 30 GHz ≤ f ≤ 34 GHz -134 dBm   |
|   | 34 GHz < f ≤ 43.5 GHz -130 dBm   |
|   | 43.5 GHz < f ≤ 47 GHz -126 dBm   |
|   | 47 GHz < f ≤ 49 GHz -123 dBm   |
|   | 49 GHz < f ≤ 50 GHz -122 dBm   |
| 50 GHz < f ≤ 55 GHz -138 dBm  |  |
| 55 GHz < f ≤ 62 GHz -134 dBm  |  |
| 62 GHz < f ≤ 67 GHz -130 dBm  |  |

|  |   |              |
|--|---|--------------|
| RF preamplifier = 30 dB  | RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on |              |
|  | 100 kHz < f ≤ 1 MHz   | -160 dBm     |
|  | 1 MHz < f ≤ 3 GHz   | -165 dBm     |
|  | 3 GHz < f ≤ 8 GHz   | -162 dBm     |
|  | 8 GHz < f ≤ 18 GHz  | -161 dBm     |
|  | 18 GHz < f ≤ 26.5 GHz   | -160 dBm     |
|  | 26.5 GHz < f ≤ 35 GHz   | -159 dBm     |
|  | 35 GHz < f ≤ 42 GHz   | -157 dBm     |
|  | R&S®FSW-B24 option, model .66   |              |
|  | 42 GHz < f ≤ 43 GHz   | -150 dBm     |
|  | 43 GHz < f ≤ 47 GHz   | -146 dBm     |
|  | 47 GHz < f ≤ 50 GHz   | -144 dBm     |
|  | 50 GHz < f ≤ 54 GHz   | -148 dBm     |
|  | 54 GHz < f ≤ 56 GHz   | -146 dBm     |
|  | 56 GHz < f ≤ 62 GHz   | -144 dBm     |
|  | 62 GHz < f ≤ 65 GHz   | -142 dBm     |
|  | 65 GHz < f ≤ 67 GHz   | -140 dBm     |
|  | R&S®FSW-B24 option, model .67   |              |
|  | 42 GHz < f ≤ 47 GHz   | -150 dBm     |
|  | 47 GHz < f ≤ 50 GHz   | -146 dBm     |
|  | 50 GHz < f ≤ 52 GHz   | -154 dBm     |
| 52 GHz < f ≤ 54 GHz  | -152 dBm  |              |
| 54 GHz < f ≤ 62 GHz  | -150 dBm  |              |
| 62 GHz < f ≤ 67 GHz  | -147 dBm  |              |
| add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed |   |              |
| Improvement with noise cancellation  | for noise-like signals  |              |
|  | R&S®FSW-B24 option, model .66   |              |
|  | 100 kHz < f ≤ 43 GHz  | 13 dB (nom.) |
|  | 43 GHz < f ≤ 67 GHz   | 0 dB (nom.)  |
|  | R&S®FSW-B24 option, model .67   |              |
| 100 kHz < f ≤ 67 GHz   | 13 dB (nom.)  |              |

| Displayed average noise level of the R&S®FSW85 |  |
|--|--|
|  | RF input 1, RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C   |
|  | 2 Hz ≤ f ≤ 100 Hz -105 dBm, typ. -115 dBm  |
|  | 100 Hz < f ≤ 1 kHz -110 dBm, typ. -120 dBm   |
|  | 1 kHz < f < 9 kHz -125 dBm, typ. -137 dBm  |
|  | RF input 1, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, f ≥ 8 GHz: YIG preselector on                           |
|  | 9 kHz ≤ f ≤ 1 MHz -135 dBm, typ. -140 dBm  |
|  | 1 MHz < f ≤ 1 GHz -145 dBm, typ. -150 dBm  |
|  | 1 GHz < f < 3 GHz <sup>7</sup> -151 dBm, typ. -156 dBm   |
|  | 1 GHz < f < 3 GHz <sup>8</sup> -154 dBm, typ. -159 dBm   |
|  | 3 GHz ≤ f < 8 GHz -151 dBm, typ. -156 dBm  |
|  | 8 GHz ≤ f < 13.6 GHz -146 dBm, typ. -150 dBm   |
|  | 13.6 GHz ≤ f < 18 GHz -144 dBm, typ. -148 dBm  |
|  | 18 GHz ≤ f < 23 GHz -141 dBm, typ. -145 dBm  |
|  | 23 GHz ≤ f < 30 GHz -137 dBm, typ. -141 dBm  |
|  | 30 GHz ≤ f ≤ 34 GHz -135 dBm, typ. -139 dBm  |
|  | 34 GHz < f ≤ 44 GHz -129 dBm, typ. -133 dBm  |
|  | 44 GHz < f ≤ 58 GHz -137 dBm, typ. -141 dBm  |
|  | 58 GHz < f ≤ 70 GHz -132 dBm, typ. -136 dBm  |
|  | 70 GHz < f ≤ 75 GHz -127 dBm, typ. -130 dBm  |
|  | 75 GHz < f ≤ 80 GHz -122 dBm, typ. -125 dBm  |
|  | 80 GHz < f ≤ 85 GHz -120 dBm, typ. -123 dBm  |
|  | add 1 dB to the above values for frequencies < 8 GHz, if the R&S®FSW-B1200/-B2001/-B800R option is installed   |
|  | RF input 1, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector off, R&S®FSW-B90G option for f > 85 GHz |
|  | 8 GHz ≤ f < 13.6 GHz -148 dBm  |
|  | 13.6 GHz ≤ f < 18 GHz -146 dBm   |
|  | 18 GHz ≤ f < 23 GHz -143 dBm   |
|  | 23 GHz ≤ f < 30 GHz -139 dBm   |
|  | 30 GHz ≤ f ≤ 34 GHz -137 dBm   |
|  | 34 GHz < f ≤ 44 GHz -131 dBm   |
|  | 44 GHz < f ≤ 58 GHz -147 dBm   |
|  | 58 GHz < f ≤ 70 GHz -143 dBm   |
|  | 70 GHz < f ≤ 78 GHz -135 dBm   |
|  | 78 GHz < f ≤ 85 GHz -130 dBm   |
|  | 85 GHz < f ≤ 88 GHz -125 dBm   |
|  | 88 GHz < f ≤ 90 GHz -120 dBm   |
|  | RF input 2, RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C  |
|  | add 1 dB to the above values for frequencies > 44 GHz  |
| Improvement with noise cancellation            | for noise-like signals   |
|  | f ≤ 43 GHz 13 dB (nom.)  |
|  | f > 43 GHz   |
|  | YIG preselector on 13 dB (nom.)  |
|  | YIG preselector off 0 dB (nom.)  |

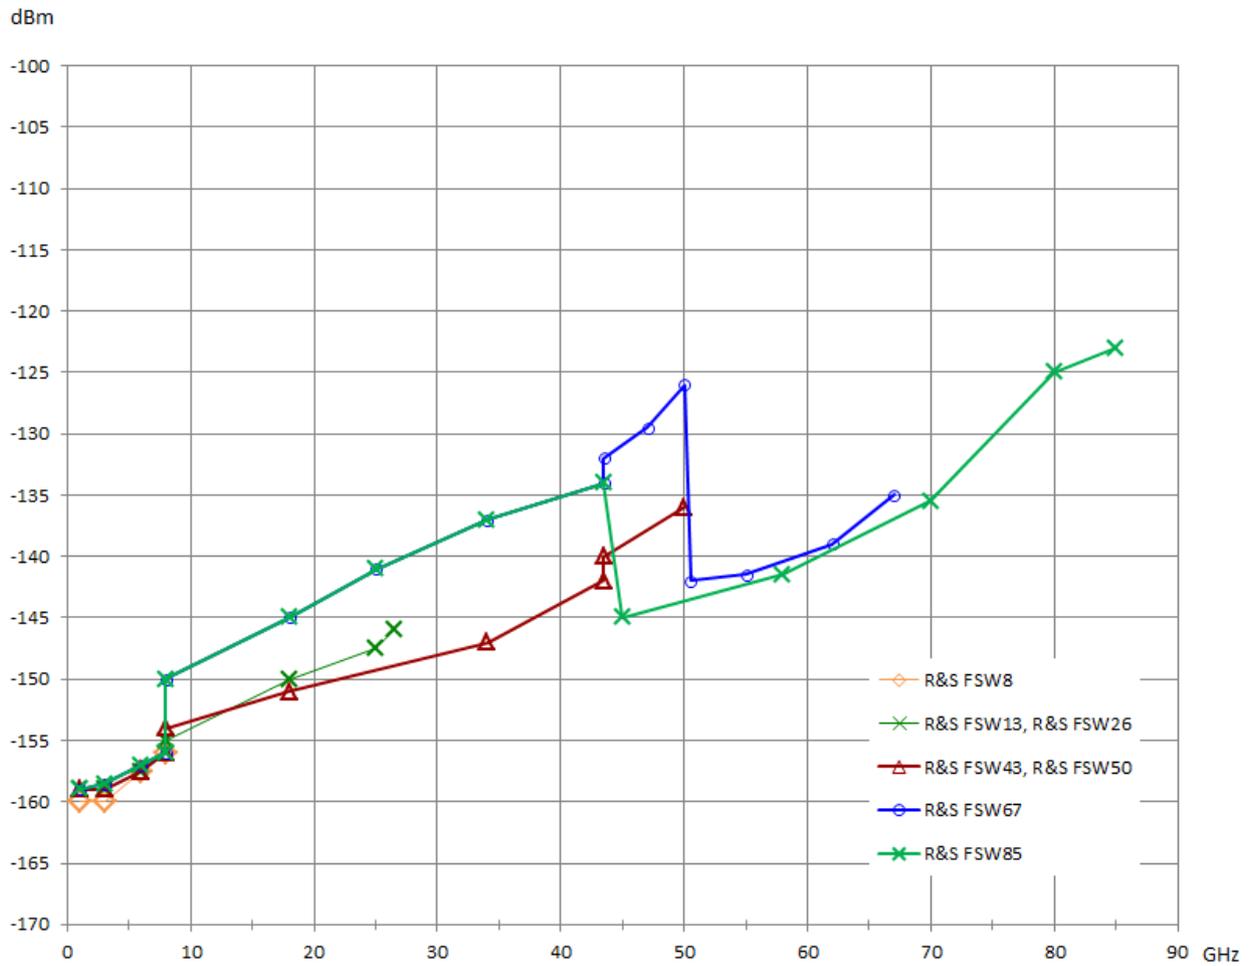

Typical displayed average noise level of the R&S®FSW models for  $f > 1$  GHz without R&S®FSW-B24 RF preamplifier option.

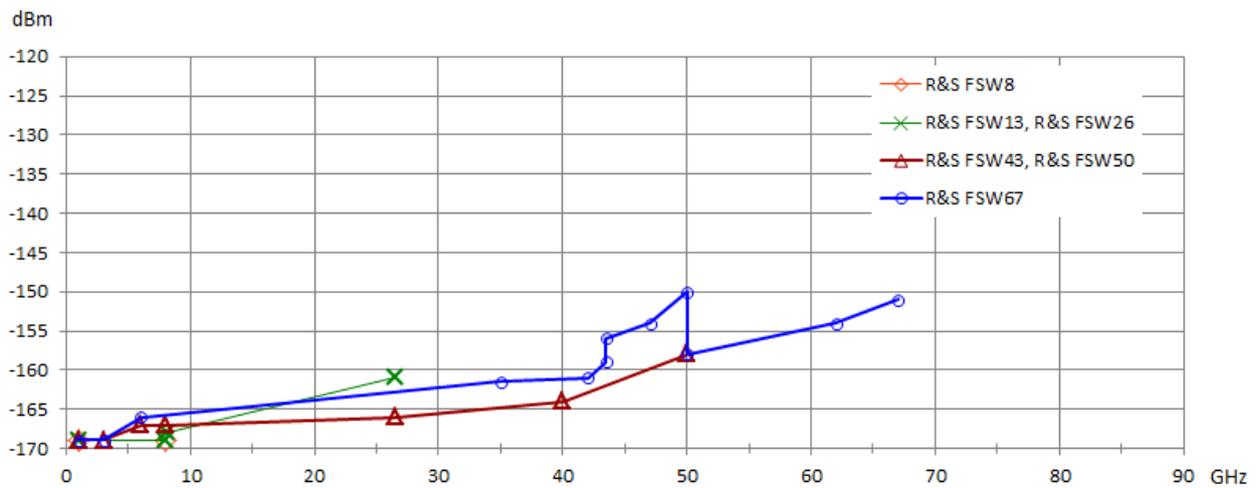

Typical displayed average noise level of the R&S®FSW models for  $f > 1$  GHz with R&S®FSW-B24<sup>10</sup> RF preamplifier option, preamplifier gain = 30 dB.

<sup>10</sup> For frequencies > 43 GHz, the curve shown for the R&S®FSW50 applies to the R&S®FSW-B24 option model .51, the curve shown for the R&S®FSW67 applies to the R&S®FSW-B24 option model .67.

## Spurious responses

|                                   |   |   |
|-----------------------------------|---|---|
| <b>Spurious responses</b>         | YIG preselector on for $f \geq 8$ GHz, mixer level $\leq -10$ dBm <sup>11</sup> , sweep optimization: auto or dynamic |   |
| Image response                    | $f_{in} - 2 \times 8997$ MHz (1st IF)   | < -90 dBc   |
|                                   | $f_{in} - 2 \times 1317$ MHz (2nd IF)   | < -90 dBc   |
|                                   | $f_{in} - 2 \times 37$ MHz (3rd IF)   | < -90 dBc   |
| Intermediate frequency response   | 1st IF (8997 MHz)   | < -90 dBc   |
|                                   | 2nd IF (1317 MHz)   | < -90 dBc   |
|                                   | 3rd IF (37 MHz)   | < -90 dBc   |
| Residual spurious response        | RF attenuation = 0 dB   |   |
|                                   | $f \leq 1$ MHz  | < -90 dBm   |
|                                   | $1 \text{ MHz} < f \leq 8900$ MHz   | < -110 dBm  |
|                                   | $8900 \text{ MHz} < f \leq 26.5$ GHz  | < -100 dBm  |
|                                   | $26.5 \text{ GHz} < f \leq 85$ GHz  | < -100 dBm  |
| $f$ = receive frequency           |   |   |
| Local oscillator related spurious | $f_{in} < 1$ GHz  |   |
|                                   | $10 \text{ Hz} \leq \text{offset from carrier} < 200$ Hz  | < -90 dBc   |
|                                   | offset from carrier > 200 Hz  | < -100 dBc  |
|                                   | $f_{in} \geq 1$ GHz   |   |
|                                   | $10 \text{ Hz} \leq \text{offset from carrier} < 200$ Hz  | < -90 dBc + 20 log ( $f_{in}/\text{GHz}$ )        |
|                                   | offset from carrier > 200 Hz  |   |
|                                   | $f \leq 50$ GHz   | < -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )       |
|                                   | $f > 50$ GHz, RBW $\leq 10$ kHz   | < -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )       |
|                                   | $f > 50$ GHz, RBW > 10 kHz  | < -80 dBc + 20 log ( $f_{in}/\text{GHz}$ )        |
|                                   | $f$ = receive frequency   |   |
| Vibrational environmental stimuli | max. 0.21 g RMS   | < -60 dBc + 20 log ( $f_{in}/\text{GHz}$ ) (nom.) |

<sup>11</sup> Mixer level = signal level – RF attenuation + preamplifier gain.

## Level measurement uncertainty

|   |   |  |
|---|---|--|
| Absolute level uncertainty at 64 MHz  | RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB                  |  |
|   | without R&S®FSW-B25 option or electronic attenuator off   | < 0.2 dB ( $\sigma = 0.07$ dB)               |
|   | with R&S®FSW-B25 option, electronic attenuator on   | < 0.4 dB ( $\sigma = 0.14$ dB)               |
| Frequency response, referenced to 64 MHz, YIG preselector on  | RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off |  |
|   | 2 Hz $\leq$ f < 9 kHz   | < 1 dB (nom.)                                |
|   | 9 kHz $\leq$ f < 10 MHz   | < 0.45 dB ( $\sigma = 0.17$ dB)              |
|   | 10 MHz $\leq$ f < 3.6 GHz <sup>12</sup>   | < 0.3 dB ( $\sigma = 0.10$ dB)               |
|   | 10 MHz $\leq$ f < 3.6 GHz <sup>13</sup>   | < 0.5 dB ( $\sigma = 0.17$ dB)               |
|   | 3.6 GHz $\leq$ f $\leq$ 8 GHz   | < 0.5 dB ( $\sigma = 0.17$ dB)               |
|   | 8 GHz < f < 22 GHz, span < 1 GHz  | < 1.5 dB ( $\sigma = 0.50$ dB)               |
|   | 22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz   | < 2 dB ( $\sigma = 0.67$ dB)                 |
|   | 26.5 GHz < f $\leq$ 50 GHz, span < 1 GHz  | < 2.5 dB ( $\sigma = 0.83$ dB)               |
|   | 50 GHz < f $\leq$ 67 GHz, span < 1 GHz  | < 3.0 dB ( $\sigma = 1.0$ dB)                |
|   | 67 GHz < f $\leq$ 85 GHz, span < 1 GHz  | < 3.5 dB ( $\sigma = 1.17$ dB)               |
|   | any RF attenuation or electronic attenuator on, +15 °C to +40 °C                                  |  |
|   | 2 Hz $\leq$ f < 9 kHz   | < 1 dB (nom.)                                |
|   | 9 kHz $\leq$ f < 3.6 GHz  | < 0.6 dB ( $\sigma = 0.20$ dB)               |
|   | 3.6 GHz $\leq$ f $\leq$ 8 GHz   | < 0.8 dB ( $\sigma = 0.27$ dB)               |
|   | 8 GHz < f < 22 GHz, span < 1 GHz  | < 2 dB ( $\sigma = 0.67$ dB)                 |
|   | 22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz   | < 2.5 dB ( $\sigma = 0.83$ dB)               |
|   | 26.5 GHz < f $\leq$ 50 GHz, span < 1 GHz  | < 3 dB ( $\sigma = 1.0$ dB)                  |
|   | 50 GHz < f $\leq$ 67 GHz, span < 1 GHz  | < 3.5 dB ( $\sigma = 1.17$ dB)               |
|   | 67 GHz < f $\leq$ 85 GHz, span < 1 GHz  | < 4.0 dB ( $\sigma = 1.33$ dB)               |
|   | RF attenuation $\leq$ 20 dB, RF preamplifier on, +20 °C to +30 °C                                 |  |
|   | 10 MHz $\leq$ f < 3.6 GHz   | < 0.6 dB ( $\sigma = 0.2$ dB)                |
|   | 3.6 GHz $\leq$ f $\leq$ 8 GHz   | < 0.8 dB ( $\sigma = 0.27$ dB)               |
|   | 8 GHz < f < 22 GHz, span < 1 GHz  | < 2 dB ( $\sigma = 0.67$ dB)                 |
|   | 22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz   | < 2.5 dB ( $\sigma = 0.83$ dB)               |
|   | 26.5 GHz < f $\leq$ 50 GHz, span < 1 GHz  | < 3 dB ( $\sigma = 1.0$ dB)                  |
|   | 50 GHz < f $\leq$ 67 GHz, span < 1 GHz  | < 3.5 dB ( $\sigma = 1.17$ dB)               |
| Frequency response, referenced to 64 MHz, YIG preselector off (requires R&S®FSW-B90G option for f > 85 GHz) | RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C, electronic attenuator off |  |
|   | f < 8 GHz   | same values as with preselector on           |
|   | 8 GHz $\leq$ f < 22 GHz   | < 1.5 dB ( $\sigma = 0.5$ dB)                |
|   | 22 GHz $\leq$ f $\leq$ 26.5 GHz   | < 2 dB ( $\sigma = 0.6$ dB)                  |
|   | 26.5 GHz < f $\leq$ 67 GHz, span < 1 GHz  | < 2.5 dB ( $\sigma = 0.83$ dB)               |
|   | 67 GHz < f $\leq$ 90 GHz, span < 1 GHz  | < 3 dB ( $\sigma = 1.0$ dB)                  |
|   | any RF attenuation or electronic attenuator on, +15 °C to +40 °C                                  |  |
|   | f < 8 GHz   | same values as with preselector on           |
|   | 8 GHz $\leq$ f < 22 GHz   | < 2 dB ( $\sigma = 0.6$ dB)                  |
|   | 22 GHz $\leq$ f $\leq$ 26.5 GHz   | < 2.5 dB ( $\sigma = 0.75$ dB)               |
|   | 26.5 GHz < f $\leq$ 67 GHz, span < 1 GHz  | < 3 dB ( $\sigma = 1.0$ dB)                  |
|   | 67 GHz < f $\leq$ 90 GHz, span < 1 GHz  | < 3.5 dB ( $\sigma = 1.17$ dB)               |
|   | RF attenuation $\leq$ 20 dB, RF preamplifier on, +20 °C to +30 °C                                 |  |
|   | f < 8 GHz   | same values as with preselector on           |
|   | 8 GHz $\leq$ f < 22 GHz   | < 2 dB ( $\sigma = 0.6$ dB)                  |
|   | 22 GHz $\leq$ f $\leq$ 26.5 GHz   | < 2.5 dB ( $\sigma = 0.75$ dB)               |
|   | 26.5 GHz < f $\leq$ 67 GHz, span < 1 GHz  | < 3 dB ( $\sigma = 1.0$ dB)                  |
| Attenuator switching uncertainty  | f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation  | < 0.2 dB ( $\sigma = 0.07$ dB)               |
| Uncertainty of reference level setting  | input mixer level $\leq$ -15 dBm  | 0 dB <sup>14</sup>                           |
|   | input mixer level > -15 dBm   | < 0.1 dB (nom.)                              |
| Bandwidth switching uncertainty   | referenced to RBW = 10 kHz  | < 0.1 dB ( $\sigma = 0.04$ dB) <sup>15</sup> |

<sup>12</sup> With R&S®FSW8, R&S®FSW13, R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67.

<sup>13</sup> With R&S®FSW85.

<sup>14</sup> The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself. The reference level setting causes no additional uncertainty in measurement results.

<sup>15</sup> Nominal values for RBW = 3.9 kHz and RBW = 6.25 kHz.

| Nonlinearity of displayed level |                                      |                                 |
|---------------------------------|--------------------------------------|---------------------------------|
| Logarithmic level display       | S/N > 16 dB, 0 dB ≤ level ≤ -70 dB   | < 0.1 dB ( $\sigma = 0.04$ dB)  |
|                                 | S/N > 16 dB, -70 dB < level ≤ -90 dB | < 0.2 dB ( $\sigma = 0.08$ dB)  |
| Linear level display            | S/N > 16 dB, 0 dB to -70 dB          | < 5 % of reference level (nom.) |

| Total measurement uncertainty   |   |          |
|---|---|----------|
| YIG preselector on  | signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C |          |
|   | 9 kHz ≤ f ≤ 10 MHz  | ±0.37 dB |
|   | 10 MHz < f ≤ 3.6 GHz  | ±0.27 dB |
|   | 3.6 GHz < f ≤ 8 GHz   | ±0.37 dB |
|   | 8 GHz < f ≤ 22 GHz  | ±1.4 dB  |
|   | 22 GHz < f ≤ 26.5 GHz   | ±1.7 dB  |
|   | 26.5 GHz < f ≤ 50 GHz   | ±2.5 dB  |
|   | 50 GHz < f ≤ 67 GHz   | ±2.8 dB  |
| YIG preselector off<br>(requires R&S®FSW-B90G option<br>for f > 85 GHz) | signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, span/RBW < 100, 95 % confidence level, +20 °C to +30 °C |          |
|   | 8 GHz ≤ f ≤ 22 GHz  | ±1.0 dB  |
|   | 22 GHz < f ≤ 26.5 GHz   | ±1.2 dB  |
|   | 26.5 GHz < f ≤ 67 GHz   | ±1.7 dB  |
|   | 67 GHz < f ≤ 90 GHz   | ±2.0 dB  |

## Adjacent channel power dynamic range

| Adjacent channel leakage ratio (ACLR) | 3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz |               |
|---------------------------------------|---|---------------|
|                                       | noise cancellation off <sup>16</sup>                          |               |
|                                       | 1st adjacent channel  | -76 dB (nom.) |
|                                       | 2nd adjacent channel  | -82 dB (nom.) |
|                                       | noise cancellation on   |               |
|                                       | 1st adjacent channel  | -88 dB (nom.) |
| 2nd adjacent channel                  | -90 dB (nom.)   |               |

| Optimum mixer level  | 3GPP WCDMA, single carrier, 1 DPCH, carrier frequency = 2 GHz |                |
|----------------------|---|----------------|
|                      | noise cancellation off  |                |
|                      | 1st adjacent channel  | -5 dBm (nom.)  |
|                      | 2nd adjacent channel  | 0 dBm (nom.)   |
|                      | noise cancellation on   |                |
|                      | 1st adjacent channel  | -12 dBm (nom.) |
| 2nd adjacent channel | -5 dBm (nom.)   |                |

<sup>16</sup> Noise cancellation off represents the raw performance of the R&S®FSW without numeric compensation for its inherent noise.

## Trigger functions

| <b>Trigger</b>                   |  |  |
|----------------------------------|--|--|
| Trigger source                   | spectrum analysis                                      | free run, video, external, IF power, RF power          |
|                                  | I/Q analyzer or modulation analysis                    | I/Q trigger additionally <sup>17</sup>                 |
| Trigger offset                   | span $\geq$ 10 Hz                                      | 5 ns to 20 s   |
|                                  | span = 0 Hz  | (–sweep time) to 20 s                                  |
| Min. trigger offset resolution   | span > 0 Hz  | 5 ns   |
|                                  | span = 0 Hz, trigger offset > 0                        | 5 ns   |
|                                  | span = 0 Hz, trigger offset < 0                        | sweep time/number of sweep points                      |
| Max. deviation of trigger offset |  | 5 ns   |
| <b>IF power trigger</b>          |  |  |
| Sensitivity                      | min. signal power                                      |  |
|                                  | spectrum analysis                                      | –60 dBm + RF attenuation – RF preamplifier gain (nom.) |
|                                  | I/Q analyzer or modulation analysis                    |  |
|                                  | set analysis bandwidth $\leq$ 80 MHz                   | –60 dBm + RF attenuation – RF preamplifier gain (nom.) |
|                                  | set analysis bandwidth > 80 MHz                        | –30 dBm + RF attenuation – RF preamplifier gain (nom.) |
| max. signal power                | –10 dBm + RF attenuation – RF preamplifier gain (nom.) |  |
| IF power trigger bandwidth       | RBW > 500 kHz  | 20 MHz (nom.) <sup>18</sup>                            |
|                                  | RBW $\leq$ 500 kHz, FFT                                | 20 MHz (nom.)  |
|                                  | RBW $\leq$ 500 kHz, swept                              | 6 MHz (nom.)   |
| <b>RF power trigger</b>          |  |  |
| Sensitivity                      | min. signal power                                      | –30 dBm + RF attenuation – RF preamplifier gain (nom.) |
|                                  | max. signal power                                      | +10 dBm + RF attenuation – RF preamplifier gain (nom.) |
| RF power trigger frequency range | f $\leq$ 8 GHz   | 8 GHz (nom.)   |
|                                  | f > 8 GHz  | center frequency $\pm$ 250 MHz (nom.) <sup>19</sup>    |
| <b>Gated sweep</b>               |  |  |
| Gate source                      |  | video, external, IF power, RF power                    |
| Gate delay                       |  | 5 ns to 20 s, min. resolution 5 ns                     |
| Gate length                      |  | 5 ns to 20 s, min. resolution 5 ns                     |
| Max. deviation of gate length    |  | $\pm$ 5 ns   |

## Audio demodulator

| <b>Demodulation</b>               |  |                            |
|-----------------------------------|--|----------------------------|
| AF demodulation types             |  | AM and FM                  |
| Audio output                      |  | loudspeaker and phone jack |
| Marker stop time in spectrum mode |  | 100 ms to 60 s             |

<sup>17</sup> Not available for analysis bandwidth > 160 MHz if the R&S®FSW-B320 option is installed.

<sup>18</sup> Sweep optimization = auto.

## I/Q data

The specifications in this section apply to the base unit and the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options.

For specifications of the R&S®FSW-B2000/-B5000 options, see sections “R&S®FSW-B2000 2 GHz analysis bandwidth” and “R&S®FSW-B5000 5 GHz analysis bandwidth”.

|                            |  |                           |
|----------------------------|--|---------------------------|
| Record length              | standard   |                           |
|                            | with R&S®FSW-B28/-B40/-B80/-B160/-B512/-B512R options      | max. 440 Msample I and Q  |
|                            | with R&S®FSW-B320 option                                   | max. 195 Msample I and Q  |
|                            | with R&S®FSW-B1200/-B2001/-B800R options                   | max. 220 Msample I and Q  |
|                            | R&S®FSW-B106 option (requires R&S®FSW-B160/-B320 options)  |                           |
|                            | ≤ 160 MHz analysis bandwidth                               | max. 1320 Msample I and Q |
|                            | 320 MHz analysis bandwidth                                 | max. 600 Msample I and Q  |
| Word length of I/Q samples | sampling rate > 100 MHz or number of samples > 300 Msample | 18 bit                    |
|                            | otherwise  | 24 bit                    |

|  |  |   |
|--|--|---|
| Sampling rate                              | standard   | 100 Hz to 200 MHz   |
|  | with R&S®FSW-B28/-B40/-B80 options   | 100 Hz to 200 MHz   |
|  | with R&S®FSW-B160/-B320 options  | 100 Hz to 1 GHz   |
|  | with R&S®FSW-B512/-B512R option  | 100 Hz to 1.2 GHz   |
|  | with R&S®FSW-B1200 option  | 100 Hz to 2.4 GHz   |
|  | with R&S®FSW-B2001/-B800R option   | 100 Hz to 2.4 GHz   |
| Max. signal analysis bandwidth (equalized) | standard   | 10 MHz (nom.)   |
|  | with R&S®FSW-B28 option  | 28 MHz (nom.) <sup>19</sup>   |
|  | with R&S®FSW-B40 option  | 40 MHz (nom.) <sup>19</sup>   |
|  | with R&S®FSW-B80 option  | 80 MHz (nom.) <sup>19</sup>   |
|  | with R&S®FSW-B160 option   | 160 MHz (nom.) <sup>19</sup>  |
|  | with R&S®FSW-B320 option   | 320 MHz (nom.) <sup>19</sup>  |
|  | with R&S®FSW-B512/-B512R option  | 512 MHz (nom.) <sup>19</sup>  |
|  | with R&S®FSW-B1200 option  | 1200 MHz (nom.) <sup>20</sup>   |
| with R&S®FSW-B2001/-B800R option           | 2000 MHz (nom.) <sup>20</sup>  |   |
| <b>Signal analysis bandwidth ≤ 80 MHz</b>  |  |   |
| Amplitude flatness                         | $(1.25 \times \text{signal analysis BW}) \leq f_{\text{center}} < 8 \text{ GHz}$ | ±0.3 dB (nom.) <sup>21</sup>  |
|  | $f_{\text{center}} \geq 8 \text{ GHz}$ , YIG preselector off                     | ±0.5 dB (nom.)  |
| Deviation from linear phase                | $(1.25 \times \text{signal analysis BW}) \leq f_{\text{center}} < 8 \text{ GHz}$ | ±1° (nom.)  |
|  | $f_{\text{center}} \geq 8 \text{ GHz}$ , YIG preselector off                     | ±2° (nom.)  |
| Nonlinearity of displayed level            |  | see section “Level measurement uncertainty – Nonlinearity of displayed level” |
| Level measurement uncertainty              |  | see “Total measurement uncertainty – YIG preselector off”                     |
| Third-order intermodulation distortion     |  | see “Third-order intercept point (TOI)”                                       |
| ADC related spurious response              | mixer level = -30 dBm <sup>22</sup>  |   |
|  | analysis bandwidth < 17 MHz  | -100 dBc (nom.)   |
|  | 17 MHz ≤ analysis bandwidth < 80 MHz   | -80 dBc (nom.)  |
| Other spurious responses                   |  | see section “Spurious responses”  |

<sup>19</sup> YIG preselector off for  $f \geq 8 \text{ GHz}$ .

<sup>20</sup> YIG preselector off for  $f \geq 12 \text{ GHz}$ .

<sup>21</sup> For R&S®FSW67 and R&S®FSW85:  $100 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ .

<sup>22</sup> Level of a tone at the input mixer (also abbreviated as mixer level) = signal level – RF attenuation + preamplifier gain.

| <b>Signal analysis bandwidth 80 MHz to 160 MHz</b> <sup>23</sup> |  |                                |
|--|--|--------------------------------|
| Amplitude flatness   | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz  |                                |
|  | $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 0.5 \text{ dB (nom.)}$    |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$   | $\pm 0.7 \text{ dB (nom.)}$    |
|  | $8 \text{ GHz} \leq f_{\text{center}} < 26.5 \text{ GHz}$  | $\pm 1 \text{ dB (nom.)}$      |
|  | $26.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$  | $\pm 2 \text{ dB (nom.)}$      |
| Deviation from linear phase                                      | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz  |                                |
|  | $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 1^\circ \text{ (nom.)}$   |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$   | $\pm 2^\circ \text{ (nom.)}$   |
|  | $8 \text{ GHz} \leq f_{\text{center}} < 43.5 \text{ GHz}$  | $\pm 1.5^\circ \text{ (nom.)}$ |
|  | $43.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$  | $\pm 2^\circ \text{ (nom.)}$   |
| Nonlinearity of displayed level                                  | 0 dB to -70 dB   |                                |
|  | $< 0.15 \text{ dB (nom.)}$   |                                |
| Level measurement uncertainty at center frequency                | add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"   |                                |
| Third-order intermodulation distortion                           | reference level = signal level + 6 dB  |                                |
|  | $150 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ :<br>two -20 dBm tones at input mixer within analysis bandwidth <sup>22</sup> ,<br>$f_{\text{center}} \geq 8 \text{ GHz}$ :<br>two -30 dBm tones at input mixer within analysis bandwidth <sup>22</sup> | -75 dBc (nom.)                 |
| Residual spurious response                                       | RF attenuation 0 dB, $f_{\text{center}} \geq 150 \text{ MHz}$  | -90 dBm (nom.)                 |
| ADC related spurious response                                    | single tone within analysis bandwidth, mixer level = -10 dBm <sup>22</sup> , reference level = signal level, $f_{\text{center}} \geq 150 \text{ MHz}$  | -78 dBc (nom.)                 |
| Other spurious responses   | see section "Spurious responses"   |                                |

| <b>Signal analysis bandwidth <math>\leq 96</math> MHz within R&amp;S®FSW-K193 DOCSIS 3.1 OFDM upstream option</b> <sup>25</sup> |  |                              |
|---|--|------------------------------|
| Amplitude flatness  | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off  |                              |
|   | $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$  | $\pm 0.6 \text{ dB (nom.)}$  |
| Deviation from linear phase   | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off  |                              |
|   | $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$  | $\pm 2^\circ \text{ (nom.)}$ |
| Nonlinearity of displayed level   | 0 dB to -70 dB   |                              |
| Level measurement uncertainty at center frequency   | add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off"   |                              |
| Third-order intermodulation distortion  | reference level = signal level + 6 dB  |                              |
|   | $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$ :<br>two -20 dBm tones at input mixer within analysis bandwidth <sup>22</sup> ,                              | -75 dBc (nom.)               |
| Residual spurious response  | RF attenuation 0 dB, $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$   | -90 dBm (nom.)               |
| ADC related spurious response   | single tone within analysis bandwidth, mixer level = -10 dBm <sup>22</sup> , reference level = signal level, $5 \text{ MHz} \leq f \leq 204 \text{ MHz}$ | -78 dBc (nom.)               |
| Other spurious responses  | see section "Spurious responses"   |                              |

<sup>23</sup> The specifications for 80 MHz to 160 MHz analysis bandwidth in this section apply to the following options: R&S®FSW-B160, R&S®FSW-B320.

<sup>24</sup>  $f_{\text{center}} > 85 \text{ GHz}$  requires R&S®FSW-B90G option.

<sup>25</sup> The specifications in this section apply in combination with the R&S®FSW-B320 option or R&S®FSW-B512 option.

| Signal analysis bandwidth 160 MHz to 320 MHz <sup>26</sup> |  |  |
|--|--|--|
| Amplitude flatness   | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz  |  |
|  | $200 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 0.7 \text{ dB (nom.)}$  |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 7 \text{ GHz}$   | $\pm 1.2 \text{ dB (nom.)}$  |
|  | $7 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$ <sup>27</sup>   | $\pm 1.4 \text{ dB (nom.)}$  |
|  | $8 \text{ GHz} \leq f_{\text{center}} < 22 \text{ GHz}$  | $\pm 1.6 \text{ dB (nom.)}$  |
|  | $22 \text{ GHz} \leq f_{\text{center}} \leq 43.5 \text{ GHz}$  | $\pm 2 \text{ dB (nom.)}$  |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$   | $\pm 2.5 \text{ dB (nom.)}$  |
| Deviation from linear phase                                | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz  |  |
|  | $200 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 2.5^\circ \text{ (nom.)}$   |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 8 \text{ GHz}$ <sup>27</sup>   | $\pm 4^\circ \text{ (nom.)}$   |
|  | $8 \text{ GHz} \leq f_{\text{center}} < 43.5 \text{ GHz}$  | $\pm 2.5^\circ \text{ (nom.)}$   |
|  | $43.5 \text{ GHz} \leq f_{\text{center}} \leq 67 \text{ GHz}$  | $\pm 4^\circ \text{ (nom.)}$   |
| Nonlinearity of displayed level                            | $0 \text{ dB to } -70 \text{ dB}$  | $< 0.15 \text{ dB (nom.)}$   |
|  | Level measurement uncertainty at center frequency  | add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off" |
| Third-order intermodulation distortion                     | reference level = signal level + 6 dB  |  |
|  | $200 \text{ MHz} \leq f_{\text{center}} < 8 \text{ GHz}$ :<br>two $-20 \text{ dBm}$ tones at input mixer within analysis bandwidth <sup>22</sup> ,<br>$f_{\text{center}} \geq 8 \text{ GHz}$ :<br>two $-30 \text{ dBm}$ tones at input mixer within analysis bandwidth <sup>22</sup> | $-75 \text{ dBc (nom.)}$   |
| Residual spurious response                                 | RF attenuation 0 dB, $f_{\text{center}} \geq 200 \text{ MHz}$  | $-90 \text{ dBm (nom.)}$   |
| ADC related spurious response                              | single tone within analysis bandwidth, mixer level = $-10 \text{ dBm}$ <sup>22</sup> , reference level = signal level  |  |
|  | $200 \text{ MHz} \leq f_{\text{center}} \leq 460 \text{ MHz}$  | $-70 \text{ dBc (nom.)}$   |
| Other spurious responses                                   | $f_{\text{center}} > 460 \text{ MHz}$  | $-72 \text{ dBc (nom.)}$   |
|  | see section "Spurious responses"   |  |

<sup>26</sup> The specifications for 160 MHz to 320 MHz analysis bandwidth in this section apply to the R&S®FSW-B320 option.

<sup>27</sup> To obtain the set analysis bandwidth,  $(f_{\text{center}} + \frac{1}{2} \text{ analysis bandwidth}) \leq 8 \text{ GHz}$  must be met.

| Signal analysis bandwidth 80 MHz to 512 MHz with R&S®FSW-B512 option or R&S®FSW-B512R option |  |  |
|--|--|--|
| Amplitude flatness   | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz  |  |
|  | analysis bandwidth $\leq 160$ MHz  |  |
|  | $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 0.4 \text{ dB (nom.)}$  |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$  | $\pm 0.6 \text{ dB (nom.)}$  |
|  | analysis bandwidth $\leq 500$ MHz  |  |
|  | $260 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 0.5 \text{ dB (nom.)}$  |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}^{27}$   | $\pm 0.7 \text{ dB (nom.)}$  |
|  | analysis bandwidth $\leq 512$ MHz  |  |
|  | $460 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 0.5 \text{ dB (nom.)}$  |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}^{27}$   | $\pm 0.7 \text{ dB (nom.)}$  |
|  | any analysis bandwidth   |  |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 26.5 \text{ GHz}$  | $\pm 1.0 \text{ dB (nom.)}$  |
|  | $26.5 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$   | $\pm 1.5 \text{ dB (nom.)}$  |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$   | $\pm 2 \text{ dB (nom.)}$  |
| $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$                 | $\pm 2.5 \text{ dB (nom.)}$  |  |
| Deviation from linear phase  | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off for $f \geq 8$ GHz  |  |
|  | analysis bandwidth $\leq 160$ MHz  |  |
|  | $150 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 1^\circ \text{ (nom.)}$   |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$  | $\pm 2^\circ \text{ (nom.)}$   |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$  | $\pm 1.5^\circ \text{ (nom.)}$   |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$   | $\pm 2^\circ \text{ (nom.)}$   |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$   | $\pm 8^\circ \text{ (nom.)}$   |
|  | analysis bandwidth $\leq 500$ MHz  |  |
|  | $260 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 1.5^\circ \text{ (nom.)}$   |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$  | $\pm 2^\circ \text{ (nom.)}$   |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$  | $\pm 3^\circ \text{ (nom.)}$   |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$   | $\pm 5^\circ \text{ (nom.)}$   |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$   | $\pm 8^\circ \text{ (nom.)}$   |
|  | analysis bandwidth $\leq 512$ MHz  |  |
|  | $460 \text{ MHz} \leq f_{\text{center}} < 4 \text{ GHz}$   | $\pm 1.5^\circ \text{ (nom.)}$   |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$  | $\pm 2^\circ \text{ (nom.)}$   |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$  | $\pm 3^\circ \text{ (nom.)}$   |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$   | $\pm 5^\circ \text{ (nom.)}$   |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$   | $\pm 8^\circ \text{ (nom.)}$   |
| Nonlinearity of displayed level  | 0 dB to $-70$ dB   | $< 0.15 \text{ dB (nom.)}$   |
| Level measurement uncertainty at center frequency  |  | add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off" |
| Third-order intermodulation distortion   | reference level = signal level + 6 dB  |  |
|  | $f_{\text{center}} \leq 8 \text{ GHz}$ :<br>two $-20 \text{ dBm}$ tones at input mixer within analysis bandwidth <sup>22</sup><br>$f_{\text{center}} > 8 \text{ GHz}$ :<br>two $-25 \text{ dBm}$ tones at input mixer within analysis bandwidth <sup>22</sup> , YIG preselector off                              | $-70 \text{ dBc (nom.)}$   |
| Residual spurious response   | RF attenuation 0 dB, analysis bandwidth $\leq 160$ MHz and $f_{\text{center}} \geq 150$ MHz, or analysis bandwidth $\leq 512$ MHz and $f_{\text{center}} \geq 650$ MHz, YIG preselector off for $f \geq 8$ GHz   | $-90 \text{ dBm (nom.)}$   |
| ADC related spurious response  | single tone at center frequency  | $-78 \text{ dBc (nom.)}$   |
|  | single tone within analysis bandwidth, mixer level = $-15 \text{ dBm}$ <sup>22</sup> , reference level = signal level, analysis bandwidth $\leq 160$ MHz and $f_{\text{center}} \geq 150$ MHz, or analysis bandwidth $\leq 512$ MHz and $f_{\text{center}} \geq 260$ MHz, YIG preselector off for $f \geq 8$ GHz | $-70 \text{ dBc (nom.)}$   |
| Other spurious responses   |  | see section "Spurious responses"   |

| <b>Signal analysis bandwidth 80 MHz to 1200 MHz with R&amp;S®FSW-B1200 option and 80 MHz to 2000 MHz with R&amp;S®FSW-B2001/B800R option (options available for all models except R&amp;S®FSW8, R&amp;S®FSW13)</b> |   |  |
|--|---|--|
| The specifications in this section apply to the following conditions: YIG preselector off for $f \geq 12$ GHz, $+20$ °C to $+30$ °C.   |   |  |
| Frequency range (center frequency)   | analysis bandwidth = 1200 MHz   | 650 MHz to maximum receiving frequency – 600 MHz   |
|  | analysis bandwidth = 2000 MHz   | 1050 MHz to maximum receiving frequency – 1000 MHz |
| Amplitude flatness   | RF attenuation = 10 / 20 / 30 / 40 dB, RF preamplifier off, electronic attenuator off |  |
|  | analysis bandwidth $\leq 1200$ MHz  |  |
|  | $650 \text{ MHz}^{28} \leq f_{\text{center}} < 8 \text{ GHz}$                         | $\pm 1.0$ dB, ( $\sigma = 0.33$ dB)                |
|  | $8 \text{ GHz} \leq f_{\text{center}} < 22 \text{ GHz}$                               | $\pm 1.2$ dB, ( $\sigma = 0.40$ dB)                |
|  | $22 \text{ GHz} \leq f_{\text{center}} \leq 26.5 \text{ GHz}$                         | $\pm 1.4$ dB, ( $\sigma = 0.47$ dB)                |
|  | $26.5 \text{ GHz} < f_{\text{center}} \leq 42.9 \text{ GHz}$                          | $\pm 1.6$ dB, ( $\sigma = 0.53$ dB)                |
|  | $42.9 \text{ GHz} < f_{\text{center}} \leq 50 \text{ GHz}$                            | $\pm 1.7$ dB, ( $\sigma = 0.57$ dB)                |
|  | $50 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$                              | $\pm 2.0$ dB, ( $\sigma = 0.67$ dB)                |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{24}$          | $\pm 2.5$ dB, ( $\sigma = 0.83$ dB)                |
|  | analysis bandwidth $\leq 2000$ MHz  |  |
|  | $1050 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$                        | $\pm 1.0$ dB, ( $\sigma = 0.33$ dB)                |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 42.5 \text{ GHz}$                             | $\pm 2.0$ dB, ( $\sigma = 0.67$ dB)                |
|  | $42.5 \text{ GHz} < f_{\text{center}} \leq 66.5 \text{ GHz}$                          | $\pm 2.5$ dB, ( $\sigma = 0.83$ dB)                |
|  | $66.5 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}/90 \text{ GHz}^{29}$        | $\pm 3.0$ dB, ( $\sigma = 1.0$ dB)                 |
| Deviation from linear phase  | RF attenuation = 10 / 20 / 30 / 40 dB, RF preamplifier off, electronic attenuator off |  |
|  | analysis bandwidth $\leq 160$ MHz   |  |
|  | $150 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$                         | $\pm 1^\circ$ (nom.)                               |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$                             | $\pm 2^\circ$ (nom.)                               |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$                             | $\pm 1.5^\circ$ (nom.)                             |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$                            | $\pm 2^\circ$ (nom.)                               |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$                              | $\pm 8^\circ$ (nom.)                               |
|  | analysis bandwidth $\leq 500$ MHz   |  |
|  | $260 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$                         | $\pm 1.5^\circ$ (nom.)                             |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$                             | $\pm 2^\circ$ (nom.)                               |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$                             | $\pm 3^\circ$ (nom.)                               |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$                            | $\pm 5^\circ$ (nom.)                               |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$                              | $\pm 8^\circ$ (nom.)                               |
|  | analysis bandwidth $\leq 512$ MHz   |  |
|  | $460 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$                         | $\pm 1.5^\circ$ (nom.)                             |
|  | $4 \text{ GHz} \leq f_{\text{center}} \leq 8 \text{ GHz}$                             | $\pm 2^\circ$ (nom.)                               |
|  | $8 \text{ GHz} < f_{\text{center}} \leq 43.5 \text{ GHz}$                             | $\pm 3^\circ$ (nom.)                               |
|  | $43.5 \text{ GHz} < f_{\text{center}} \leq 67 \text{ GHz}$                            | $\pm 5^\circ$ (nom.)                               |
|  | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$                              | $\pm 8^\circ$ (nom.)                               |
|  | analysis bandwidth $\leq 1200$ MHz  |  |
|  | $650 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$                         | $\pm 2.5^\circ$ (nom.)                             |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 13 \text{ GHz}$                               | $\pm 5^\circ$ (nom.)                               |
|  | $13 \text{ GHz} \leq f_{\text{center}} \leq 37 \text{ GHz}$                           | $\pm 3.5^\circ$ (nom.)                             |
|  | $37 \text{ GHz} < f_{\text{center}} \leq 40 \text{ GHz}$                              | $\pm 4^\circ$ (nom.)                               |
|  | $40.0 \text{ GHz} < f_{\text{center}} \leq 42.9 \text{ GHz}$                          | $\pm 6^\circ$ (nom.)                               |
|  | $42.9 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$                            | $\pm 7^\circ$ (nom.)                               |
|  | analysis bandwidth $\leq 2000$ MHz  |  |
|  | $1050 \text{ MHz}^{28} \leq f_{\text{center}} < 4 \text{ GHz}$                        | $\pm 3^\circ$ (nom.)                               |
|  | $4 \text{ GHz} \leq f_{\text{center}} < 13 \text{ GHz}$                               | $\pm 7^\circ$ (nom.)                               |
|  | $13 \text{ GHz} \leq f_{\text{center}} \leq 37 \text{ GHz}$                           | $\pm 5^\circ$ (nom.)                               |
| $37 \text{ GHz} < f_{\text{center}} \leq 40 \text{ GHz}$   | $\pm 6^\circ$ (nom.)  |  |
| $40.0 \text{ GHz} < f_{\text{center}} \leq 42.5 \text{ GHz}$   | $\pm 8^\circ$ (nom.)  |  |
| $42.5 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$   | $\pm 10^\circ$ (nom.)   |  |

<sup>28</sup> For R&S®FSW85 instruments the specification starts at 1 GHz center frequency for analysis bandwidths  $\leq 1200$  MHz and at 1.5 GHz center frequency for analysis bandwidths  $> 1200$  MHz.

<sup>29</sup>  $f_{\text{center}} > 66.5$  GHz requires R&S®FSW85.  $f_{\text{center}} > 85$  GHz requires R&S®FSW-B90G option.

|   |   |  |
|---|---|--|
| Nonlinearity of displayed level                   | 0 dB to -70 dB  | < 0.15 dB (nom.)   |
| Level measurement uncertainty at center frequency |   | add 0.2 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off" |
| Third-order intermodulation distortion            | reference level = signal level + 6 dB<br>$f_{\text{center}} \leq 8 \text{ GHz}$ :<br>two -20 dBm tones at input mixer within analysis bandwidth <sup>22</sup><br>$f_{\text{center}} > 8 \text{ GHz}$ :<br>two -25 dBm tones at input mixer within analysis bandwidth <sup>22</sup> ,<br>YIG preselector off | -70 dBc (nom.)   |
| Residual spurious response                        | RF attenuation = 0 dB<br>analysis bandwidth $\leq 160 \text{ MHz}$<br>$f_{\text{center}} \geq 150 \text{ MHz}$  | -90 dBm (nom.)   |
|   | analysis bandwidth $\leq 512 \text{ MHz}$<br>$f_{\text{center}} \geq 650 \text{ MHz}$   | -90 dBm (nom.)   |
|   | analysis bandwidth $\leq 1200 \text{ MHz}$<br>$700 \text{ MHz} \leq f_{\text{center}} < 8.1 \text{ GHz}$  | -80 dBm (nom.)   |
|   | $8.1 \text{ GHz} \leq f_{\text{center}} < 9.4 \text{ GHz}$  | -65 dBm (nom.)   |
|   | $9.4 \text{ GHz} \leq f_{\text{center}} \leq 12 \text{ GHz}$  | -80 dBm (nom.)   |
|   | $12 \text{ GHz} < f_{\text{center}} \leq 30 \text{ GHz}$  | -90 dBm (nom.)   |
|   | $30 \text{ GHz} < f_{\text{center}}$  | -80 dBm (nom.)   |
|   | analysis bandwidth $\leq 2000 \text{ MHz}$<br>$1100 \text{ MHz} \leq f_{\text{center}} < 7.75 \text{ GHz}$  | -80 dBm (nom.)   |
|   | $7.75 \text{ GHz} \leq f_{\text{center}} < 9.8 \text{ GHz}$   | -60 dBm (nom.)   |
|   | $9.8 \text{ GHz} \leq f_{\text{center}} \leq 12 \text{ GHz}$  | -80 dBm (nom.)   |
|   | $12 \text{ GHz} < f_{\text{center}} \leq 30 \text{ GHz}$  | -90 dBm (nom.)   |
|   | $30 \text{ GHz} < f_{\text{center}}$  | -80 dBm (nom.)   |
| ADC related spurious response                     | single tone within analysis bandwidth, mixer level = -20 dBm <sup>22</sup> ,<br>reference level = signal level<br>analysis bandwidth < 200 MHz  | -80 dBc (nom.)   |
|   | $200 \text{ MHz} \leq \text{analysis bandwidth} \leq 512 \text{ MHz}$   | -75 dBc (nom.)   |
|   | $512 \text{ MHz} < \text{analysis bandwidth} \leq 1200 \text{ MHz}$   | -65 dBc (nom.)   |
|   | $1200 \text{ MHz} < \text{analysis bandwidth} \leq 2000 \text{ MHz}$  | -60 dBc (nom.)   |
| Other spurious responses                          |   | see section "Spurious responses"   |

## Inputs and outputs

| RF input  |   |  |
|---|---|--|
| Impedance   |   | 50 $\Omega$                                    |
| Connector   | R&S®FSW8, R&S®FSW13   | N female                                       |
|   | R&S®FSW26   | APC 3.5 mm male (compatible with SMA)          |
|   | R&S®FSW43   | 2.92 mm male (compatible with SMA)             |
|   | R&S®FSW50, R&S®FSW67  | 1.85 mm male (compatible with 2.4 mm)          |
|   | R&S®FSW85, RF1 input  | 1.00 mm male                                   |
|   | R&S®FSW85, RF2 input  | 1.85 mm male (compatible with 2.4 mm)          |
| VSWR of R&S®FSW8  | RF attenuation $\leq 4$ dB                                    |  |
|   | 10 MHz $\leq f \leq 8$ GHz                                    | typ. 1.87 <sup>30</sup>                        |
|   | 5 dB $\leq$ RF attenuation $\leq 9$ dB                        |  |
|   | 10 MHz $\leq f < 1$ GHz                                       | < 1.5, typ. 1.20 <sup>30</sup>                 |
|   | 10 MHz $\leq f < 3.6$ GHz                                     | < 1.5, typ. 1.31 <sup>30</sup>                 |
|   | 3.6 GHz $\leq f \leq 8$ GHz                                   | < 2.0, typ. 1.51 <sup>30</sup>                 |
|   | RF attenuation $\geq 10$ dB                                   |  |
|   | 10 MHz $\leq f < 1$ GHz                                       | < 1.2, typ. 1.09 <sup>30</sup>                 |
|   | 1 GHz $\leq f < 3.6$ GHz                                      | < 1.5, typ. 1.19 <sup>30</sup>                 |
|   | 3.6 GHz $\leq f \leq 8$ GHz                                   | < 2.0, typ. 1.42 <sup>30</sup>                 |
| VSWR of R&S®FSW13   | RF attenuation $\leq 4$ dB                                    |  |
|   | 10 MHz $\leq f \leq 13.6$ GHz                                 | typ. 1.87 <sup>30</sup>                        |
|   | 5 dB $\leq$ RF attenuation $\leq 9$ dB                        |  |
|   | 10 MHz $\leq f < 3.6$ GHz                                     | < 1.5, typ. 1.25 <sup>30</sup>                 |
|   | 3.6 GHz $\leq f \leq 13.6$ GHz                                | < 2.0, typ. 1.29 <sup>30</sup>                 |
|   | RF attenuation $\geq 10$ dB                                   |  |
|   | 10 MHz $\leq f < 1$ GHz                                       | < 1.2, typ. 1.10 <sup>30</sup>                 |
|   | 1 GHz $\leq f < 3.6$ GHz                                      | < 1.5, typ. 1.14 <sup>30</sup>                 |
|   | 3.6 GHz $\leq f \leq 13.6$ GHz                                | < 2.0, typ. 1.22 <sup>30</sup>                 |
|   | VSWR of R&S®FSW26, R&S®FSW43, R&S®FSW50, R&S®FSW67, R&S®FSW85 | RF attenuation $\leq 4$ dB                     |
| 10 MHz $\leq f \leq 26.5$ GHz                             |   | typ. 1.87 <sup>30,31</sup>                     |
| 26.5 GHz $< f \leq 40$ GHz                                |   | typ. 2.0 <sup>30</sup>                         |
| 40 GHz $< f \leq 70$ GHz                                  |   | 2.0 (nom.)                                     |
| 70 GHz $< f \leq 85$ GHz/90 GHz <sup>24</sup>             |   | 2.4 (nom.)                                     |
| 5 dB $\leq$ RF attenuation $\leq 9$ dB                    |   |  |
| 10 MHz $\leq f \leq 3.5$ GHz                              |   | < 1.5, typ. 1.24 <sup>30,31</sup>              |
| 3.5 GHz $< f \leq 8$ GHz                                  |   | < 1.8, typ. 1.26 <sup>30</sup>                 |
| 8 GHz $< f \leq 18$ GHz                                   |   | < 1.8, typ. 1.39 <sup>30</sup>                 |
| 18 GHz $< f \leq 26.5$ GHz                                |   | < 2.0, typ. 1.43 <sup>30</sup>                 |
| 26.5 GHz $< f \leq 40$ GHz                                |   | < 2.5, typ. 1.8 <sup>30</sup>                  |
| 40 GHz $< f \leq 70$ GHz                                  |   | 2.0 (nom.)                                     |
| 70 GHz $< f \leq 85$ GHz/90 GHz <sup>24</sup>             |   | 2.4 (nom.)                                     |
| RF attenuation $\geq 10$ dB                               |   |  |
| 10 MHz $\leq f \leq 3.5$ GHz                              |   | < 1.2, typ. 1.12 <sup>30,31</sup>              |
| 3.5 GHz $< f \leq 8$ GHz                                  |   | < 1.5, typ. 1.19 <sup>30</sup>                 |
| 8 GHz $< f \leq 18$ GHz                                   |   | < 1.5, typ. 1.25 <sup>30</sup>                 |
| 18 GHz $< f \leq 26.5$ GHz                                |   | < 2.0, typ. 1.37 <sup>30</sup>                 |
| 26.5 GHz $< f \leq 40$ GHz                                |   | < 2.5, typ. 1.7 <sup>30</sup>                  |
| 40 GHz $< f \leq 70$ GHz                                  |   | 2.0 (nom.)                                     |
| 70 GHz $< f \leq 85$ GHz/90 GHz <sup>24</sup>             |   | 2.4 (nom.)                                     |
| R&S®FSW85, input coupling AC, RF attenuation $\geq 10$ dB |   |  |
| 50 MHz $\leq f \leq 3.5$ GHz                              |   | < 1.5, typ. 1.19 <sup>30</sup>                 |
| R&S®FSW85 RF input 2                                      |   |  |
| add 0.2 to the above values (nom.)                        |   |  |
| Setting range of attenuator                               |   | 0 dB to 79 dB, in 1 dB steps <sup>32, 33</sup> |

<sup>30</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

<sup>31</sup> R&S®FSW85: specification applies to input coupling DC.

<sup>32</sup> R&S®FSW8 to R&S®FSW67: Mechanical RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

<sup>33</sup> R&S®FSW85: Mechanical RF attenuator: 10 dB steps. Electronic IF attenuator: 1 dB steps.

| <b>Probe power supply</b> |  |   |
|---------------------------|--|---|
| Supply voltages           |  | +15 V DC, -12.6 V DC and ground, max. 150 mA (nom.) |

| <b>Noise source control</b> |  |  |
|-----------------------------|--|--|
| Connector                   |  | BNC female                               |
| Output voltage              |  | 0 V/28 V, max. 100 mA, switchable (nom.) |

| <b>Power sensor</b> |  |   |
|---------------------|--|---|
| Connector           |  | 6-pin LEMOSA female for R&S®NRP-Zxx power sensors |

| <b>USB interface</b> |  |                                   |
|----------------------|--|-----------------------------------|
|                      |  | 7 ports, type A plug, version 2.0 |
|                      |  | 1 port, type B plug, version 2.0  |

| <b>AF output</b>             |  |   |
|------------------------------|--|---|
| Connector                    |  | 3.5 mm mini-jack                        |
| Output impedance             |  | 10 Ω (nom.)                             |
| Open-circuit voltage         |  | up to 1.5 V, adjustable                 |
| <b>External trigger/gate</b> |  |   |
| Number of ports              |  | 1 × input, 2 × input/output, selectable |
| Connector                    |  | BNC female                              |
| Trigger input voltage        |  | 0.5 V to 3.5 V (nom.)                   |
| Trigger output voltage       |  | TTL-compatible, 0 V/5 V (nom.)          |
| Impedance                    |  | 10 kΩ (nom.)                            |

| <b>Reference input 1 MHz to 20 MHz</b> |  |   |
|--|--|---|
| Connector                              |  | BNC female                                      |
| Impedance                              |  | 50 Ω (nom.)                                     |
| Input frequency range                  |  | 1 MHz ≤ f <sub>in</sub> ≤ 20 MHz, in 1 Hz steps |
| Required level                         |  | > 0 dBm   |

| <b>Reference input 100 MHz</b> |  |                 |
|--------------------------------|--|-----------------|
| Connector                      |  | SMA female      |
| Impedance                      |  | 50 Ω (nom.)     |
| Input frequency range          |  | 100 MHz         |
| Required level                 |  | 0 dBm to 10 dBm |

| <b>Reference output 10 MHz</b> |  |               |
|--------------------------------|--|---------------|
| Connector                      |  | BNC female    |
| Impedance                      |  | 50 Ω (nom.)   |
| Output frequency               |  | 10 MHz        |
| Level                          |  | 10 dBm (nom.) |

| <b>Reference output 1 MHz to 20 MHz</b> |                    |                                |
|---|--------------------|--------------------------------|
| Connector                               |                    | BNC female                     |
| Impedance                               |                    | 50 Ω (nom.)                    |
| Output frequency                        | internal reference | not active                     |
|   | external reference | same as reference input signal |
| Level                                   |                    | same as reference input signal |

| <b>Reference output 100 MHz</b> |  |              |
|---------------------------------|--|--------------|
| Connector                       |  | SMA female   |
| Impedance                       |  | 50 Ω (nom.)  |
| Output frequency                |  | 100 MHz      |
| Level                           |  | 6 dBm (nom.) |

| <b>Reference output 640 MHz</b> |  |                    |
|---------------------------------|--|--------------------|
| Connector                       |  | SMA female         |
| Impedance                       |  | 50 $\Omega$ (nom.) |
| Output frequency                |  | 640 MHz            |
| Level                           |  | 16 dBm (nom.)      |

| <b>IF/video output</b> |   |                                |
|------------------------|---|--------------------------------|
| Connector              |   | BNC female, 50 $\Omega$ (nom.) |
| <b>IF out</b>          |   |                                |
| Bandwidth              |   | equal to RBW setting           |
| IF frequency           |   | (RBW/2) to (240 MHz – RBW/2)   |
| Output level           | center frequency > 10 MHz, span = 0 Hz<br>or I/Q analyzer on, signal at reference<br>level and center frequency | 0 dBm (nom.)                   |
| <b>Video out</b>       |   |                                |
| Bandwidth              |   | equal to VBW setting           |
| Output scaling         | log. display scale<br>lin. display scale  | logarithmic<br>linear          |
| Output level           | center frequency > 10 MHz, span = 0 Hz,<br>signal at reference level and center<br>frequency                    | 1 V at 50 $\Omega$ load (nom.) |

| <b>IF wide output (with R&amp;S®FSW-B160/B320/-B512/-B512R option only)</b> |   |  |
|---|---|--|
| Connector   | R&S®FSW-B160 or R&S®FSW-B320<br>R&S®FSW-B512  | BNC female, 50 $\Omega$ (nom.)<br>SMA female, 50 $\Omega$ (nom.) |
| IF frequency  | center frequency $\geq$ 200 MHz   | 50 MHz to 550 MHz (nom.)   |
| Max. bandwidth (6 dB)   | YIG preselector off   | 500 MHz  |
| Output level  | RF attenuation = auto,<br>reference level $\geq$ –15 dBm,<br>signal level = reference level | –20 dBm (nom.)   |
| <b>Aux port</b>   |   |  |
| Connector   |   | 9-pin D-Sub male   |
| Output  |   | TTL-compatible, 0 V/5 V (nom.),<br>max. 15 mA (nom.)             |
| Input   |   | TTL-compatible, max. 5 V (nom.)                                  |

| <b>IF output 2 GHz (R&amp;S®FSW26, R&amp;S®FSW43, R&amp;S®FSW50, R&amp;S®FSW67 and R&amp;S®FSW85 only, not available with R&amp;S®FSW-B1200/-B2001/-B800R option)</b> |             |   |
|---|-------------|---|
| Connector   |             | SMA female, 50 $\Omega$ (nom.)                            |
| RF frequency range  | span = 0 Hz | 8 GHz to the maximum frequency of the<br>instrument model |
| IF frequency  | center      | 2 GHz   |

| <b>IEC/IEEE bus control</b> |  |  |
|-----------------------------|--|--|
| Command set                 |  | interface in line with<br>IEC 625-2 (IEEE 488.2)                           |
| Connector                   |  | SCPI 1997.0  |
| Interface functions         |  | 24-pin Amphenol female<br>SH1, AH1, T6, L4, SR1, RL1, PP1, DC1,<br>DT1, C0 |

| <b>LAN interface</b> |  |                            |
|----------------------|--|----------------------------|
| Connector            |  | 10/100/1000BASE-T<br>RJ-45 |

| <b>External monitor</b> |  |                            |
|-------------------------|--|----------------------------|
| Connector               |  | DVI-D, DisplayPort Rev 1.1 |

| <b>Synchronization input</b> |  |       |
|------------------------------|--|-------|
| Connector                    |  | HDMI™ |

| <b>Synchronization output</b> |  |       |
|-------------------------------|--|-------|
| Connector                     |  | HDMI™ |

## General data

|                    |  |  |
|--------------------|--|--|
| <b>Display</b>     |  | 30.7 cm (12.1") WXGA color touchscreen |
| Resolution         |  | 1280 × 800 pixel (WXGA resolution)     |
| Pixel failure rate |  | $< 1 \times 10^{-5}$                   |

|                     |          |  |
|---------------------|----------|--|
| <b>Data storage</b> |          |  |
| Internal            | standard | solid state disk $\geq 32$ Gbyte           |
| External            |          | supports USB 2.0 compatible memory devices |

|                    |                               |  |
|--------------------|-------------------------------|--|
| <b>Temperature</b> |                               |  |
| Temperature        | operating temperature range   | +5 °C to +50 °C <sup>34</sup>  |
|                    | permissible temperature range | 0 °C to +55 °C <sup>34</sup>   |
|                    | storage temperature range     | -40 °C to +70 °C   |
| Climatic loading   |                               | +40 °C at 90 % rel. humidity, in line with EN 60068-2-30, without condensation |

|                         |                 |                             |
|-------------------------|-----------------|-----------------------------|
| <b>Altitude</b>         |                 |                             |
| Max. operating altitude | above sea level | 4600 m (approx. 15100 feet) |

|                              |            |   |
|------------------------------|------------|---|
| <b>Mechanical resistance</b> |            |   |
| Vibration                    | sinusoidal | 5 Hz to 55 Hz<br>displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz);<br>55 Hz to 150 Hz<br>acceleration: 0.5 g constant<br>in line with EN 60068-2-6 |
|                              | random     | 10 Hz to 300 Hz,<br>acceleration 1.2 g (RMS),<br>in line with EN 60068-2-64   |
| Shock                        |            | 40 g shock spectrum,<br>in line with MIL-STD-810E method no. 516.4, procedure I,<br>MIL-PRF-28800F, class 3   |

|            |  |   |
|------------|--|---|
| <b>EMC</b> |  | in line with EMC Directive 2014/30/EU including:<br>IEC/EN 61326-1 <sup>35, 36</sup><br>IEC/EN 61326-2-1<br>CISPR 11/EN 55011 <sup>35</sup><br>IEC/EN 61000-3-2<br>IEC/EN 61000-3-3 |
|------------|--|---|

|   |  |        |
|---|--|--------|
| <b>Recommended calibration interval</b> |  | 1 year |
|---|--|--------|

|                 |             |         |
|-----------------|-------------|---------|
| <b>Warranty</b> | base unit   | 3 years |
|                 | accessories | 1 year  |

<sup>34</sup> With built-in R&S®FSW-B512R option, the upper operating and permissible temperature with active real-time analysis is limited to +45 °C.

With built-in R&S®FSW-B800R option, the upper operating and permissible temperature with active real-time analysis is limited to +40 °C.

<sup>35</sup> Emission limits for class A equipment apply.

<sup>36</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

| <b>Power supply</b>    |                      |   |
|------------------------|----------------------|---|
| AC input voltage range |                      | 100 V to 240 V  |
| AC supply frequency    |                      | 50 Hz to 60 Hz/400 Hz   |
| Max. input current     |                      | 7.3 A (100 V) to 4.6 A (240 V)  |
| Power consumption      | R&S®FSW8             | 150 W without options,<br>250 W with all options (meas.) <sup>37</sup>            |
|                        | R&S®FSW13, R&S®FSW26 | 175 W without options,<br>275 W with all options (meas.) <sup>37</sup>            |
|                        | R&S®FSW43, R&S®FSW50 | 200 W without options,<br>300 W with all options (meas.) <sup>37</sup>            |
|                        | R&S®FSW67            | 220 W without options,<br>320 W with all options (meas.) <sup>37</sup>            |
|                        | R&S®FSW85            | 230 W without options,<br>330 W with all options (meas.) <sup>37</sup>            |
| Safety                 |                      | in line with IEC 61010-1, EN 61010-1,<br>UL 61010-1,<br>CAN/CSA-C22.2 No. 61010-1 |
| Test mark              |                      | VDE-GS, cCSA <sub>Us</sub>  |

| <b>Dimensions and weight</b>  |                       |   |
|---|-----------------------|---|
| Dimensions (nom.)<br>(W × H × D, including front handles and rear feet) | R&S®FSW8 to R&S®FSW67 | 462 mm × 240 mm × 504 mm<br>(18.15 in × 9.44 in × 19.81 in) |
|   | R&S®FSW85             | 462 mm × 240 mm × 610 mm<br>(18.15 in × 9.44 in × 24.01 in) |
| Net weight without options (nom.)                                       | R&S®FSW8              | 18.6 kg (41.01 lb)  |
|   | R&S®FSW13             | 20.2 kg (44.53 lb)  |
|   | R&S®FSW26             | 20.2 kg (44.53 lb)  |
|   | R&S®FSW43, R&S®FSW50  | 20.9 kg (46.07 lb)  |
|   | R&S®FSW67             | 23.6 kg (52.03 lb)  |
|   | R&S®FSW85             | 26.6 kg (58.64 lb)  |

<sup>37</sup> All options except R&S®FSW-B512R/-B1200/-B2001/-B800R.  
For R&S®FSW-B512R add 130 W to the power consumption.  
For R&S®FSW-B1200/-B2001/-B800R add 200 W to the power consumption.

## Options

### R&S®FSW-B10 external generator control

| Interface            |  |                        |
|----------------------|--|------------------------|
| IEC/IEEE bus control |  | 24-pin Amphenol female |
| Aux control          |  | 9-pin D-Sub female     |

|                                    |  |   |
|------------------------------------|--|---|
| <b>Supported signal generators</b> |  | R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMA100B, R&S®SMB100A, R&S®SMB100B, R&S®SMBV100A, R&S®SMBV100B, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY |
|------------------------------------|--|---|

### R&S®FSW-B13 highpass filters

| Frequency       |          |                   |
|-----------------|----------|-------------------|
| Frequency range | filter 1 | 1 GHz to 1.75 GHz |
|                 | filter 2 | 1.75 GHz to 3 GHz |

| Stopband attenuation |          |                |
|----------------------|----------|----------------|
| 500 MHz to 875 MHz   | filter 1 | > 20 dB (nom.) |
| 875 MHz to 1.5 GHz   | filter 2 | > 20 dB (nom.) |

| Other specifications          |  |                             |
|-------------------------------|--|-----------------------------|
| Level measurement uncertainty |  | see base unit specification |
| Displayed average noise level |  |                             |
| Intermodulation               |  |                             |
| Measurement uncertainty       |  |                             |

### R&S®FSW-B17 digital baseband interface

| I/Q data IN       |                         |   |
|-------------------|-------------------------|---|
| Interface         |                         | LVDS                                    |
|                   | connector               | 26-pin female MDR (Mini D Ribbon)       |
| Transfer protocol |                         | R&S®Digital I/Q Interface <sup>38</sup> |
| User data         | sample rate             | 100 sample/s to 200 Msample/s (nom.)    |
|                   | resolution              | 18 bit for I and 18 bit for Q           |
|                   | general purpose signals | 2 bit                                   |

| I/Q data OUT       |  |   |
|--------------------|--|---|
| Interface          |  | LVDS                                    |
|                    | connector  | 26-pin female MDR (Mini D Ribbon)       |
| Transfer protocol  |  | R&S®Digital I/Q Interface <sup>38</sup> |
| User data          | sample rate  | 100 sample/s to 200 Msample/s (nom.)    |
|                    | resolution   | 18 bit for I and 18 bit for Q           |
| Max. I/Q bandwidth | standard   | 10 MHz                                  |
|                    | with R&S®FSW-B28 option  | 28 MHz                                  |
|                    | with R&S®FSW-B40 option  | 40 MHz                                  |
|                    | with R&S®FSW-B80 option  | 80 MHz                                  |
|                    | with R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R option | 160 MHz                                 |

<sup>38</sup> R&S®Digital I/Q Interface is a Rohde & Schwarz company standard for the transmission of digital I/Q data.

It is supported by a wide range of instruments (signal generators, signal analyzers and communications testers).

## R&S®FSW-B517 DIG IQ 40G streaming out interface

|                    |                                  |   |
|--------------------|----------------------------------|---|
| Interface          | direction                        | I/Q data OUT                            |
|                    | connector                        | QSFP+                                   |
|                    | transfer data rate               | 40 Gbps                                 |
| Output channel     |                                  | 16 bit, 600 Msample/s                   |
| User data          | sample rate                      | 100.1 Msample/s to 600 Msample/s (nom.) |
|                    | resolution                       | 16 bit for I and 16 bit for Q           |
| Min. I/Q bandwidth |                                  | 80 MHz                                  |
| Max. I/Q bandwidth | with R&S®FSW-B512/-B512R option  | 512 MHz                                 |
|                    | with R&S®FSW-B1200 option        | 512 MHz                                 |
|                    | with R&S®FSW-B2001/-B800R option | 512 MHz                                 |

## R&S®FSW-B21 LO/IF connections for external mixers (not available for R&S®FSW8, R&S®FSW13)

|                  |                  |                       |
|------------------|------------------|-----------------------|
| <b>LO signal</b> |                  |                       |
| Frequency range  |                  | 7.65 GHz to 17.45 GHz |
| Level            | +20 °C to +30 °C | +15.5 dBm ± 1 dB      |
|                  | +5 °C to +40 °C  | +15.5 dBm ± 3 dB      |

|                                   |   |                      |
|-----------------------------------|---|----------------------|
| <b>IF input</b>                   |   |                      |
| IF frequency                      | set signal analysis bandwidth   |                      |
|                                   | ≤ 80 MHz, bandwidth-dependent   | 1310 MHz to 1330 MHz |
|                                   | 80 MHz to 160 MHz/320 MHz with R&S®FSW-B160/-B320   | 1530 MHz             |
|                                   | 80 MHz to 512 MHz with R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R   | 1580 MHz             |
|                                   | > 512 MHz with R&S®FSW-B1200/-B2001/-B800R  | 3290 MHz             |
|                                   | > 80 MHz with R&S®FSW-B2000   | 2000 MHz             |
|                                   | > 80 MHz with R&S®FSW-B5000   |                      |
|                                   | analysis bandwidth ≤ 4.4 GHz  | 2800 MHz             |
| analysis bandwidth > 4.4 GHz      | 3500 MHz  |                      |
| Full-scale level                  | compression < 1 dB  |                      |
|                                   | 2-port mixer (LO output/IF input, front panel) <sup>39</sup>  | -20 dBm (nom.)       |
|                                   | 3-port mixer (IF input, front panel)  | -20 dBm (nom.)       |
| Level uncertainty at IF frequency | IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel) <sup>39</sup> |                      |
|                                   | +20 °C to +30 °C  | < 1 dB               |
|                                   | +5 °C to +40 °C   | < 3 dB               |
|                                   | IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel)                         |                      |
|                                   | +20 °C to +30 °C  | < 1 dB               |
| +5 °C to +40 °C                   | < 3 dB  |                      |

|                           |  |                  |
|---------------------------|--|------------------|
| <b>Inputs and outputs</b> |  |                  |
| LO output/IF input        |  | SMA female, 50 Ω |
| IF input                  |  | SMA female, 50 Ω |

<sup>39</sup> 2-port mixers are not supported by the R&S®FSW-B800R/-B1200/-B2000/-B2001/-B5000 options.

## R&S®FSW-B24 RF preamplifier

| Frequency       |           |                     |
|-----------------|-----------|---------------------|
| Frequency range | R&S®FSW8  | 100 kHz to 8 GHz    |
|                 | R&S®FSW13 | 100 kHz to 13.6 GHz |
|                 | R&S®FSW26 | 100 kHz to 26.5 GHz |
|                 | R&S®FSW43 | 100 kHz to 43.5 GHz |
|                 | R&S®FSW50 | 100 kHz to 50 GHz   |
|                 | R&S®FSW67 | 100 kHz to 67 GHz   |

| Setting range        |   |                                 |
|----------------------|---|---------------------------------|
| RF preamplifier gain | R&S®FSW8, R&S®FSW13                           | 15 dB/30 dB (nom.) (selectable) |
|                      | R&S®FSW26, R&S®FSW43,<br>R&S®FSW50, R&S®FSW67 | 30 dB (nom.)                    |

| Other specifications          |  |                             |
|-------------------------------|--|-----------------------------|
| Level measurement uncertainty |  | see base unit specification |
| Displayed average noise level |  |                             |
| Intermodulation               |  |                             |
| Measurement uncertainty       |  |                             |

## R&S®FSW-B25 electronic attenuator

| Frequency       |                      |                    |
|-----------------|----------------------|--------------------|
| Frequency range | R&S®FSW8             | 10 MHz to 8 GHz    |
|                 | R&S®FSW13, R&S®FSW26 | 10 MHz to 13.6 GHz |

| Setting range |  |  |
|---------------|--|--|
|               |  | 0 dB to 30 dB, in 1 dB steps <sup>40</sup> |

| Level measurement uncertainty |  |                             |
|-------------------------------|--|-----------------------------|
|                               |  | see base unit specification |

| Displayed average noise level |                          |   |
|-------------------------------|--------------------------|---|
|                               | electronic attenuator on | specification of base unit degrades by<br>3 dB + 0.25 dB × f / 1 GHz (nom.) |

| Intermodulation                   |   |                             |
|-----------------------------------|---|-----------------------------|
| Third-order intercept point (TOI) | electronic attenuator off or<br>electronic attenuator on and<br>RF attenuation = 0 dB | see base unit specification |
|                                   | electronic attenuator on, RF attenuation = 30 dB                                      |                             |
|                                   | 10 MHz to 500 MHz   | 30 dBm (nom.)               |
|                                   | 500 MHz to 13.6 GHz   | 40 dBm (nom.)               |

<sup>40</sup> Electronic RF attenuator: 5 dB steps.  
Electronic IF attenuator: 1 dB steps.

## R&S®FSW-B71 analog baseband inputs, R&S®FSW-B71E 80 MHz analysis bandwidth for analog baseband inputs

| Frequency                   |                |                    |
|-----------------------------|----------------|--------------------|
| Frequency range (equalized) | R&S®FSW-B71    |                    |
|                             | I only, Q only | DC to 40 MHz       |
|                             | I + jQ         | -40 MHz to +40 MHz |
|                             | R&S®FSW-B71E   |                    |
|                             | I only, Q only | DC to 80 MHz       |
|                             | I + jQ         | -80 MHz to +80 MHz |

| Spectral purity |                  |                        |
|-----------------|------------------|------------------------|
| Phase noise     | offset 1 kHz     | -134 dBc (1 Hz) (nom.) |
|                 | offset 10 kHz    | -138 dBc (1 Hz) (nom.) |
|                 | offset ≥ 100 kHz | -144 dBc (1 Hz) (nom.) |

| Inputs                           |   |                             |
|----------------------------------|---|-----------------------------|
| Connectors                       | I and Q                                 | BNC female, 50 Ω (nom.)     |
|                                  | T and $\bar{Q}$ <sup>41</sup>           | BNC female, 50 Ω (nom.)     |
| Maximum safe input voltage       | any input, sum of DC + AC               | ±4 V                        |
| Input voltage range (full scale) | peak voltage                            | ±2 V, ±1 V, ±0.5 V, ±0.25 V |
| Max. common mode input range     |   | -3 V to +3 V                |
| Input impedance                  | single-ended                            | 50 Ω (nom.)                 |
|                                  | differential                            | 100 Ω (nom.)                |
|                                  | common mode at DC                       | 20 kΩ (nom.)                |
| Input return loss                | 0 Hz to 40 MHz                          | -35 dB (nom.)               |
|                                  | 40 MHz to 80 MHz<br>(R&S®FSW-B71E only) | -30 dB (nom.)               |

| Amplitude                     |   |                |
|-------------------------------|---|----------------|
| Absolute amplitude accuracy   | $f_{\text{input}} = 1 \text{ MHz}$ ,<br>input voltage = full scale - 6 dB | ±0.15 dB       |
| Amplitude linearity           | 0 dB to -80 dB relative to full scale                                     | ±0.1 dB (nom.) |
| Frequency response            |   |                |
| Amplitude                     | relative to 1 MHz   |                |
|                               | 0 Hz to 40 MHz  | ±0.15 dB       |
|                               | 40 MHz to 80 MHz<br>(R&S®FSW-B71E only)                                   | ±0.25 dB       |
| Deviation from linear phase   | 0 Hz to 40 MHz  | ±1° (nom.)     |
|                               | 40 MHz to 80 MHz<br>(R&S®FSW-B71E only)                                   | ±2° (nom.)     |
| Channel match (I/Q imbalance) |   |                |
| Amplitude match accuracy      | 0 Hz to 20 MHz  | ±0.06 dB (2σ)  |
|                               | 20 MHz to 40 MHz  | ±0.1 dB (2σ)   |
|                               | 40 MHz to 80 MHz<br>(R&S®FSW-B71E only)                                   | ±0.15 dB (2σ)  |
|                               |   |                |
| Phase match accuracy          | 0 Hz to 20 MHz  | ±0.3° (nom.)   |
|                               | 20 MHz to 40 MHz  | ±0.6° (nom.)   |
|                               | 40 MHz to 80 MHz<br>(R&S®FSW-B71E only)                                   | ±1° (nom.)     |

| Dynamic range                       |   |  |
|-------------------------------------|---|--|
| Crosstalk                           |   | -80 dB (nom.)  |
| Signal-to-noise ratio               | any input range, relative to full scale | 145 dBc (1 Hz) (nom.)                                    |
| Displayed average noise level (RMS) | 2 MHz to 80 MHz<br>range                |  |
|                                     | ±2 V peak                               | -130 dBm (1 Hz) (72 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
|                                     | ±1 V peak                               | -136 dBm (1 Hz) (36 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
|                                     | ±0.5 V peak                             | -142 dBm (1 Hz) (18 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.) |
|                                     | ±0.25 V peak                            | -148 dBm (1 Hz) (9 nV ( $\sqrt{1 \text{ Hz}}$ )) (nom.)  |

<sup>41</sup> Not available for the R&S®FSW85.

|  |   |                |
|--|---|----------------|
| Residual DC (I/Q offset)               | relative to full scale                                    | -54 dB (nom.)  |
| Residual response                      | range $\pm 0.25$ V peak                                   | -90 dBm (nom.) |
| Spurious response                      | with full scale input signal                              |                |
|  | 0 Hz to 40 MHz  | -75 dBc (nom.) |
|  | 40 MHz to 80 MHz<br>(R&S®FSW-B71E only)                   | -70 dBc (nom.) |
| Third-order intermodulation distortion | two CW signals, voltage = full scale - 6 dB (each signal) |                |
|  | 0 Hz to 40 MHz  | -80 dBc (nom.) |
|  | 40 MHz to 80 MHz (R&S®FSW-B71E only)                      |                |
|  | differential  | -80 dBc (nom.) |
|  | single-ended  | -74 dBc (nom.) |

**Probes**

|   |   |   |
|---|---|---|
| Probes supported on connectors I and Q            | active single-ended probes                              | R&S®RT-ZS10E  |
|   |   | R&S®RT-ZS10   |
|   |   | R&S®RT-ZS20   |
|   |   | R&S®RT-ZS30   |
|   |   | R&S®RT-ZS60   |
|   | active differential probes                              | R&S®RT-ZD20   |
|   |   | R&S®RT-ZD30   |
| R&S®RT-ZD40                                       |   |   |
| <b>RF measurements using probes <sup>42</sup></b> |   |   |
| Supported connector                               | input source RF set to baseband input I                 | I   |
| Maximum input frequency                           |   | 5 GHz <sup>43</sup>   |
| Frequency response                                | see probe specification for frequency response of probe | add the probe frequency response to the R&S®FSW frequency response specified in section "Total measurement uncertainty" |

<sup>42</sup> Feature not available for R&S®FSW67 and R&S®FSW85.

<sup>43</sup> Maximum frequency supported by the connector. To identify the maximum achievable input frequency when using a probe, the probe specification must be taken into account.

## R&S®FSW-B2000 2 GHz analysis bandwidth (option available for all models except R&S®FSW8, R&S®FSW13) <sup>44</sup>

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B2000 option. "B2000" must be configured as data source in the INPUT menu. When using other input settings for I/Q data recording, i.e. in relation with the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R options, see section "I/Q data" in the base unit specification. The R&S®FSW-B2000 option uses an oscilloscope as external digitizer. An R&S®RTO1044, R&S®RTO2044 or R&S®RTO 2064 with R&S®RTO-B4 option is needed to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 option" and "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

|                                       |  |  |
|---------------------------------------|--|--|
| Frequency range                       | setting range of center frequency  |  |
|                                       | standard, dependent on instrument model  | 5.5 GHz to 26/43/50/67/86 GHz          |
|                                       | R&S®FSW85 with R&S®FSW-B90G option   | 5.5 GHz to 90 GHz                      |
| Record length <sup>45</sup>           | 2 GHz analysis bandwidth, sampling rate 2.5 GHz, R&S®RTO-1044 with R&S®RTO-B104 option   |  |
|                                       |  | max. 200 Msample I and Q <sup>46</sup> |
|                                       | 2 GHz analysis bandwidth, sampling rate 2.5 GHz, R&S®RTO-2044/2064 with R&S®RTO-B110 option  |  |
|                                       |  | max. 500 Msample I and Q <sup>46</sup> |
| Sampling rate                         | setting range  | 10 kHz to 10 GHz                       |
|                                       | default for 2 GHz analysis bandwidth   | 2.5 GHz                                |
| Signal analysis bandwidth (equalized) | dependent on sampling rate, YIG preselector off  | 8 kHz to 2 GHz                         |
| Amplitude flatness                    | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>47</sup> , +20 °C to +30 °C |  |
|                                       | analysis bandwidth ≤ 2 GHz   |  |
|                                       | 5.5 GHz ≤ $f_{center}$ < 8 GHz   | ±1.5 dB                                |
|                                       | 8 GHz ≤ $f_{center}$ < 22 GHz  | ±1.2 dB                                |
|                                       | 22 GHz ≤ $f_{center}$ ≤ 26.5 GHz   | ±1.4 dB                                |
|                                       | 26.5 GHz < $f_{center}$ ≤ 43.5 GHz   | ±1.6 dB                                |
|                                       | 43.5 GHz < $f_{center}$ ≤ 50.0 GHz   | ±1.7 dB                                |
|                                       | 50.0 GHz < $f_{center}$ ≤ 67.0 GHz <sup>48</sup>   | ±2.0 dB                                |
| 67 GHz < $f_{center}$ ≤ 85 GHz        | ±2.5 dB  |  |
| Deviation from linear phase           | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>47</sup> , +20 °C to +30 °C |  |
|                                       | analysis bandwidth ≤ 500 MHz   |  |
|                                       | 5.5 GHz ≤ $f_{center}$ < 13 GHz  | ±4° (nom.)                             |
|                                       | 13 GHz ≤ $f_{center}$ ≤ 37 GHz   | ±2° (nom.)                             |
|                                       | 37 GHz < $f_{center}$ ≤ 40 GHz   | ±4° (nom.)                             |
|                                       | 40.0 GHz < $f_{center}$ ≤ 50.0 GHz   | ±6° (nom.)                             |
|                                       | 50.0 GHz < $f_{center}$ ≤ 67.0 GHz   | ±4° (nom.)                             |
|                                       | 67 GHz < $f_{center}$ ≤ 85 GHz   | ±6° (nom.)                             |
|                                       | analysis bandwidth ≤ 1 GHz   |  |
|                                       | 5.5 GHz ≤ $f_{center}$ < 13 GHz  | ±6° (nom.)                             |
|                                       | 13 GHz ≤ $f_{center}$ ≤ 37 GHz   | ±4° (nom.)                             |
|                                       | 37 GHz < $f_{center}$ ≤ 40 GHz   | ±6° (nom.)                             |
|                                       | 40.0 GHz < $f_{center}$ ≤ 50.0 GHz   | ±8° (nom.)                             |
|                                       | 50.0 GHz < $f_{center}$ ≤ 67.0 GHz   | ±6° (nom.)                             |
| 67 GHz < $f_{center}$ ≤ 85 GHz        | ±8° (nom.)   |  |

<sup>44</sup> The R&S®FSW-B2000 option is not available in combination with the R&S®FSW-B1200/-B2001/-B800R option.

<sup>45</sup> The maximum record length with the R&S®FSW-B2000 option depends on the R&S®RTO memory configuration.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) × R&S®FSW sample rate/R&S®RTO sample rate.

This equation is valid for oscilloscopes equipped with R&S®RTO-B104 or R&S®RTO-B110 option. For other memory option configurations divide the values / 2 when using external trigger or power splitter mode on. The sample rate for the R&S®RTO can be set to 10 GHz (default) or 20 GHz.

At 2 GHz analysis bandwidth the R&S®FSW default sample rate is 2.5 GHz.

<sup>46</sup> Rounded to Msample.

<sup>47</sup> For power splitter mode on add ±0.3 dB to the amplitude flatness specification and ±2° to the deviation from linear phase values.

<sup>48</sup>  $f_{center} \leq 66.5$  GHz for analysis bandwidth 2 GHz with R&S®FSW67.

|   |  |                       |
|---|--|-----------------------|
| Deviation from linear phase (continued)           | analysis bandwidth $\leq 2$ GHz  |                       |
|   | R&S®FSW26  |                       |
|   | $f_{\text{center}} \geq 8$ GHz   | $\pm 8^\circ$ (nom.)  |
|   | R&S®FSW43 to R&S®FSW85   |                       |
|   | $5.5 \text{ GHz} \leq f_{\text{center}} < 13 \text{ GHz}$                              | $\pm 8^\circ$ (nom.)  |
|   | $13 \text{ GHz} \leq f_{\text{center}} \leq 37 \text{ GHz}$                            | $\pm 6^\circ$ (nom.)  |
|   | $37 \text{ GHz} < f_{\text{center}} \leq 40 \text{ GHz}$                               | $\pm 8^\circ$ (nom.)  |
|   | $40.0 \text{ GHz} < f_{\text{center}} \leq 50.0 \text{ GHz}$                           | $\pm 10^\circ$ (nom.) |
|   | $50.0 \text{ GHz} < f_{\text{center}} \leq 67.0 \text{ GHz}$ <sup>48</sup>             | $\pm 8^\circ$ (nom.)  |
|   | $67 \text{ GHz} < f_{\text{center}} \leq 85 \text{ GHz}$                               | $\pm 10^\circ$ (nom.) |
| Level measurement uncertainty at center frequency | add 1 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off" |                       |

## R&S®FSW-B5000 5 GHz analysis bandwidth for R&S®FSW43 and R&S®FSW85 <sup>49</sup>

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B5000 option. "B5000" must be configured as data source in the INPUT menu. When using other input settings for I/Q data recording, i.e. in relation with the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001 options, see section "I/Q data" in the base unit specification. The R&S®FSW-B5000 option uses an oscilloscope as external digitizer. An R&S®RTO 2064 with R&S®RTO-B4 option is needed to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option".

|   |  |  |
|---|--|--|
| Frequency range                                       | setting range of center frequency  |  |
|   | R&S®FSW43  |  |
|   | RF preamplifier off  | 9.5 GHz to 43 GHz                      |
|   | RF preamplifier on   | 9.5 GHz to 41 GHz                      |
|   | R&S®FSW85  |  |
|   | without R&S®FSW-B90G option  | 9.5 GHz to 85 GHz                      |
|   | with R&S®FSW-B90G option   | 9.5 GHz to 90 GHz                      |
| Record length <sup>50</sup>                           | R&S®RTO 2064 with R&S®RTO-B110 option  |  |
|   | 2 GHz analysis bandwidth, sampling rate 2.5 GHz  | max. 250 Msample I and Q <sup>46</sup> |
|   | 5 GHz analysis bandwidth, sampling rate 6.25 GHz   | max. 625 Msample I and Q <sup>46</sup> |
| Sampling rate   | setting range  |  |
|   | default for analysis bandwidth 2 GHz   | 2.5 GHz                                |
|   | default for analysis bandwidth 5 GHz   | 6.25 GHz                               |
| Signal analysis bandwidth (equalized)                 | dependent on sampling rate, YIG preselector off  | 8 kHz to 5 GHz                         |
| Amplitude flatness                                    | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>51</sup> , +20 °C to +30 °C |  |
|   | analysis bandwidth ≤ 5 GHz   |  |
|   | 9.5 GHz ≤ $f_{center}$ < 22 GHz  | ±1.2 dB                                |
|   | 22 GHz ≤ $f_{center}$ ≤ 26.5 GHz   | ±1.4 dB                                |
|   | 26.5 GHz < $f_{center}$ ≤ 43.5 GHz   | ±1.6 dB                                |
|   | 43.5 GHz < $f_{center}$ ≤ 50.0 GHz   | ±1.7 dB                                |
|   | 50.0 GHz < $f_{center}$ ≤ 67.0 GHz   | ±2.0 dB                                |
| 67 GHz < $f_{center}$ ≤ 85 GHz/87.5 GHz <sup>52</sup> | ±2.5 dB  |  |
| Deviation from linear phase                           | RF attenuation = 10/20/30/40 dB, RF preamplifier off, electronic attenuator off, YIG preselector off, power splitter mode off <sup>51</sup> , +20 °C to +30 °C |  |
|   | analysis bandwidth ≤ 500 MHz   |  |
|   | 9.5 GHz ≤ $f_{center}$ < 13 GHz  | ±4° (nom.)                             |
|   | 13 GHz ≤ $f_{center}$ ≤ 37 GHz   | ±2° (nom.)                             |
|   | 37 GHz < $f_{center}$ ≤ 40 GHz   | ±4° (nom.)                             |
|   | 40.0 GHz < $f_{center}$ ≤ 50.0 GHz   | ±6° (nom.)                             |
|   | 50.0 GHz < $f_{center}$ ≤ 67.0 GHz   | ±4° (nom.)                             |
|   | 67 GHz < $f_{center}$ ≤ 83.0 GHz   | ±6° (nom.)                             |
|   | analysis bandwidth ≤ 1 GHz   |  |
|   | 9.5 GHz ≤ $f_{center}$ < 13 GHz  | ±6° (nom.)                             |
|   | 13 GHz ≤ $f_{center}$ ≤ 37 GHz   | ±4° (nom.)                             |
|   | 37 GHz < $f_{center}$ ≤ 40 GHz   | ±6° (nom.)                             |
|   | 40.0 GHz < $f_{center}$ ≤ 50.0 GHz   | ±8° (nom.)                             |
|   | 50.0 GHz < $f_{center}$ ≤ 67.0 GHz   | ±6° (nom.)                             |
|   | 67 GHz < $f_{center}$ ≤ 83.0 GHz   | ±8° (nom.)                             |

<sup>49</sup> The R&S®FSW-B5000 option is not available in combination with the R&S®FSW-B2000 option.

<sup>50</sup> The maximum record length with the R&S®FSW-B5000 option depends on the R&S®RTO memory configuration.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) \* R&S®FSW sample rate/R&S®RTO sample rate.

This equation is valid for oscilloscopes equipped with R&S®RTO-B104 or R&S®RTO-B110 option. For other memory option configurations divide the values / 2 when using external trigger or power splitter mode on.

The sample rate for the R&S®RTO is 20 GHz. At 5 GHz analysis bandwidth the R&S®FSW default sample rate is 6.25 GHz.

<sup>51</sup> For power splitter mode on add ±0.3 dB to the amplitude flatness specification and ±5° to the deviation from linear phase values.

<sup>52</sup>  $f_{center}$  > 85 GHz requires R&S®FSW-B90G option.

|  |  |                       |
|--|--|-----------------------|
| Deviation from linear phase (continued)                      | analysis bandwidth $\leq 2$ GHz  |                       |
|  | 9.5 GHz $\leq f_{\text{center}} < 13$ GHz  | $\pm 8^\circ$ (nom.)  |
|  | 13 GHz $\leq f_{\text{center}} \leq 37$ GHz  | $\pm 6^\circ$ (nom.)  |
|  | 37 GHz $< f_{\text{center}} \leq 40$ GHz   | $\pm 8^\circ$ (nom.)  |
|  | 40.0 GHz $< f_{\text{center}} \leq 50.0$ GHz   | $\pm 10^\circ$ (nom.) |
|  | 50.0 GHz $< f_{\text{center}} \leq 67.0$ GHz   | $\pm 8^\circ$ (nom.)  |
|  | 67 GHz $< f_{\text{center}} \leq 83.0$ GHz   | $\pm 10^\circ$ (nom.) |
|  | analysis bandwidth $\leq 4.4$ GHz  |                       |
|  | 9.5 GHz $\leq f_{\text{center}} < 13$ GHz  | $\pm 10^\circ$ (nom.) |
|  | 13 GHz $\leq f_{\text{center}} \leq 37$ GHz  | $\pm 8^\circ$ (nom.)  |
|  | 37 GHz $< f_{\text{center}} \leq 40$ GHz   | $\pm 10^\circ$ (nom.) |
|  | 40.0 GHz $< f_{\text{center}} \leq 50.0$ GHz   | $\pm 12^\circ$ (nom.) |
|  | 50.0 GHz $< f_{\text{center}} \leq 67.0$ GHz   | $\pm 10^\circ$ (nom.) |
|  | 67 GHz $< f_{\text{center}} \leq 82.0$ GHz <sup>53</sup>                               | $\pm 12^\circ$ (nom.) |
|  | analysis bandwidth $\leq 5$ GHz  |                       |
| 9.5 GHz $\leq f_{\text{center}} \leq 80.0$ GHz <sup>53</sup> | add $\pm 3^\circ$ (nom.) to the values for analysis bandwidth $\leq 4.4$ GHz           |                       |
| Level measurement uncertainty at center frequency            | add 1 dB (nom.) to the values in "Total measurement uncertainty – YIG preselector off" |                       |

<sup>53</sup> Phase alignment is performed up to  $f = 83$  GHz.

## R&S®FSW-B2071 oscilloscope baseband inputs (available for all R&S®FSW models)

The specifications in this section apply to I/Q data recorded using the R&S®FSW-B2071 option. An R&S®RTO1044, R&S®RTO2044 or R&S®RTO 2064 with R&S®RTO-B4 option is needed to obtain the specified performance. For ordering information, see "Oscilloscopes supported by R&S®FSW-B2000/-B2071 option" and "Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option"

|                             |   |                                |
|-----------------------------|---|--------------------------------|
| Frequency range             | dependent on R&S®RTO model  |                                |
|                             | R&S®RTO 1044/2044   |                                |
|                             | I + jQ  | –4 GHz to +4 GHz               |
|                             | I only  | DC to 4 GHz                    |
|                             | R&S®RTO 2064  |                                |
|                             | I + jQ  | –6 GHz to +6 GHz               |
| Record length <sup>54</sup> | sampling rate 2.5 GHz, R&S®RTO 1044 with R&S®RTO-B104 option      |                                |
|                             | I + jQ, differential  | max. 100 Msample <sup>55</sup> |
|                             | I + jQ, single ended  | max. 200 Msample <sup>55</sup> |
|                             | I only  | max. 200 Msample <sup>55</sup> |
|                             | sampling rate 2.5 GHz, R&S®RTO 2044/2064 with R&S®RTO-B110 option |                                |
|                             | I + jQ, differential  | max. 250 Msample <sup>55</sup> |
|                             | I + jQ, single ended  | max. 500 Msample <sup>55</sup> |
|                             | I only  | max. 500 Msample <sup>55</sup> |
| Sampling rate               | setting range   | 10 kHz to 20 GHz               |
|                             | default for 2 GHz analysis bandwidth                              | 2.5 GHz                        |
| Signal analysis bandwidth   | dependent on R&S®RTO model and IQ mode                            |                                |
|                             | R&S®RTO 1044/2044   | 8 kHz to 8 GHz                 |
|                             | R&S®RTO 2064  | 8 kHz to 12 GHz                |
| Amplitude                   | see datasheet R&S®RTO   |                                |
| Dynamic range               | see datasheet R&S®RTO   |                                |

<sup>54</sup> The maximum record length with the R&S®FSW-B2071 option depends on the R&S®RTO memory configuration and the number of active R&S®RTO channels.

The following equation indicates the relation between record length, R&S®RTO memory size and set R&S®FSW sampling rate for 1 active channel:

Record length (rounded to Msample) = (R&S®RTO memory size per channel in Msample) × R&S®FSW sample rate/R&S®RTO sample rate.

Divide the value by half with R&S®RTO-B104 or R&S®RTO-B110 for differential mode. For other memory option configurations divide the value by half when using differential mode or I/Q single ended mode.

The sample rate for the R&S®RTO will be set to 10 GHz in differential mode and 20 GHz for all other modes.

At 2 GHz analysis bandwidth the R&S®FSW default sample rate is 2.5 GHz.

<sup>55</sup> Rounded to Msample.

## Ordering information

| Designation  | Type      | Order No.    |
|--|-----------|--------------|
| Signal and Spectrum Analyzer, 2 Hz to 8 GHz  | R&S®FSW8  | 1331.5003.08 |
| Signal and Spectrum Analyzer, 2 Hz to 13.6 GHz   | R&S®FSW13 | 1331.5003.13 |
| Signal and Spectrum Analyzer, 2 Hz to 26.5 GHz   | R&S®FSW26 | 1331.5003.26 |
| Signal and Spectrum Analyzer, 2 Hz to 43.5 GHz   | R&S®FSW43 | 1331.5003.43 |
| Signal and Spectrum Analyzer, 2 Hz to 50 GHz   | R&S®FSW50 | 1331.5003.50 |
| Signal and Spectrum Analyzer, 2 Hz to 67 GHz   | R&S®FSW67 | 1331.5003.67 |
| Signal and Spectrum Analyzer, 2 Hz to 85 GHz <sup>56</sup>   | R&S®FSW85 | 1331.5003.85 |
| <b>Accessories supplied</b>  |           |              |
| Power cable, quick start guide   |           |              |
| R&S®FSW26: adapter 3.5 mm (APC3.5-compatible) female/female  |           |              |
| R&S®FSW43: adapter 2.92 mm female/female   |           |              |
| R&S®FSW50 and R&S®FSW67: adapter 1.85 mm female/female   |           |              |
| R&S®FSW85: adapter 1.0 mm female/female, torque wrench for 1.0 mm connectors with 0.23 Nm coupling torque<br>adapter 1.85 mm female/female |           |              |

## Options for R&S®FSW with order no. 1331.5003.xx

| Designation                                    | Type        | Order No.    | Retro-fittable | Remarks  |
|--|-------------|--------------|----------------|--|
| OCXO Precision Frequency Reference             | R&S®FSW-B4  | 1313.0703.02 | yes            | user-retrofittable   |
| Resolution Bandwidth > 10 MHz                  | R&S®FSW-B8  | 1313.2464.26 | yes            | for R&S®FSW8/13/26;<br>the signal analysis bandwidth is defined by the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R/-B5000 options, not by the R&S®FSW-B8 option;<br>contact service center                                 |
| Resolution Bandwidth > 10 MHz                  | R&S®FSW-B8  | 1313.2464.02 | yes            | for R&S®FSW43/50/67/85;<br>the signal analysis bandwidth is defined by the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B5000/-B800R options, not by the R&S®FSW-B8 option;<br>contact service center;<br>export license required |
| External Generator Control                     | R&S®FSW-B10 | 1313.1622.02 | yes            | contact service center   |
| Highpass Filter for Harmonic Measurements      | R&S®FSW-B13 | 1313.0761.02 | yes            | user-retrofittable   |
| Digital Baseband Interface                     | R&S®FSW-B17 | 1313.0784.02 | yes            | user-retrofittable   |
| Spare Solid State Drive (removable hard drive) | R&S®FSW-B18 | 1313.0790.10 | yes            | user-retrofittable   |
| LO/IF Connections for external mixers          | R&S®FSW-B21 | 1313.1100.28 | yes            | for R&S®FSW26/43/50/67;<br>contact service center  |
| LO/IF Connections for external mixers          | R&S®FSW-B21 | 1313.1100.86 | yes            | for R&S®FSW85;<br>contact service center   |
| RF Preamp, 100 kHz to 13.6 GHz                 | R&S®FSW-B24 | 1313.0832.13 | yes            | for R&S®FSW8/13;<br>contact service center   |
| RF Preamp, 100 kHz to 26.5 GHz                 | R&S®FSW-B24 | 1313.0832.26 | yes            | for R&S®FSW26;<br>contact service center   |
| RF Preamp, 100 kHz to 43.5 GHz                 | R&S®FSW-B24 | 1313.0832.43 | yes            | for R&S®FSW43;<br>no export license required;<br>contact service center  |
| RF Preamp, 100 kHz to 50 GHz                   | R&S®FSW-B24 | 1313.0832.49 | yes            | for R&S®FSW50;<br>no export license required;<br>contact service center  |
| RF Preamp, 100 kHz to 50 GHz                   | R&S®FSW-B24 | 1313.0832.51 | yes            | for R&S®FSW50;<br>export license required;<br>contact service center   |

<sup>56</sup> Frequency range for R&S®FSW85 with R&S®FSW-B90G option: 2 Hz to 90 GHz (YIG preselector off).

| Designation   | Type          | Order No.                      | Retro-fittable | Remarks   |
|---|---------------|--------------------------------|----------------|---|
| RF Preamplicifier, 100 kHz to 67 GHz                    | R&S®FSW-B24   | 1313.0832.66                   | yes            | for R&S®FSW67;<br>no export license required;<br>contact service center   |
| RF Preamplicifier, 100 kHz to 67 GHz                    | R&S®FSW-B24   | 1313.0832.67                   | yes            | for R&S®FSW67;<br>export license required;<br>contact service center  |
| Electronic Attenuator, 1 dB steps                       | R&S®FSW-B25   | 1313.0990.02                   | yes            | for R&S®FSW8/13/26;<br>contact service center   |
| USB Mass Memory Write Protection                        | R&S®FSW-B33   | 1313.3602.02                   | no             | pre-installed in factory  |
| 28 MHz Analysis Bandwidth                               | R&S®FSW-B28   | 1313.1645.02                   | yes            | user-retrofittable  |
| 40 MHz Analysis Bandwidth                               | R&S®FSW-B40   | 1313.0861.02                   | yes            | user-retrofittable  |
| 80 MHz Analysis Bandwidth                               | R&S®FSW-B80   | 1313.0878.02                   | yes            | user-retrofittable  |
| 160 MHz Analysis Bandwidth                              | R&S®FSW-B160  | 1325.4850.14                   | yes            | contact service center  |
| 320 MHz Analysis Bandwidth                              | R&S®FSW-B320  | 1325.4867.14                   | yes            | includes 200 MHz IF filter;<br>contact service center   |
| 512 MHz Analysis Bandwidth                              | R&S®FSW-B512  | 1331.7106.14                   | yes            | includes 200 MHz IF filter;<br>contact service center   |
| 1200 MHz Analysis Bandwidth                             | R&S®FSW-B1200 | 1331.6400.14                   | yes            | for R&S®FSW26/43/50/67/85 ex-factory;<br>for later upgrade of R&S®FSW instruments<br>use R&S®FSW-U1200;<br>not available in combination with<br>R&S®FSW-B2000; contact service center |
| 2000 MHz Analysis Bandwidth                             | R&S®FSW-B2001 | 1331.6916.14                   | yes            | for R&S®FSW26/43/50/67/85 ex-factory;<br>for later upgrade of R&S®FSW instruments<br>use R&S®FSW-U2001;<br>not available in combination with<br>R&S®FSW-B2000; contact service center |
| 2 GHz Analysis Bandwidth                                | R&S®FSW-B2000 | 1325.4750.02                   | yes            | for R&S®FSW26/43/50/67/85;<br>not available in combination with<br>R&S®FSW-B1200/-B2001/-B800R/-B5000;<br>uses RTO oscilloscope as digitizer;<br>contact service center               |
| 5 GHz Analysis Bandwidth                                | R&S®FSW-B5000 | 1331.6997.43 /<br>1331.6997.85 | yes            | for R&S®FSW43/85 only;<br>not available in combination with<br>R&S®FSW-B2000;<br>uses RTO oscilloscope as digitizer;<br>contact service center  |
| Analog Baseband Inputs,<br>40 MHz Analysis Bandwidth    | R&S®FSW-B71   | 1313.1651.13                   | yes            | for R&S®FSW8/13;<br>contact service center  |
| Analog Baseband Inputs,<br>40 MHz Analysis Bandwidth    | R&S®FSW-B71   | 1313.1651.26                   | yes            | for R&S®FSW26/43/50;<br>contact service center  |
| Analog Baseband Inputs,<br>40 MHz Analysis Bandwidth    | R&S®FSW-B71   | 1313.1651.67                   | yes            | for R&S®FSW67;<br>contact service center  |
| Analog Baseband Inputs,<br>40 MHz Analysis Bandwidth    | R&S®FSW-B71   | 1313.1651.86                   | yes            | for R&S®FSW85;<br>contact service center  |
| 80 MHz Analysis Bandwidth for<br>Analog Baseband Inputs | R&S®FSW-B71E  | 1313.6547.02                   | yes            | R&S®FSW-B71 required;<br>user-retrofittable   |
| Oscilloscope Baseband Inputs                            | R&S®FSW-B2071 | 1331.8302.02                   | yes            | user-retrofittable  |
| Real-Time Spectrum Analyzer<br>512 MHz, POI ≤ 15 μs     | R&S®FSW-B512R | 1331.7106.16                   | yes            | contact service center<br>includes 512 MHz analysis bandwidth and<br>200 MHz IF filter; export license required   |
| Real-Time Spectrum Analyzer<br>800 MHz, POI ≤ 15 μs     | R&S®FSW-B800R | 1331.6400.16                   | yes            | contact service center<br>includes 2000 MHz analysis bandwidth;<br>not available in combination with<br>R&S®FSW-B2000; export license required  |
| Frequency Extension 90 GHz                              | R&S®FSW-B90G  | 1331.7693.02                   | no             | for R&S®FSW85 only;<br>without preselection for f > 85 GHz  |
| I/Q Memory Extension 6 GB                               | R&S®FSW-B106  | 1331.6451.02                   | yes            | R&S®FSW-B160/-U160/-B320 required;<br>user retrofittable  |
| DIG IQ 40G Streaming Out Interface                      | R&S®FSW-B517  | 1331.6980.02                   | yes            | R&S®FSW-B512/-U512/-B1200/-U1200/<br>-B2001/-U2001/-B800R required;<br>user retrofittable   |

## Firmware

| Designation  | Type           | Order No.    | Retro-fittable | Remarks  |
|--|----------------|--------------|----------------|--|
| Pulse Measurements   | R&S®FSW-K6     | 1313.1322.02 |                |  |
| Time Side Lobe Measurement                                   | R&S®FSW-K6S    | 1325.3738.02 |                | R&S®FSW-K6 option required   |
| Analog Modulation Analysis for AM/FM/φM                      | R&S®FSW-K7     | 1313.1339.02 |                |  |
| GSM/EDGE/EDGE Evolution/<br>VAMOS Measurements               | R&S®FSW-K10    | 1313.1368.02 |                |  |
| VOR/ILS Measurements   | R&S®FSW-K15    | 1331.4388.02 |                | contact service center   |
| Multicarrier Group Delay Measurements                        | R&S®FSW-K17    | 1313.4150.02 |                |  |
| Amplifier Measurements                                       | R&S®FSW-K18    | 1325.2170.02 |                |  |
| Direct DPD Measurements                                      | R&S®FSW-K18D   | 1331.6845.02 |                | R&S®FSW-K18 option required  |
| Noise Power Ratio Measurements                               | R&S®FSW-K19    | 1331.8283.02 |                |  |
| Noise Figure Measurements                                    | R&S®FSW-K30    | 1313.1380.02 |                |  |
| Security Write Protection of solid state drive               | R&S®FSW-K33    | 1322.7936.02 |                |  |
| Phase Noise Measurements                                     | R&S®FSW-K40    | 1313.1397.02 |                |  |
| Spurious Measurements  | R&S®FSW-K50    | 1325.2893.02 |                |  |
| EMI Measurements   | R&S®FSW-K54    | 1313.1400.02 |                |  |
| CISPR Calibration for R&S®FSW-K54                            | R&S®FSW-K54CAL | 1331.5932.02 |                | in line with ISO 17025 and ISO 9000;<br>R&S®FSW-K54 option required  |
| Transient Measurement Application                            | R&S®FSW-K60    | 1313.7495.02 |                |  |
| Transient Hop Measurement                                    | R&S®FSW-K60H   | 1322.9916.02 |                | R&S®FSW-K60 option required  |
| Transient Chirp Measurement                                  | R&S®FSW-K60C   | 1322.9745.02 |                | R&S®FSW-K60 option required  |
| Vector Signal Analysis                                       | R&S®FSW-K70    | 1313.1416.02 |                |  |
| Multi-Modulation Analysis                                    | R&S®FSW-K70M   | 1338.4177.02 |                | R&S®FSW-K70 option required  |
| BER PRBS measurements  | R&S®FSW-K70P   | 1338.3893.02 |                | R&S®FSW-K70 option required  |
| 3GPP FDD (WCDMA) BS Measurements<br>(incl. HSDPA and HSDPA+) | R&S®FSW-K72    | 1313.1422.02 |                |  |
| 3GPP FDD (WCDMA) MS Measurements<br>(incl. HSUPA and HSUPA+) | R&S®FSW-K73    | 1313.1439.02 |                |  |
| TD-SCDMA BS Measurements                                     | R&S®FSW-K76    | 1313.1445.02 |                |  |
| TD-SCDMA UE Measurements                                     | R&S®FSW-K77    | 1313.1451.02 |                |  |
| CDMA2000® BS Measurements                                    | R&S®FSW-K82    | 1313.1468.02 |                |  |
| CDMA2000® MS Measurements                                    | R&S®FSW-K83    | 1313.1474.02 |                |  |
| 1xEV-DO BS Measurements                                      | R&S®FSW-K84    | 1313.1480.02 |                |  |
| 1xEV-DO MS Measurements                                      | R&S®FSW-K85    | 1313.1497.02 |                |  |
| WLAN 802.11a/b/g Measurements                                | R&S®FSW-K91    | 1313.1500.02 |                | To support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.                          |
| WLAN 802.11n Measurements                                    | R&S®FSW-K91N   | 1313.1516.02 |                | R&S®FSW-K91 required;<br>to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed. |
| WLAN 802.11ac Measurements                                   | R&S®FSW-K91AC  | 1313.4209.02 |                |  |
| WLAN 802.11ax Measurements                                   | R&S®FSW-K91AX  | 1331.6345.02 |                |  |
| WLAN 802.11p Measurements                                    | R&S®FSW-K91P   | 1321.5646.02 |                |  |
| WLAN 802.11ad Measurements                                   | R&S®FSW-K95    | 1313.1639.02 |                | R&S®FSW-B2001/-B2000 option required   |
| WLAN 802.11ay Measurements                                   | R&S®FSW-K97    | 1338.4902.02 |                | R&S®FSW-B2001/-B2000/-B5000 option required  |
| EUTRA/LTE FDD BS Measurements                                | R&S®FSW-K100   | 1313.1545.02 |                | to support signal analysis bandwidths > 10 MHz, one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.                          |
| EUTRA/LTE FDD UE Measurements                                | R&S®FSW-K101   | 1313.1551.02 |                |  |
| EUTRA/LTE BS MIMO Measurements                               | R&S®FSW-K102   | 1313.1568.02 |                |  |
| EUTRA/LTE UL Advanced UL Measurements                        | R&S®FSW-K103   | 1313.2478.02 |                |  |
| EUTRA/LTE TDD BS Measurements                                | R&S®FSW-K104   | 1313.1574.02 |                |  |
| EUTRA/LTE TDD Uplink Measurements                            | R&S®FSW-K105   | 1313.1580.02 |                |  |
| EUTRA/LTE NB-IoT Downlink Measurements                       | R&S®FSW-K106   | 1331.6351.02 |                |  |
| VERIZON 5GTF DL  | R&S®FSW-K118   | 1331.7370.02 |                | one of the R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.   |
| VERIZON 5GTF UL  | R&S®FSW-K119   | 1331.8060.02 |                |  |

| Designation  | Type           | Order No.    | Retro-fittable | Remarks   |
|--|----------------|--------------|----------------|---|
| 3GPP 5G-NR DL Measurements                             | R&S®FSW-K144   | 1338.3606.02 |                | one of the R&S®FSW-B160/-B320/-B512/-B512R/-B1200/-B2001/-B800R options is needed.  |
| 3GPP 5G-NR UL Measurements                             | R&S®FSW-K145   | 1338.3612.02 |                |   |
| DOCSIS 3.1 OFDM Downstream                             | R&S®FSW-K192   | 1325.4138.02 |                | one of the R&S®FSW-B320/-B512 options is needed   |
| DOCSIS 3.1 OFDMA Upstream                              | R&S®FSW-K193   | 1325.4144.02 |                |   |
| OneWeb Reverse Link Measurements                       | R&S®FSW-K201   | 1331.7387.02 |                | one of the R&S®FSW-B28/-B40/-B80/-B160/-B320/-B512// -B512R/-B1200/-B2001/-B800R options is needed.                                     |
| 160 MHz Real-Time Measurement Application, POI ≤ 15 μs | R&S®FSW-K161R  | 1338.2700.02 |                | one of the R&S®FSW-B160/-B320 options is needed; not available for R&S®FSW-B512/-B512R/-B1200/-B2001/-B800R; no export license required |
| 512 MHz Real-Time Measurement Application, POI > 15 μs | R&S®FSW-K512RE | 1338.4731.02 |                | R&S®FSW-B512 required; not available for R&S®FSW-B160/-B320/-B512R/-B1200/-B2001/-B800R; no export license required                     |
| User Defined Frequency Correction by SnP File          | R&S®FSW-K544   | 1338.2716.02 |                | corrects frequency response (amplitude and phase) of measurement setup.   |
| 800 MHz Real-Time Measurement Application, POI > 15 μs | R&S®FSW-K800RE | 1338.7801.02 |                | one of the R&S®FSW-B1200/-B2001 options is needed; not available for R&S®FSW-B160/-B320/-B512/-B512R/-B800R; no export license required |

## PC software

| Designation   | Type                       | Order No. <sup>57</sup> |
|---|----------------------------|-------------------------|
| R&S®VSE Basic Edition <sup>58, 59</sup>                                     | R&S®VSE                    | 1345.1011.06            |
| R&S®VSE Enterprise Edition <sup>60</sup>                                    | R&S®VSE Enterprise Edition | 1345.1105.06            |
| Pulse Measurement Application <sup>60, 61</sup>                             | R&S®VSE-K6                 | 1320.7516.06            |
| Analog Modulation Analysis (AM/FM/φM) <sup>60, 61</sup>                     | R&S®VSE-K7                 | 1320.7539.06            |
| GSM Measurements <sup>60, 61</sup>  | R&S®VSE-K10                | 1313.1368.06            |
| Transient Measurements <sup>60, 61</sup>                                    | R&S®VSE-K60                | 1320.7868.06            |
| Transient Chirp Measurements <sup>60, 61</sup>                              | R&S®VSE-K60C               | 1320.7874.06            |
| Transient Hop Measurements <sup>60, 61</sup>                                | R&S®VSE-K60H               | 1320.7880.06            |
| Vector Signal Analysis <sup>60, 61</sup>                                    | R&S®VSE-K70                | 1320.7522.06            |
| 3GPP FDD Measurements <sup>60, 61</sup>                                     | R&S®VSE-K72                | 1320.7580.06            |
| IEEE 802.11a/b/g Measurements <sup>60, 61</sup>                             | R&S®VSE-K91                | 1320.7597.06            |
| IEEE 802.11p Measurements <sup>60, 61</sup>                                 | R&S®VSE-K91p               | 1320.7680.06            |
| IEEE 802.11n Measurements <sup>60, 61</sup>                                 | R&S®VSE-K91n               | 1320.7600.06            |
| IEEE 802.11ac Measurements <sup>60, 61</sup>                                | R&S®VSE-K91ac              | 1320.7616.06            |
| OFDM Signal Analysis <sup>60, 61</sup>                                      | R&S®VSE-K96                | 1320.7922.06            |
| EUTRA/LTE FDD Uplink and Downlink Measurement Application <sup>60, 61</sup> | R&S®VSE-K100               | 1320.7545.06            |
| EUTRA/LTE Advanced and MIMO (downlink) <sup>60, 61, 62</sup>                | R&S®VSE-K102               | 1320.7551.06            |
| EUTRA/LTE TDD Uplink and Downlink Measurement Application <sup>60, 61</sup> | R&S®VSE-K104               | 1320.7568.06            |
| EUTRA/LTE Narrowband IoT Analysis <sup>60, 61</sup>                         | R&S®VSE-K106               | 1320.7900.06            |
| 3GPP 5G-NR Downlink and Uplink Measurement Application <sup>60, 61</sup>    | R&S®VSE-K144               | 1309.9574.06            |
| User Defined Frequency Correction by SnP file <sup>60, 61</sup>             | R&S®VSE-K544               | 1309.9580.06            |
| <b>License Dongle</b>   |                            |                         |
| License Dongle  | R&S®FSPC                   | 1310.0002.03            |
| Floating License Dongle   | R&S®FSPC-FL                | 1310.0002.04            |
| <b>Service option</b>   |                            |                         |
| R&S®VSE Software Maintenance  | R&S®VSE-SWM                | 1320.7622.81            |

<sup>57</sup> To obtain the floating license of the product R&S®FSPC-FL is needed and order number xxxx.xxxx.51 must be used instead of xxxx.xxxx.06 .

<sup>58</sup> Requires R&S®FSPC.

<sup>59</sup> Not available for R&S®FSPC-FL.

<sup>60</sup> Requires R&S®FSPC or R&S®FSPC-FL.

<sup>61</sup> Requires R&S®VSE or R&S®VSE Enterprise.

<sup>62</sup> Requires R&S®VSE-K100 or R&S®VSE-K104.

## Upgrades

| Designation   | Type          | Order No.    | Retro-fittable | Remarks  |
|---|---------------|--------------|----------------|--|
| Analysis Bandwidth Upgrade from 28 MHz to 40 MHz                              | R&S®FSW-U40   | 1313.5205.02 | yes            | user-retrofittable;<br>R&S®FSW-B28 required  |
| Analysis Bandwidth Upgrade from 40 MHz to 80 MHz                              | R&S®FSW-U80   | 1313.5211.02 | yes            | user-retrofittable;<br>R&S®FSW-B40 or<br>R&S®FSW-U40 required  |
| Analysis Bandwidth Upgrade from 80 MHz to 160 MHz                             | R&S®FSW-U160  | 1325.5357.14 | yes            | contact service center;<br>R&S®FSW-B80 or<br>R&S®FSW-U80 required  |
| Analysis Bandwidth Upgrade from 160 MHz to 320 MHz                            | R&S®FSW-U320  | 1313.7189.02 | yes            | user-retrofittable;<br>R&S®FSW-B160/-U160 required   |
| Analysis Bandwidth Upgrade from 80 MHz to 512 MHz                             | R&S®FSW-U512  | 1321.6320.24 | yes            | contact service center;<br>R&S®FSW-B80 or<br>R&S®FSW-U80 required;<br>excludes R&S®FSW-B160/-U160/-B320  |
| Analysis Bandwidth Upgrade from 80 MHz, 160 MHz, 320 MHz, 512 MHz to 1200 MHz | R&S®FSW-U1200 | 1331.7006.14 | yes            | contact service center;<br>for R&S®FSW26/43/50/67/85;<br>R&S®FSW-B80 or<br>R&S®FSW-B160/-U160 or<br>R&S®FSW-B320/-U320 or<br>R&S®FSW-B512/-U512 required.<br>Not available for instruments with<br>R&S®FSW-B512R,<br>R&S®FSW-U512R,<br>R&S®FSW-B2000,<br>R&S®FSW-U2000 |
| Analysis Bandwidth Upgrade from 1200 MHz to 2000 MHz                          | R&S®FSW-U2001 | 1331.7070.02 | yes            | R&S®FSW-B1200 or<br>R&S®FSW-U1200 required;<br>user-retrofittable  |
| Upgrade Real-Time Spectrum Analyzer 512 MHz<br>POI ≤ 15 µs                    | R&S®FSW-U512R | 1321.6320.26 | yes            | contact service center;<br>includes 512 MHz analysis<br>bandwidth;<br>R&S®FSW-B80 or<br>R&S®FSW-U80 required;<br>export license required   |
| Upgrade to 5 GHz Signal Analysis Bandwidth                                    | R&S®FSW-U5000 | 1331.7629.44 | yes            | for R&S®FSW43;<br>uses R&S®RTO oscilloscope as<br>digitizer; contact service center  |
| Upgrade to 5 GHz Signal Analysis Bandwidth                                    | R&S®FSW-U5000 | 1331.7629.86 | yes            | for R&S®FSW85;<br>uses R&S®RTO oscilloscope as<br>digitizer; contact service center  |

## Recommended extras

| Designation  | Type                      | Order No.                             |
|--|---------------------------|---------------------------------------|
| Headphones   |                           | 0708.9010.00                          |
| IEC/IEEE Bus Cable, length: 1 m  | R&S®PCK                   | 0292.2013.10                          |
| IEC/IEEE Bus Cable, length: 2 m  | R&S®PCK                   | 0292.2013.20                          |
| 19" Rack Adapter   | R&S®ZZA-KN5               | 1175.3040.00                          |
| <b>Matching pads, 50/75 Ω</b>  |                           |                                       |
| L Section, matching at both ends   | R&S®RAM                   | 0358.5414.02                          |
| Series Resistor, 25 Ω, matching at one end<br>(taken into account in instrument function RF INPUT 75 Ω)  | R&S®RAZ                   | 0358.5714.02                          |
| <b>High-power attenuators</b>  |                           |                                       |
| 100 W, 3/6/10/20/30 dB, 1 GHz  | R&S®RBU100                | 1073.8495.xx<br>(xx = 03/06/10/20/30) |
| 50 W, 3/6/10/20/30 dB, 2 GHz   | R&S®RBU50                 | 1073.8695.xx<br>(xx = 03/06/10/20/30) |
| 50 W, 20 dB, 6 GHz   | R&S®RDL50                 | 1035.1700.52                          |
| <b>RF adapters and cables</b>  |                           |                                       |
| Coaxial adapter 1.00 mm (f) - 1.00 mm (f)  |                           | 3592.8694.00                          |
| Coaxial adapter 1.00 mm (f) - 1.85 mm (f)  |                           | 3628.4734.02                          |
| Coaxial adapter 1.85 mm (f) - 1.85 mm (f)  |                           | 3588.9654.00                          |
| Coaxial semi-rigid cable 1.85 mm (m) - 1.85 mm (m),<br>length 90 mm, U shape   |                           | 1325.1251.00                          |
| Coaxial adapter 1.85 mm (f) - 2.92 mm (f)  |                           | 3628.4728.02                          |
| Coaxial adapter 2.92 mm (f) - 2.92 mm (f)  |                           | 3588.8664.00                          |
| Coaxial adapter 3.5 mm (f) - 3.5 mm (f), APC3.5-compatible   |                           | 3587.7793.00                          |
| Coaxial adapter 3.5 mm (m) - 3.5 mm (m), APC3.5-compatible   |                           | 3587.7770.00                          |
| Coaxial adapter N (f) - 3.5 mm (m), APC3.5-compatible  |                           | 3587.7806.00                          |
| Coaxial adapter N (f) - 3.5 mm (f), APC3.5-compatible  |                           | 3587.7829.00                          |
| Coaxial cable SMA (m) - SMA (m), length 1 m  |                           | 3586.9970.00                          |
| DUT positioner for R&S®FSW85   | R&S®FS-Z124               | 1338.4783.02                          |
| <b>Connectors and cables</b>   |                           |                                       |
| Probe power connector, 3-pin   |                           | 1065.9480.00                          |
| N-Type Adapter for R&S®RT-Zxx oscilloscope probes  | R&S®RT-ZA9                | 1417.0909.02                          |
| Cable for connecting digital baseband interfaces of<br>Rohde & Schwarz instruments (accessory for R&S®FSW-B17)                                     | R&S®SMU-Z6                | 1415.0201.02                          |
| Cable for connecting high speed digital baseband interfaces of<br>Rohde & Schwarz instruments (accessory for R&S®FSW-B517)                         | R&S®DIGIQ-HS              | 3641.2948.03                          |
| <b>DC blocks</b>   |                           |                                       |
| DC Block, 10 kHz to 18 GHz (N type)  | R&S®FSE-Z4                | 1084.7443.02                          |
| <b>External harmonic mixers<br/>(for R&amp;S®FSW26, R&amp;S®FSW43, R&amp;S®FSW50, R&amp;S®FSW67 and R&amp;S®FSW85 with R&amp;S®FSW-B21 option)</b> |                           |                                       |
| Harmonic Mixer, 40 GHz to 60 GHz   | RPG FS-Z60 <sup>63</sup>  | 1048.0171.02                          |
| Harmonic Mixer, 50 GHz to 75 GHz   | RPG FS-Z75 <sup>63</sup>  | 3638.2240.02                          |
| Harmonic Mixer, 60 GHz to 90 GHz   | RPG FS-Z90 <sup>63</sup>  | 3638.2270.02                          |
| Harmonic Mixer, 75 GHz to 110 GHz  | RPG FS-Z110 <sup>63</sup> | 3638.2292.02                          |
| Harmonic Mixer, 90 GHz to 140 GHz  | RPG FS-Z140 <sup>63</sup> | 3622.0708.02                          |
| Harmonic Mixer, 110 GHz to 170 GHz   | RPG FS-Z170 <sup>63</sup> | 3622.0714.02                          |
| Harmonic Mixer, 140 GHz to 220 GHz   | RPG FS-Z220 <sup>63</sup> | 3593.3250.02                          |
| Harmonic Mixer, 220 GHz to 325 GHz   | RPG FS-Z325 <sup>63</sup> | 3593.3267.02                          |
| Harmonic Mixer, 325 GHz to 500 GHz   | RPG FS-Z500 <sup>63</sup> | 3593.3273.02                          |
| <b>Waveguide to coaxial adapters</b>   |                           |                                       |
| Waveguide to coaxial adapter WR10 - 1 mm (f)   | WCA110                    | 3626.1067.02                          |
| Waveguide to coaxial adapter WR10 - 1 mm (m)   | WCA110                    | 3626.1067.03                          |
| Waveguide to coaxial adapter WR12 - 1 mm (m)   | WCA90                     | 3626.1050.03                          |
| Waveguide to coaxial adapter WR15 - 1 mm (f)   | WCA75                     | 3626.1044.02                          |
| Waveguide to coaxial adapter WR15 - 1 mm (m)   | WCA75                     | 3626.1044.03                          |
| Waveguide to coaxial adapter WR12 - 1 mm (f)   | WCA90                     | 3626.1050.02                          |
| <b>Horn antennas</b>   |                           |                                       |
| Horn antenna 110 - 170 GHz   | FH-SG-170                 | 3629.2493.02                          |
| Horn antenna 26 - 40 GHz   | FH-SG-40                  | 3629.2393.02                          |
| Horn antenna 50 - 75 GHz   | FH-SG-75                  | 3629.2458.02                          |
| Horn antenna 60 - 90 GHz   | FH-SG-90                  | 3629.2464.02                          |

<sup>63</sup> RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

| Designation   | Type       | Order No.    |
|---|------------|--------------|
| <b>Tools</b>  |            |              |
| Torque Wrench for type N connectors,<br>1.5 Nm coupling torque (for R&S®FSW8/13)                      | R&S®ZN-ZTW | 1328.8534.71 |
| Torque Wrench for 3.5/2.92/2.4/1.85 mm connectors,<br>0.9 Nm coupling torque (for R&S®FSW26/43/50/67) | R&S®ZN-ZTW | 1328.8534.35 |
| Torque Wrench for 1.0 mm connectors,<br>0.23 Nm coupling torque (for R&S®FSW85)                       | R&S®ZN-ZTW | 1328.8534.11 |

## Power sensors supported <sup>64</sup>

| Designation   | Type                      | Order No.    |
|---|---------------------------|--------------|
| <b>Universal power sensors</b>                                  |                           |              |
| 10 MHz to 8 GHz, 100 mW, 2-path                                 | R&S®NRP-Z211              | 1417.0409.02 |
| 10 MHz to 8 GHz, 200 mW   | R&S®NRP-Z11 <sup>65</sup> | 1138.3004.02 |
| 10 MHz to 18 GHz, 100 mW, 2-path                                | R&S®NRP-Z221              | 1417.0309.02 |
| 10 MHz to 18 GHz, 200 mW  | R&S®NRP-Z21 <sup>65</sup> | 1137.6000.02 |
| 10 MHz to 18 GHz, 2 W   | R&S®NRP-Z22 <sup>65</sup> | 1137.7506.02 |
| 10 MHz to 18 GHz, 15 W  | R&S®NRP-Z23 <sup>65</sup> | 1137.8002.02 |
| 10 MHz to 18 GHz, 30 W  | R&S®NRP-Z24 <sup>65</sup> | 1137.8502.02 |
| <b>Power sensor modules with power splitter</b>                 |                           |              |
| DC to 18 GHz, 500 mW  | R&S®NRP-Z27               | 1169.4102.02 |
| DC to 26.5 GHz, 500 mW  | R&S®NRP-Z37               | 1169.3206.02 |
| <b>Thermal power sensors <sup>66</sup></b>                      |                           |              |
| 0 Hz to 18 GHz, 100 mW  | R&S®NRP18T                | 1424.6115.02 |
| 0 Hz to 18 GHz, 100 mW  | R&S®NRP18TN               | 1424.6121.02 |
| 0 Hz to 33 GHz, 100 mW  | R&S®NRP33T                | 1424.6138.02 |
| 0 Hz to 33 GHz, 100 mW  | R&S®NRP33TN               | 1424.6144.02 |
| 0 Hz to 40 GHz, 100 mW  | R&S®NRP40T                | 1424.6150.02 |
| 0 Hz to 40 GHz, 100 mW  | R&S®NRP40TN               | 1424.6167.02 |
| 0 Hz to 50 GHz, 100 mW  | R&S®NRP50T                | 1424.6173.02 |
| 0 Hz to 50 GHz, 100 mW  | R&S®NRP50TN               | 1424.6180.02 |
| 0 Hz to 67 GHz, 100 mW  | R&S®NRP67T                | 1424.6196.02 |
| 0 Hz to 67 GHz, 100 mW  | R&S®NRP67TN               | 1424.6209.02 |
| 0 Hz to 110 GHz, 100 mW   | R&S®NRP110T               | 1424.6215.02 |
| <b>Thermal waveguide power sensors</b>                          |                           |              |
| 50 GHz to 75 GHz, 100 mW  | R&S®NRP75TWG              | 1700.2529.02 |
| 60 GHz to 90 GHz, 100 mW  | R&S®NRP90TWG              | 1700.2312.02 |
| 75 GHz to 110 GHz, 100 mW                                       | R&S®NRP110TWG             | 1173.8709.02 |
| <b>Average power sensors <sup>66</sup></b>                      |                           |              |
| 8 kHz to 6 GHz, 200 mW  | R&S®NRP6A                 | 1424.6796.02 |
| 8 kHz to 6 GHz, 200 mW  | R&S®NRP6AN                | 1424.6809.02 |
| 9 kHz to 6 GHz, 200 mW  | R&S®NRP-Z91 <sup>65</sup> | 1168.8004.02 |
| 8 kHz to 18 GHz, 200 mW   | R&S®NRP18A                | 1424.6815.02 |
| 8 kHz to 18 GHz, 200 mW   | R&S®NRP18AN               | 1424.6821.02 |
| <b>Three path diode power sensors <sup>66</sup></b>             |                           |              |
| 100 pW to 200 mW, 10 MHz to 8 GHz                               | R&S®NRP8S                 | 1419.0006.02 |
| 100 pW to 200 mW, 10 MHz to 8 GHz, LAN version                  | R&S®NRP8SN                | 1419.0012.02 |
| 100 pW to 200 mW, 10 MHz to 18 GHz                              | R&S®NRP18S                | 1419.0029.02 |
| 100 pW to 200 mW, 10 MHz to 18 GHz, LAN version                 | R&S®NRP18SN               | 1419.0035.02 |
| 1 nW to 2 W, 10 MHz to 18 GHz                                   | R&S®NRP18S-10             | 1424.6721.02 |
| 10 nW to 15 W, 10 MHz to 18 GHz                                 | R&S®NRP18S-20             | 1424.6738.02 |
| 30 nW to 30 W, 10 MHz to 18 GHz                                 | R&S®NRP18S-25             | 1424.6744.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz                              | R&S®NRP33S                | 1419.0064.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz, LAN version                 | R&S®NRP33SN               | 1419.0070.02 |
| 100 pW to 200 mW, 10 MHz to 33 GHz, LAN version, TVAC-compliant | R&S®NRP33SN-V             | 1419.0129.02 |
| 100 pW to 100 mW, 50 MHz to 40 GHz                              | R&S®NRP40S                | 1419.0041.02 |
| 100 pW to 100 mW, 50 MHz to 40 GHz, LAN version                 | R&S®NRP40SN               | 1419.0058.02 |
| 100 pW to 100 mW, 50 MHz to 50 GHz                              | R&S®NRP50S                | 1419.0087.02 |
| 100 pW to 100 mW, 50 MHz to 50 GHz, LAN version                 | R&S®NRP50SN               | 1419.0093.02 |
| <b>Wideband power sensors <sup>66</sup></b>                     |                           |              |
| 50 MHz to 18 GHz, 100 mW  | R&S®NRP-Z81               | 1137.9009.02 |
| 50 MHz to 40 GHz, 100 mW (2.92 mm)                              | R&S®NRP-Z85               | 1411.7501.02 |
| 50 MHz to 40 GHz, 100 mW (2.40 mm)                              | R&S®NRP-Z86               | 1417.0109.40 |
| 50 MHz to 44 GHz, 100 mW (2.40 mm)                              | R&S®NRP-Z86               | 1417.0109.44 |

<sup>64</sup> For average power measurement only.

<sup>65</sup> Product discontinued.

<sup>66</sup> In addition to RF power measurements the R&S®NRP-Z8x, R&S®NRPxxT/TN, R&S®NRPxxA/AN and R&S®NRPxxS/SN power sensors can be used as wideband RF power trigger sources.

## Probes supported by R&S®FSW-B71/-B71E option

| Designation  | Type         | Order No.    |
|--|--------------|--------------|
| 1.0 GHz, active, 1 M $\Omega$ , 0.8 pF   | R&S®RT-ZS10E | 1418.7007.02 |
| 1.0 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button   | R&S®RT-ZS10  | 1410.4080.02 |
| 1.5 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button   | R&S®RT-ZS20  | 1410.3502.02 |
| 3.0 GHz, active, 1 M $\Omega$ , 0.8 pF, micro button   | R&S®RT-ZS30  | 1410.4309.02 |
| 6.0 GHz, active, 1 M $\Omega$ , 0.3 pF, micro button   | R&S®RT-ZS60  | 1418.7307.02 |
| 1.5 GHz, active, differential, 1 M $\Omega$ , 0.6 pF, micro button   | R&S®RT-ZD20  | 1410.4409.02 |
| 3.0 GHz, active, differential, 1 M $\Omega$ , 0.6 pF, micro button   | R&S®RT-ZD30  | 1410.4609.02 |
| 4.5 GHz, active, differential, 1 M $\Omega$ , 0.4 pF, micro button   | R&S®RT-ZD40  | 1410.5205.02 |
| 1.5 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button                | R&S®RT-ZM15  | 1800.4700.02 |
| 3 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button                  | R&S®RT-ZM30  | 1419.3005.02 |
| 6 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button                  | R&S®RT-ZM60  | 1419.3105.02 |
| 9 GHz Modular Probe Amplifier, differential, 400 k $\Omega$ , multimode, incl. R&S®ProbeMeter; micro button                  | R&S®RT-ZM90  | 1419.4301.02 |
| <b>Accessories for modular probes</b>  |              |              |
| Tip Cable, solder in, extended temperature, length: 15 cm, multimode compatible  | R&S®RT-ZMA11 | 1419.4318.02 |
| Tip Cable, square pin, for 1.27 mm pin header, length: 15 cm, multimode compatible   | R&S®RT-ZMA12 | 1419.4324.02 |
| Tip Cable, quick connect, for solder in resistor connection, length: 15 cm, multimode compatible                             | R&S®RT-ZMA15 | 1419.4224.02 |
| Browser Module, variable span from 0.5 mm to 8 mm, spring-loaded, incl. spring loaded resistor tips (2 pairs)                | R&S®RT-ZMA30 | 1419.4353.02 |
| SMA Module, 2.92 mm/3.5 mm/SMA, differential, 100 $\Omega$ , DC termination, multimode compatible; incl. lead 11 cm (4.3 in) | R&S®RT-ZMA40 | 1419.4201.02 |
| Extended Temperature Kit, 1 m matched cable pair, multimode compatible, incl. R&S®RT-ZMA11                                   | R&S®RT-ZMA50 | 1419.4218.02 |

## Oscilloscopes supported by R&S®FSW-B2000/-B2071 option

| Designation  | Type                      | Order No.    |
|--|---------------------------|--------------|
| Digital Oscilloscope, 4 GHz, 20 Gsample/s, 20/80 Msample, 4 channels | R&S®RTO1044 <sup>65</sup> | 1316.1000.44 |
| OCXO 10 MHz  | R&S®RTO-B4                | 1304.8305.02 |
| Memory Upgrade, 50 Msample per channel                               | R&S®RTO-B101              | 1304.8428.02 |
| Memory Upgrade, 100 Msample per channel                              | R&S®RTO-B102              | 1304.8434.02 |
| Memory Upgrade, 200 Msample per channel                              | R&S®RTO-B103              | 1304.8440.02 |
| Memory Upgrade, 400 Msample per channel                              | R&S®RTO-B104              | 1304.8457.02 |

| Designation   | Type         | Order No.    |
|---|--------------|--------------|
| Digital Oscilloscope, 4 GHz, 20 Gsample/s, 50/200 Msample, 4 channels | R&S®RTO2044  | 1329.7002.44 |
| OCXO 10 MHz   | R&S®RTO-B4   | 1304.8305.02 |
| Memory Upgrade, 100 Msample per channel                               | R&S®RTO-B101 | 1329.7060.02 |
| Memory Upgrade, 200 Msample per channel                               | R&S®RTO-B102 | 1329.7077.02 |
| Memory Upgrade, 400 Msample per channel                               | R&S®RTO-B104 | 1329.7083.02 |
| Memory Upgrade, 1 Gsample per channel                                 | R&S®RTO-B110 | 1329.7090.04 |

## Oscilloscopes supported by R&S®FSW-B2000/-B2071 and R&S®FSW-B5000 option

| Designation   | Type         | Order No.    |
|---|--------------|--------------|
| Digital Oscilloscope, 6 GHz, 20 Gsample/s, 50/200 Msample, 4 channels | R&S®RTO2064  | 1329.7002.64 |
| OCXO 10 MHz   | R&S®RTO-B4   | 1304.8305.02 |
| Memory Upgrade, 100 Msample per channel                               | R&S®RTO-B101 | 1329.7060.02 |
| Memory Upgrade, 200 Msample per channel                               | R&S®RTO-B102 | 1329.7077.02 |
| Memory Upgrade, 400 Msample per channel                               | R&S®RTO-B104 | 1329.7083.02 |
| Memory Upgrade, 1 Gsample per channel                                 | R&S®RTO-B110 | 1329.7090.04 |

## Service options

| Service options  |         |   |
|--|---------|---|
| Extended Warranty, one year                            | R&S®WE1 | Please contact your local Rohde & Schwarz sales office. |
| Extended Warranty, two years                           | R&S®WE2 |   |
| Extended Warranty with Calibration Coverage, one year  | R&S®CW1 |   |
| Extended Warranty with Calibration Coverage, two years | R&S®CW2 |   |

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>67</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>67</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.

CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

WiMAX Forum is a registered trademark of the WiMAX Forum. WiMAX, the WiMAX Forum logo, WiMAX Forum Certified, and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

---

<sup>67</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners  
PD 5215.6749.22 | Version 03.01 | February 2019 (as)  
R&S®FSW Signal and Spectrum Analyzer  
Data without tolerance limits is not binding | Subject to change  
© 2019 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



5215674922