


Model 15S1G6
M1 through M3
15 Watts CW
0.7GHz–6GHz



The Model 15S1G6 is a solid-state, Class A design, self-contained, air-cooled, broadband amplifier designed for applications where instantaneous bandwidth and high gain are required. Housed in a stylish contemporary cabinet, the unit is designed for benchtop use, but can be removed from the cabinet for immediate equipment rack mounting. The 15S1G6, when used with a sweep generator, will provide a minimum of 15 watts of RF power. Included is a front panel gain control which permits the operator to conveniently set the desired

output level. The 15S1G6 is protected from RF input overdrive by an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF amplifier stages are protected from over-temperature by removing the DC voltage to them if an over temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions when an over-temperature or power supply fault has occurred. The unit can be returned to operate when the

Typical Output Power 15S1G6

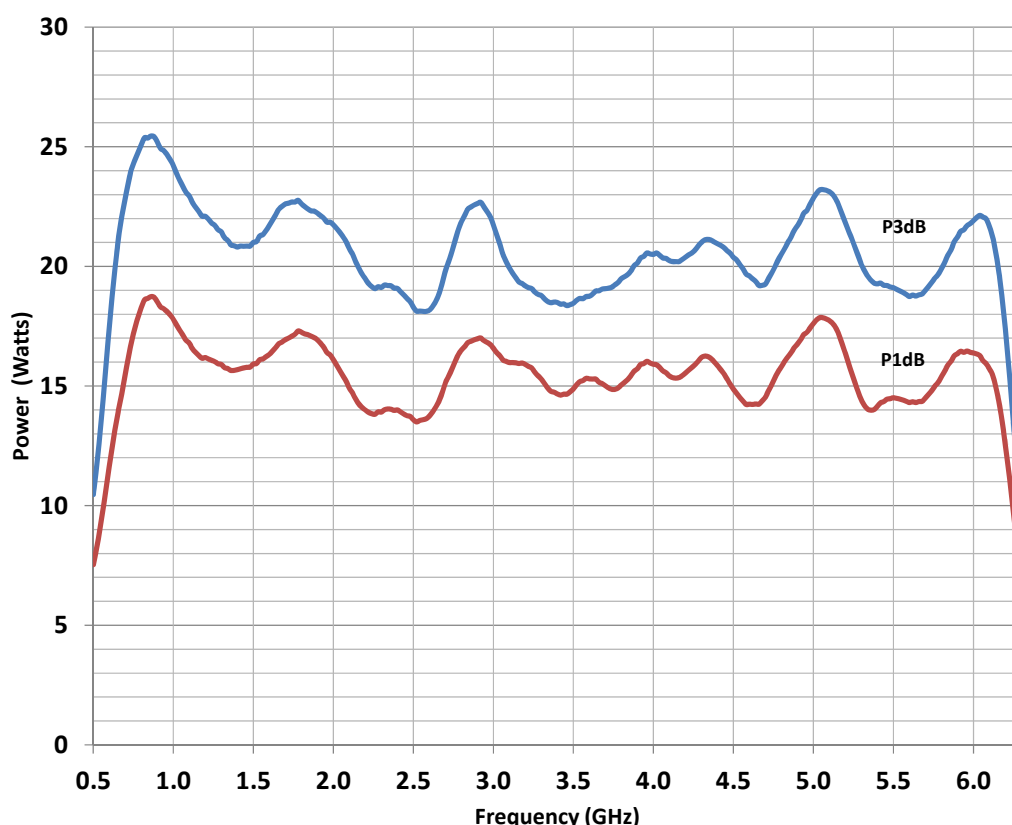

The 15S1G6 includes digital control for both local and remote control of the amplifier. All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 format, RS-232 hardwire and fiber optic, USB, and Ethernet. The bus interface connector is located on the back panel and positive control of local or remote operation is assured by a Local/Remote switch on the front panel of the amplifier.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

SPECIFICATIONS, MODEL 15S1G6

RATED POWER OUTPUT	15 watts minimum (0.7-6 GHz)
POWER OUTPUT @ 3dB COMPRESSION	
Nominal	20 watts
Minimum	15 watts
POWER OUTPUT @ 1dB COMPRESSION	
Nominal	15 watts
Minimum	12 watts
SMALL SIGNAL GAIN FLATNESS	±1.5 dB typical ±2.0 dB maximum
FREQUENCY RESPONSE	0.7–6GHz instantaneously
INPUT FOR RATED OUTPUT	1.0 milliwatt maximum
GAIN (at maximum setting)	43 dB minimum
GAIN ADJUSTMENT (Continuous Range)	10 dB minimum (4096 steps remote)
INPUT IMPEDANCE.....	50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE	50 ohms, nominal
MISMATCH TOLERANCE *	100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. * See Application Note #27
MODULATION CAPABILITY	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
HARMONIC DISTORTION	Minus 20 dBc maximum at 15 watts, (1.0–6.0 GHz) Minus 15 dBc typical at 15 watts (0.7-1.0 GHz)
SPURIOUS	Minus 73 dBc typical
THIRD ORDER INTERCEPT POINT	48 dBm typical
NOISE FIGURE	10 dB typical
PRIMARY POWER (selected automatically).....	90-132, 180-264 VAC 50/60 Hz, single phase 210 watts maximum
CONNECTORS	
RF.....	Type N female
REMOTE INTERFACES	
IEEE-488.....	24 pin female
RS-232	9 pin Subminiature D (female)
RS-232 (fiber optic)	Type ST
USB 2.0	Type B
Ethernet	RJ-45
SAFETY INTERLOCK	15 Pin Subminiature D
COOLING.....	Forced air (self contained fans)
EXPORT CLASSIFICATION	EAR99

OPTIONAL CONFIGURATIONS				
MODEL	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
15S1G6	Type N female on front panel	Type N female on front panel	15.9 kg (35 lbs)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
15S1G6M1	Type N female on rear panel	Type N female on rear panel	15.9 kg (35 lbs)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
15S1G6M2	Same as 15S1G6 with enclosure removed for rack mounting		10.2 kg (22.5 lbs)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in
15S1G6M3	Same as 15S1G6M1 with enclosure removed for rack mounting		10.2 kg (22.5 lbs)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in