

Cell MasterTM MT8212B

Cable, Antenna and Base Station Analyzer



From the Industry Leader in Handheld Field Application Instrumentation – a Multi-Function Base Station Analyzer

The Cell Master from Anritsu is a single instrument that combines all of the tools required to simplify the job of maintaining and troubleshooting base stations.



Easy-to-Use

In a single, lightweight, handheld, battery-operated package, the Cell Master combines the functionality of a cable and antenna analyzer, spectrum analyzer, AM/FM demodulator, power meter, channel scanner, transmitter analyzer (GSM, CDMA and 1xEV-DO), transmission analyzer for 2-port devices (built-in RF source), interference analyzer, GPS receiver and T1/E1 analyzer.

This optimal combination of network test capabilities eases the job of a network technician by eliminating the need for several independent test instruments, reducing the number of tools the technician must carry and learn to operate. The Cell Master is a low-cost, easy-to-use, and rugged solution designed specifically for field based network technicians and engineers.

Rugged and Reliable


The Anritsu Handheld MT8212B is specifically designed for field environments and can easily withstand the day-to-day punishment of field use. The analyzer is almost impervious to the bumps and bangs typically encountered by portable field-based equipment. The battery can be changed in seconds when necessary to help extend measurement time in the field.

Transflective Color Display

The standard transflective color display is viewable in direct sunlight and at wide viewing angles.


Multilingual

The MT8212B multi-language user interface features on-screen menus and messages in six different languages: English, Chinese, Japanese, French, German, and Spanish.

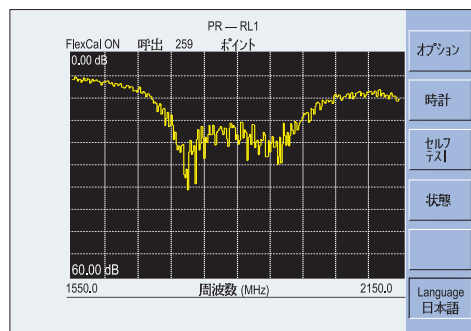

Local languages included

The Cell Master is the only instrument you need for complete base station maintenance and trouble-shooting.

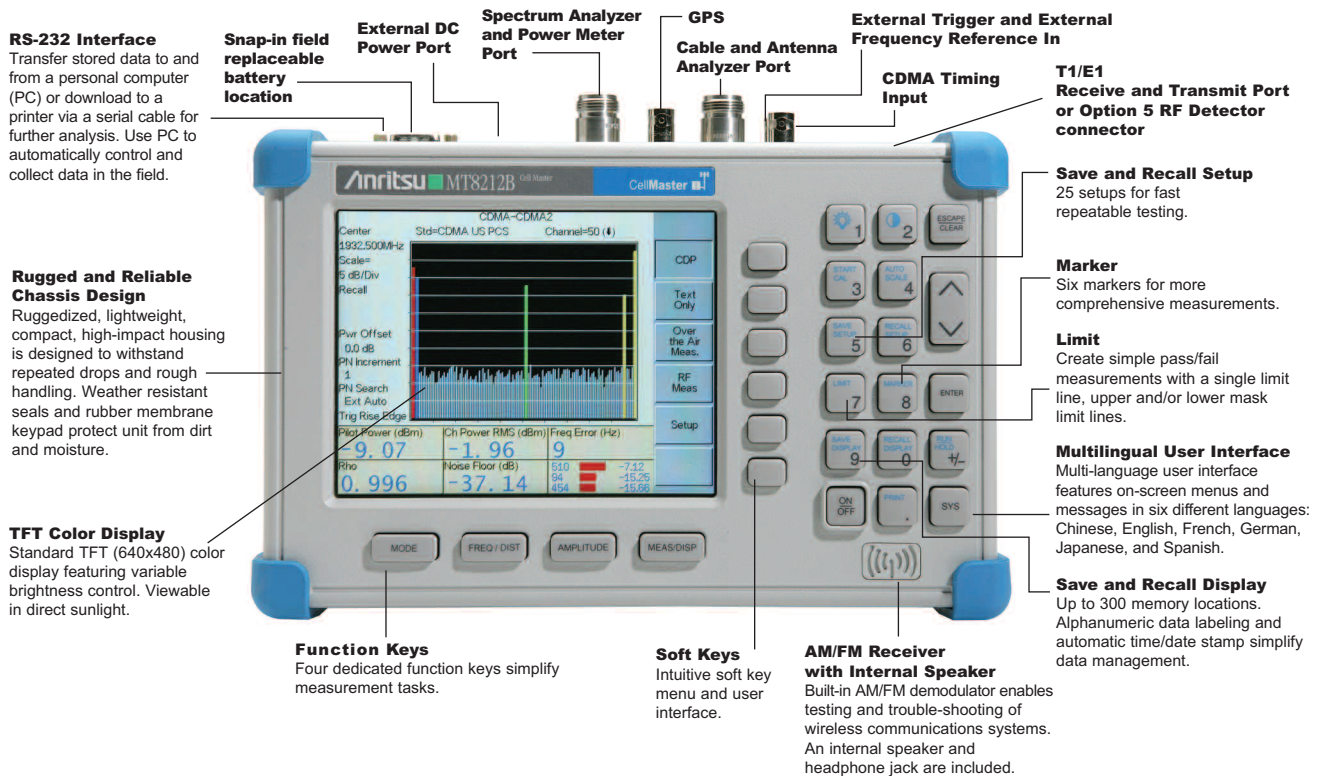

Function	Benefits
Cable and Antenna Analyzer	Quickly finds small, hard to identify faults before major failures occur.
Spectrum Analyzer	Easily locate, identify and record various signals with incredible accuracy.
Power Meter	Performs accurate power measurements, reducing holes and interference.
High Accuracy Power Meter	Perform accurate RMS power measurements for both CW and modulated signals.
Channel Scanner	Measures frequency, bandwidth and power of multiple transmitted signals.
Transmission Measurement	Built-in signal source to measure gain or loss of two port devices, as well as tower mounted amplifier antenna isolation measurements and repeater testing.
Interference Analyzer	Identify and locate interfering signals that cause dropped calls and coverage problems. Intermittent problems can be identified using spectrograms.
GPS Receiver	Built-in receiver for location information. In CDMA mode, the GPS clock can be used to make Over The Air measurements.
cdmaOne, CDMA2000 1xRTT, and CDMA2000 1xEV-DO measurements	RF measurements, demodulation and over the air measurements help the technician to quickly check base station performance.
GSM Measurements	RF measurements monitor transmitter performance.
T1 and E1 Analyzer	Simplifies the task of determining if the source of problems is on the wireline or the wireless side.
Variable Bias Tee	Eliminates the need for an external power supply when biasing tower mounted amplifier.

Cable and Antenna Analysis – Increase System Uptime

The Cell Master cable and antenna analyzer uses Frequency Domain Reflectometry (FDR) to help technicians and wireless field engineers detect cable, feedline and antenna system problems before they become costly, time-consuming system failures. Superior immunity to ambient RF levels, and excellent directivity and source match ensure accurate and repeatable measurements.


FDR Technique

Frequency Domain Reflectometry (FDR) and Time Domain Reflectometry (TDR) have similar acronyms, and both techniques are used to test transmission lines. But, that's where the similarities end. TDRs are not sensitive to RF problems: the TDR stimulus is a DC pulse, not RF. Thus, TDRs are unable to detect system faults that often lead to system failures. Additionally, FDR techniques save costly, time-consuming trouble shooting efforts by testing cable feedline and antenna systems at their proper operating frequency.

Deficient connectors, lightning arrestors, cables, jumpers or antennas are replaced before call quality is compromised.


Quick, Simple Measurements

Cell Master performs various RF measurements aimed at simplifying cable feedline and antenna system analysis: Return Loss, SWR, Cable Loss and Distance-to-Fault (DTF). A single softkey selection on the main menu activates the desired measurement mode.

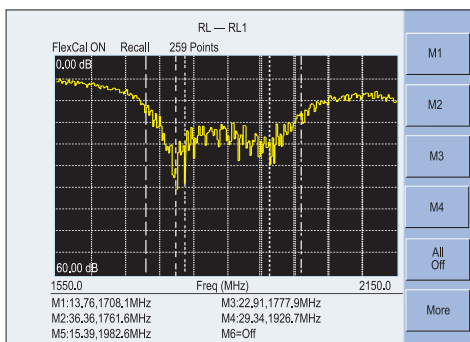

Return Loss, SWR


Return Loss measures the signal energy that is “reflected” or returned back to where it came from. VSWR (Voltage Standing Wave Ratio) is another method to measure the reflections. Return Loss and SWR “system” measurements ensure conformance to system performance engineering specifications. Measurements can easily be toggled between the two modes and can be performed without climbing the tower.

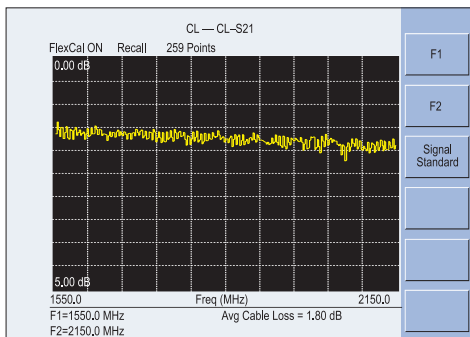

Cable Loss

Cable Loss measures the RF energy that is lost as heat and leakage as the signal travels down the cable. Insertion loss can be verified prior to deployment, when you have access to both ends of the cable, or on installed cables with access to the opposite end.

The MT8212B Cell Master automatically calculates and displays the average cable loss so there's no more guess work or need for complicated calculations in the field.

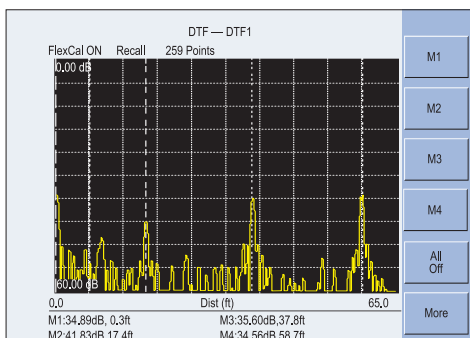

Distance-to-Fault

Although a Return Loss test can show users the magnitude of signal reflections, it can not show the precise location of a fault within the cable and antenna system. Distance-To-Fault measurements provide the clearest indication of trouble areas as it shows both the magnitude of the signal reflection and the location of the signal anomaly.

Distance-To-Fault can easily identify connector transitions, jumpers and kinks in the cable and antenna system. Return Loss/SWR measurement data is processed using Fast Fourier Transform and the resulting data indicates Return Loss/SWR versus distance.


Distance-To-Fault pinpoints the location and reflection amplitude of transmission line components.

Spectrum Analysis – Anywhere, Anytime

The Cell Master MT8212B integrated spectrum analysis capability provides the “ultimate” in measurement flexibility for field environments and applications requiring mobility. With the MT8212B you can locate, identify, record and solve communication systems problems quickly and easily, and with incredible accuracy – making it a perfect solution for conducting field measurements in the 100 kHz to 3 GHz frequency range.


Smart Measurements

The Cell Master MT8212B has dedicated routines for smart measurements of field strength, channel power, occupied bandwidth, Adjacent Channel Power Ratio (ACPR), Carrier-to-Interference and interference analysis. These are increasingly critical measurements for today’s wireless communication systems. The simple interface for these complex measurements significantly reduces test time and increases analyzer usability.

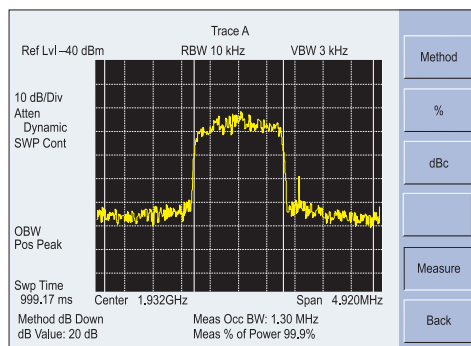

Occupied Bandwidth

This measurement calculates the bandwidth containing the total integrated power occupied in a given signal bandwidth. There are two different methods of calculation depending on the technique used to modulate the carrier. The user can specify percent of power or the “x” dB down point, where “x” can be from 1 dB to 120 dB below the carrier.

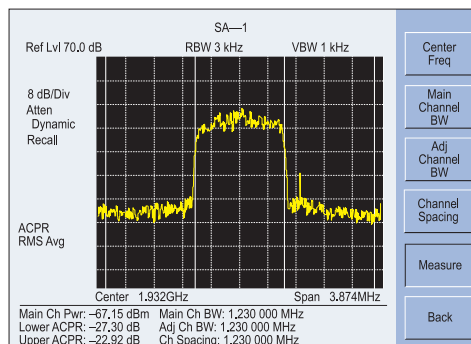

Adjacent Channel Power Ratio

A common transmitter measurement is that of adjacent channel leakage power. This is the ratio of the amount of leakage power in an adjacent channel to the total transmitted power in the main channel. This measurement is used to replace the traditional two-tone intermodulation distortion (IMD) test for system non-linear behavior.

The result of an ACPR measurement can be expressed either as a power ratio or a power density. In order to calculate the upper and lower adjacent channel values, the Cell Master allows the adjustment of four parameters to meet specific measurement needs: main channel center frequency, measurement channel bandwidth, adjacent channel bandwidth and channel spacing. When an air interface standard and channel are specified in the MT8212B, all these values are automatically set to the normal values for that standard.


AM/FM Demodulator

A built-in demodulator for AM, narrowband FM, wideband FM and single sideband (selectable USB and LSB) allows easy identification of interfering signals.

Transmitter Performance Monitoring Made Simple

General purpose test equipment cannot measure all the important parameters of a wireless network. RF technicians and engineers need more sophisticated products to maintain and trouble shoot base stations. Bench top fully featured laboratory design, development and compliance instruments are expensive, big, bulky and very complicated to operate. RF technicians and engineers need an integrated, handheld, multi-function, battery operated and easy to use product to check base station performance.

RF measurements (CDMA, EVDO and GSM) give a general idea of how strong the transmitting signal is and whether the base station is transmitting at the designated frequency. The Cell Master demodulates the CDMA/1xEV-DO signal by connecting to the base station, or using an over the air antenna.

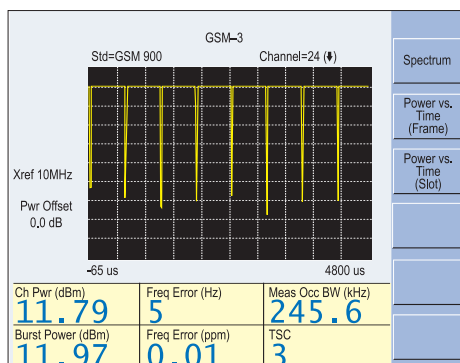


GSM RF Measurements (Option 40)

GSM RF measurements are channel power, burst power, occupied bandwidth, carrier frequency, frequency error and Training Sequence Code (TSC). The Cell Master displays time slot information.

CDMA RF Measurements (Option 42)


CDMA RF measurements are channel power, occupied bandwidth, carrier frequency, frequency error and noise floor.

– Direct Connect or Over The Air

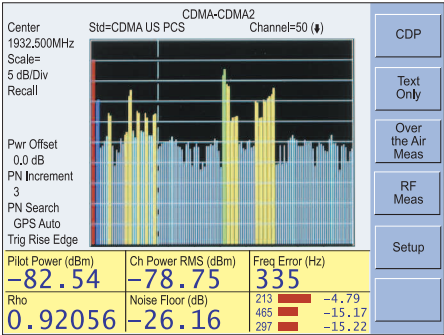

cdmaOne and CDMA2000 1xRTT demodulator (Option 43)

Cell Master demodulates CDMA2000 1xRTT signals displaying code domain power, pilot power, channel power, frequency error, waveform quality (rho), pilot time tolerance (tau), Pilot Ec/Io and carrier feed through. The parameters can be displayed in graphical format or text only format. Code domain power can be displayed as 64 Walsh codes or 128 Walsh codes as bit reversed code.

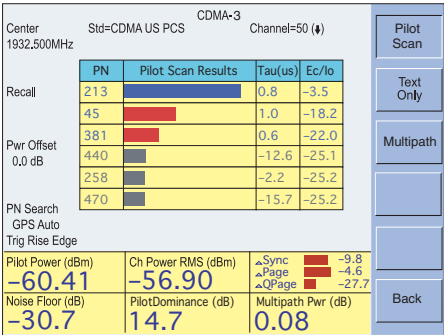

cdmaOne and CDMA2000 1xRTT Over The Air (Option 33)

Over The Air Measurement provides a cost effective way to identify base station performance problems before they become catastrophic without taking the base station off the air. Traditionally, technicians had to bring down the sector or site to test the base station performance. Now technicians can sit in a vehicle and make these measurements.


cdmaOne and CDMA2000 1xRTT Over The Air measurement displays pilot power, channel power, frequency error, noise floor, dominant pilot, multipath power, six strongest pilots with Ec/Io, and two strongest multipaths relative to the strongest pilot.

Make CDMA measurements right from your car or truck.




CDMA2000 1xEV-DO Transmitter Analysis

The data services such as internet browsing or streaming video for the mobile phones are becoming critical to the wireless service providers revenue. With the 3G evolution of CDMA technology, 1xEV-DO provides data rates up to 2.4 Mbps, providing greater system capacity and lower costs, making wireless broadband possible. The CDMA2000 1xEV-DO (1xEV-DO) system is backward compatible and is spectrally identical to the cdmaOne and CDMA2000 systems. For 1xEV-DO technology, an operator should dedicate a single CDMA channel (1.25 MHz) to the packet-data system. This channel cannot carry any voice. In the 1xEV-DO technology, the mobile phone is always connected to the network, even if there is no data flow. The network assigns resources only when it is needed for the data transfer, and may be shared among many users with real time flow control. Cell Master supports 1xEV-DO Rev A.

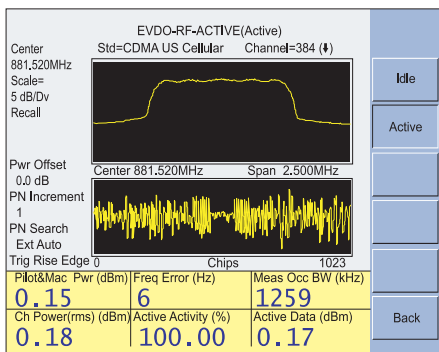

1xEV-DO RF Measurements (Option 62)


CDMA2000 1xEV-DO RF measurements are Pilot/Mac power, Pilot power, frequency error, measured bandwidth, idle/active activity and idle/active data. The RF measurements screen displays the received signal in frequency and time domain format for idle or active activity of the signal.

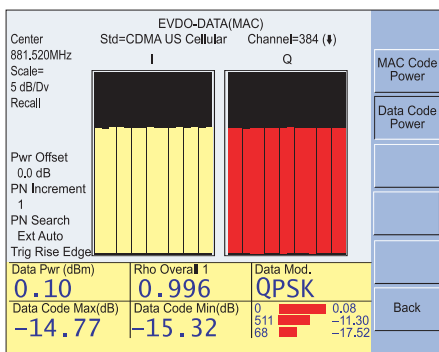

1xEV-DO Demodulator (Option 63)

Cell Master demodulates CDMA2000 1xEV-DO signals displaying code domain power as Mac code power or data code power screens. Mac code power measurement displays Pilot/Mac power, Noise Floor, Rho Overall 1, Rho Overall 2, Rho Pilot, data modulation type, channel power, frequency error, EVM, pilot time tolerance (tau) and carrier feed through.

Data code power measurement displays data power, data code max, data code min, Rho Overall 1, Rho Overall 2, Rho pilot, data modulation type, channel power, frequency error, EVM, pilot time tolerance (tau) and carrier feed through.

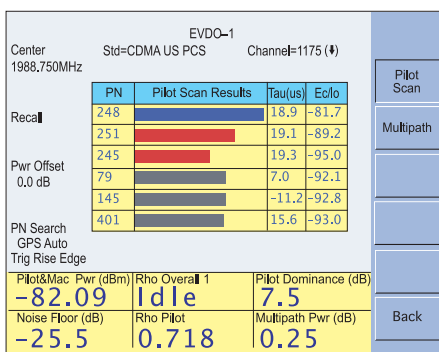


1xEV-DO Over The Air (Option 34)

CDMA2000 1xEV-DO Over The Air measurement displays Pilot/Mac power, Noise Floor, Rho Overall 1, Rho Pilot, Pilot dominance, multipath power, six strongest pilots with power, and two strongest multipaths relative to the strongest pilot.


Built-in Multi-Functions to Increase Technician Productivity

GPS provides location and UTC time information.

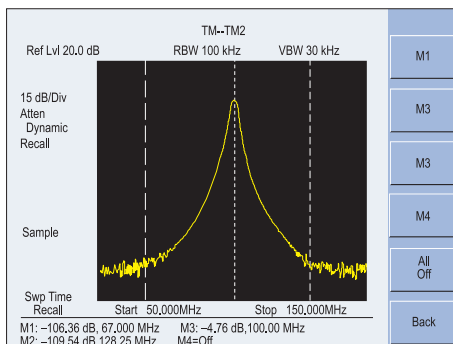


Transmission Measurement (Option 21)

Transmission Measurement is a two port measurement covering the 25 MHz to 3 GHz frequency range. It is a signal source providing the ability to measure loss or gain of two-port devices such as filters, cables, attenuators, duplexers and tower mounted amplifiers. Transmission measurement can also be used to make antenna-to-antenna isolation measurements and for repeater testing.

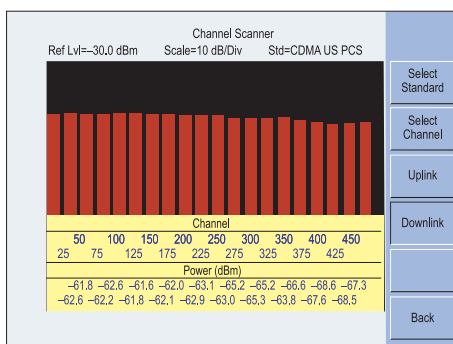

Channel Scanner (Option 27)

The Channel Scanner option measures the power of multiple transmitted signals, and is very useful for measuring channel power in AMPS, iDEN, GSM, and TDMA networks.

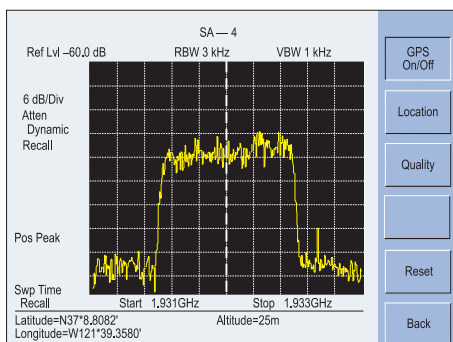


Built-in GPS Provides Location Information (Option 31)

GPS provides location (latitude, longitude, altitude) and UTC time information. The Cell Master can stamp each trace with location information to check if the measurements were taken at the right location. The Cell Master stores the GPS location information until the unit is turned off, so that the stored location information can be used to stamp traces taken indoors at the same cell site location. The GPS option is offered with a magnet mount antenna with a 15 foot (~ 5m) cable to mount on a car or other useful surface.

Interference Analysis – Critical to Wireless Networks


The Cell Master interference analyzer option provides technicians and field engineers the ability to identify and locate interfering signals that affect the quality of service. The Cell Master, with built-in preamplifier, can measure signals down to -135 dBm.

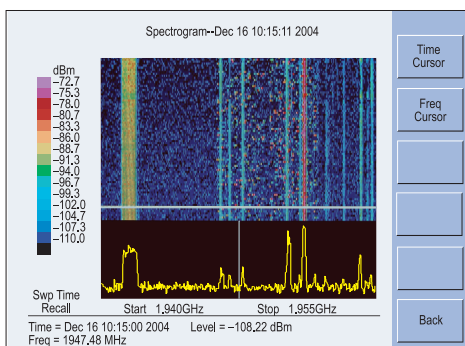

Interference Analyzer (Option 25)


Spectrogram

The Cell Master Spectrogram is a three dimensional display of frequency, power and time of the spectrum activity to identify intermittent interference and track signal levels over time. The Cell Master can save a history up to three days.

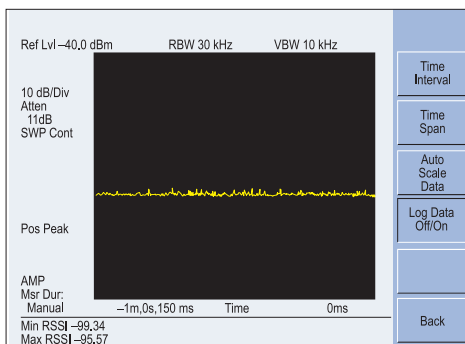

RSSI

RSSI measurement is useful to observe the signal strength of a single frequency over time. The data can be collected for up to seven days.

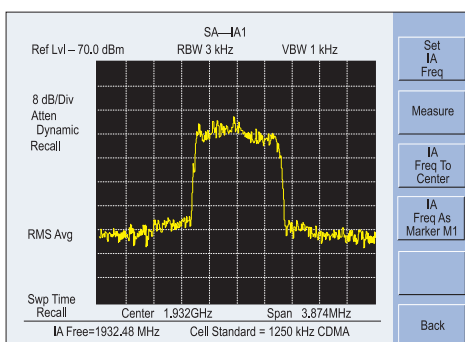


Locating an Interfering Signal

Connect a directional antenna to the Cell Master and locate the interfering source by measuring the strength of the interfering signal. Signal strength is indicated as an audible beep.

Identifying a Signal

The Cell Master MT8212B can provide assistance in identifying signal types from cellular/PCS sites. If you are plagued by an unknown signal, simply enter the frequency of the signal of interest as the “IA Frequency” and press “Measure.” The instrument looks at the bandwidth and shape of the measured signal, and if the signal is of a known type, it gives the name of the air interface standard (e.g., 1250 kHz CDMA) and the measured bandwidth of the signal. If the signal isn’t a cellular/PCS signal, it simply gives the bandwidth.

Cell Master Makes High Accurate Power Measurements

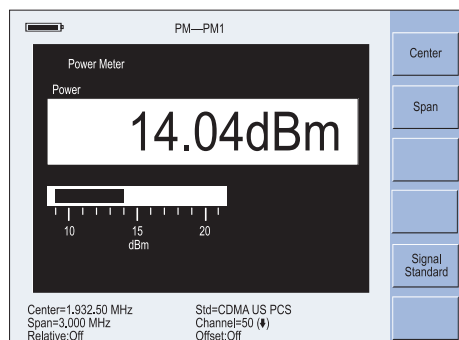

Power Meter (Standard)

The power meter frequency range of 25 MHz to 3 GHz performs accurate transmitter power measurements reducing coverage holes and interference. The measured power is the channel based power and the span can be set from 3MHz to 2.97 GHz. The power can be displayed in dBm or Watts. An external detector is not required for this measurement.

High Accuracy Power Meter (Option 19)

Anritsu's PSN50 sensor makes high accuracy power measurements from 50 MHz to 6 GHz.

The sensor provides true RMS measurements from

–30 to +20 dBm enabling users to make accurate measurements for

CW and digitally modulated signals such as CDMA/EV-DO, GSM/EDGE,

and WCDMA/HSDPA. The

sensor is equipped with an



RS-232 interface for fast and

easy connection to the Cell

Master. Power is displayed in both

dBm and Watts. Upper and lower limits

can be set for Pass/Fail measurements.

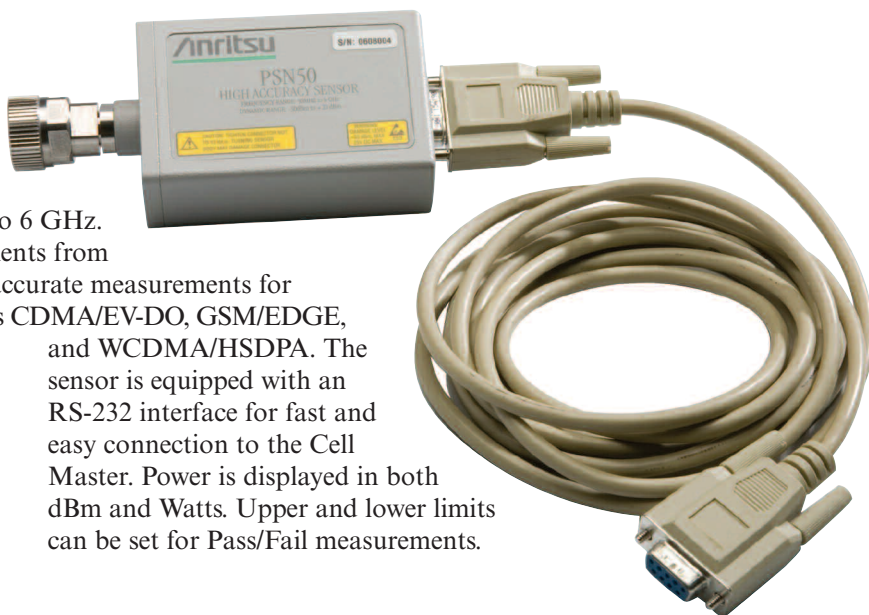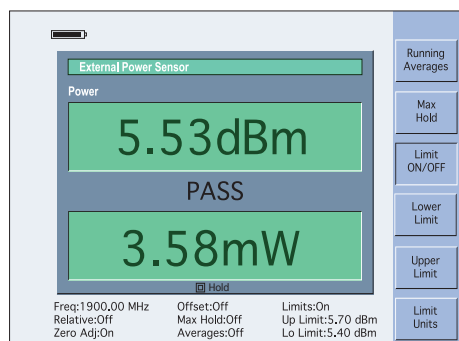

Power Monitor requires external detector (Option 5)

The optional Power Monitor features precision, high return loss (low SWR) detectors which can go up to 50 GHz.

This excellent impedance match significantly reduces the largest component of power measurement error, mismatch uncertainty. Display formats include absolute power (dBm or Watts) and relative power (dBr or %). Built-in Auto-

Averaging automatically reduces the effects of noise while zeroing control allows optimum measurement accuracy at low power levels.


Cell Master is Reliable, Accurate and Field Proven

Bias Tee (Option 10)

The optional bias tee is integrated into the Cell Master and is designed for applications where both DC and RF signals must be applied to a device under test, such as a tower mounted amplifier (TMA).

CW Signal Generator (Option 28)

The CW signal generator provides a CW signal source to test low noise amplifiers, repeaters, and for base stations receiver sensitivity testing.

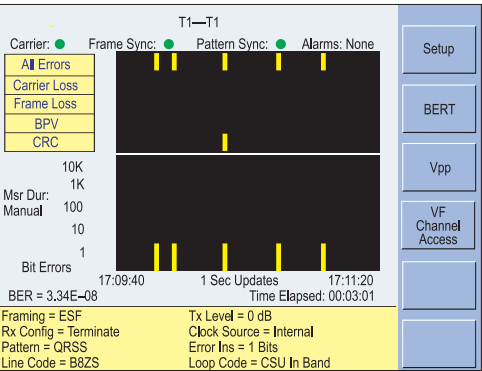

T1/E1 Analyzer (Option 50)



The Cell Master performs full T1/E1 functional tests, simplifying the task of determining if the source of the problem is on the wireline or the wireless side. The data can be displayed in a histogram, and the Cell Master can collect the T1/E1 data for up to two days. The analyzer can also measure the carrier voltage which can be displayed in dBdsx or peak to peak voltage units. The T1/E1 carrier frequency is also measured and displayed in Hz.

The user can manually select a DS0/VF channel and listen to the channel using the Cell Master's integrated speaker. If there is a test tone on the channel, the Cell Master displays the signal level and frequency.


Handheld Software Tools™ for Professional Analysis and Report Generation

A comprehensive data management and analysis software suite comes with every Cell Master providing a simple and easy method of managing, archiving, and analyzing system performance, trends, and the general health of monitored base stations. Handheld Software Tools™ also provides a professional report generator, for those times when recorded data must be communicated.

- Handheld Software Tools is Windows® 95/98/NT4/2000/ME/XP compatible and supports long alphanumeric file names for descriptive data labeling.
- Handheld Software Tools also stores an unlimited number of data traces in one document for comparison of historical performance measurements, easing the task of trend analysis.
- A single menu selection allows the easy transfer of data traces between the MT8212B Cell Master and the PC.
- Add new cables, signal standards and antenna factors to the existing lists and download them into the MT8212B Cell Master.
- Up to 200 Cell Master memory locations can be downloaded with a single menu selection.

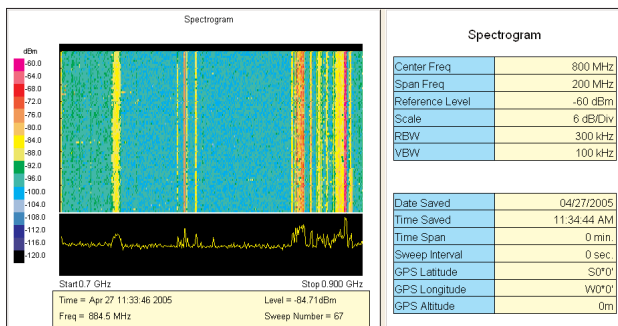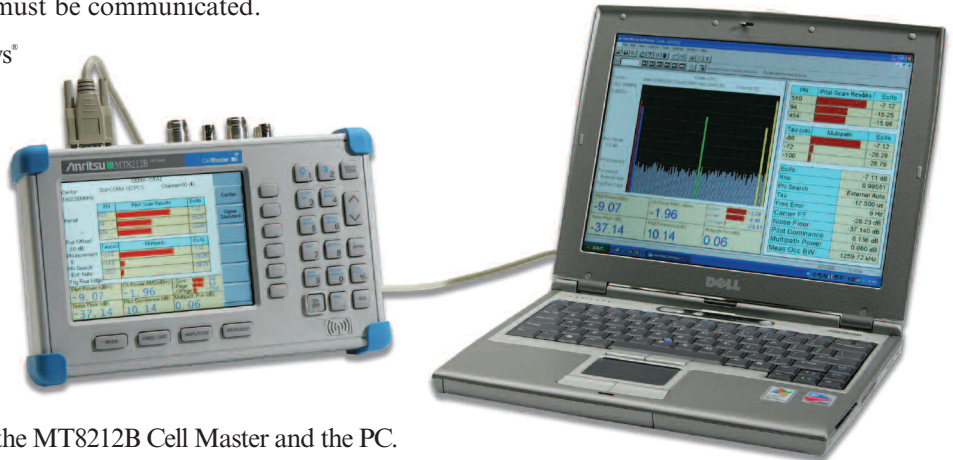

Spectrogram

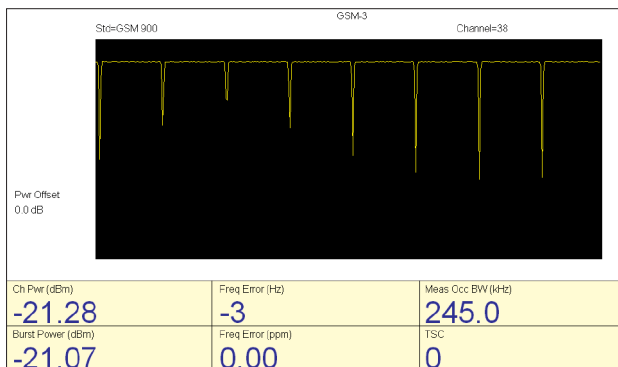

GSM Measurements

- Smith Chart function displays S11 vector magnitude and phase data, allowing system components to be impedance matched for optimum performance.
- Export plot data as text files for use in a spreadsheet.
- Overlay ten traces for accurate analysis.
- Convert Return Loss and SWR frequency domain plots to Distance To Fault Plots.
- Intelligent drag and drop automatically converts traces to a common scale and speeds fault identification.
- Supports long file names for easy measurement data identification.

Specifications

Cable and Antenna Analyzer

Frequency Range: 25 MHz to 4.0 GHz
Frequency Accuracy: ± 75 ppm @ +25°C
Frequency Resolution: 100 kHz
Output Power: < 0 dBm (–10 dBm nominal)
Immunity to Interfering Signals: On-channel +17 dBm
On-frequency –5 dBm
Measurement speed: ≤ 3.5 msec / data point (CW ON)
Number of data points: 130, 259, 517
Return Loss: Range: 0.00 to 60.00 dB
Resolution: 0.01 dB
VSWR: Range: 1.00 to 65.00
Resolution: 0.01
Cable Loss: Range: 0.00 to 30.00 dB
Resolution: 0.01 dB
Measurement Accuracy: >42 dB corrected directivity after calibration
Distance-To-Fault:
Vertical Range: Return Loss: 0.00 to 60.00 dB
VSWR: 1.00 to 65.00
Horizontal Range: 0 to (# of data pts –1) x
Resolution to a maximum of 1197 m (3929 ft), # of data pts = 130, 259 or 517
Horizontal Resolution
(Rectangular windowing): Resolution (meter) = $(1.5 \times 10^3) \times (V_p)/DF$
Where V_p is the cable's relative propagation velocity and where DF is the stop frequency minus the start frequency (in Hz)

Spectrum Analyzer

Frequency:
Frequency Range: 100 kHz to 3.0 GHz (tuneable to 9 kHz)
Frequency Reference (Internal Timebase):
Aging: ± 1 ppm/yr
Accuracy: ± 2 ppm
Frequency Span: 10 Hz to 2.99 GHz in 1, 2, 5 step selections in auto mode, plus zero span
Sweep Time: ≤ 1.3 sec full span; ≤ 50 μ sec to 20 sec zero span
Resolution Bandwidth (–3 dB): 100 Hz to 1 MHz in 1-3 sequence $\pm 5\%$ Accuracy
Video Bandwidth (–3 dB): 3 Hz to 1 MHz in 1-3 sequence
SSB Phase Noise (1 GHz) @ 30 kHz Offset: ≤ -75 dBc/Hz
Spurious Responses Input Related: ≤ -45 dBc
Spurious Residual Responses: ≤ -90 dBm, ≥ 10 MHz
 ≤ -80 dBm, <10 MHz
(10 kHz RBW, pre-amp on)
Amplitude:
Total Level Accuracy: ± 1 dB typical (± 1.5 dB max), ≥ 10 MHz to 3 GHz
 ± 2 dB typical <10 MHz for input signal levels –60 dBm,
excluding input VSWR mismatch
Measurement Range: +20 dBm to –135 dBm
Input Attenuator Range: 0 to 51 dB, selected manually or automatically coupled to
the reference level. Resolution in 1 dB steps.
Displayed Average Noise Level:
 ≤ -135 dBm, ≥ 10 MHz (preamp on)
 ≤ -115 dBm, <10 MHz (preamp on) for input terminated,
0 dB attenuation, RMS detection, 100 Hz RBW
Dynamic Range: >65 dB, typical
Display Range: 1 to 15 dB/division, in 1 dB steps, 10 divisions displayed
Scale Units: dBm, dBV, dBmV, dB μ V, V, W
RF Input VSWR: (with ≥ 20 dB atten.) 1.5:1 typical, (10 MHz to 2.4 GHz)

AM/FM Demodulator

Standard Speaker and Headphone Jack

Power Meter

Frequency Range: 4.5 MHz to 3.0 GHz
Display Range: –80 dBm to +80 dBm
Measurement Range: –80 dBm to +20 dBm (+80 dBm with external attenuator)
Offset Range: 0 to +60 dB
Accuracy*: ± 1 dB typical (± 1.5 dB max), ≥ 10 MHz to 3 GHz
 ± 2 dB typical <10 MHz
VSWR: 1.5:1 typical ($P_{in} > -30$ dBm, >10 MHz to 2.4 GHz)
Maximum Power: +20 dBm (0.1W) without external attenuator
**(Excludes Input VSWR)

Power Monitor (Option 5)

Detector Range: 1A peak 150 ms, 300 mA max steady state
Offset Range: –50 to +20 dBm, 10 nW to 100 nW
Display Range: –80 to 80 dBm
Resolution: 0.1 dB, 0.1 xW
Measurement Accuracy: ± 1 dB maximum for >–40 dBm and <18 GHz

Bias Tee (Option 10A)

Voltage: +12 to +24V
Max Power: 6 W (steady state)
Max Current: 6/Voltage (steady state)

High Accuracy Power Meter PSN50 (Option 19)

Sensor:
Measurement Range: –30 to +20 dBm
Frequency Range: 50 MHz to 6 GHz
Input Connector: Type N, male, 50 Ω
Max Input Without Damage: +33 dBm, ± 25 VDC
Input Return Loss: 50 MHz to 2 GHz: ≥ 26 dB
2 GHz to 6 GHz: ≥ 20 dB
Accuracy:
Total RSS Measurement Uncertainty (0 to 50C): ± 0.16 dB*
Noise: 20 nW max
Zero Set: 20 nW
Zero Drift: 10 nW max**
Sensor Linearity: ± 0.13 dB max
Instrumentation Accuracy: 0.00 dB
Sensor Cal Factor Uncertainty: ± 0.06 dB
Temperature Compensation: ± 0.06 dB max
Continuous digital modulation uncertainty: + 0.06 dB (+17 to +20 dBm)
System:
Measurement Resolution: 0.01 dB
Offset Range: ± 60 dB
Power Requirements:
Supply Voltage: 8 to 18 Vdc
Supply Current: <100 mA

* Excludes mismatch errors.
Excludes noise, zero set, zero drift for levels <–20 dBm.
Excludes digital modulation uncertainty between +17 and +20 dBm.
** After 30 min warm-up

Specifications (Continued)

Transmission Measurement (Option 21)

RF Source:

Frequency Range: 25 MHz to 3 GHz
Frequency Resolution: 10 Hz
Output Power Level: -10 dBm typical
Dynamic Range: 80 dB, 25 MHz to 2 GHz
60 dB, >2 GHz to 3 GHz
Output Impedance: 50Ω

Interference Analyzer (Option 25)

Identify Interference type
Audible tone - Strength of the Interferer
RSSI
Spectrogram

Channel Scanner (Option 27)

Frequency Range: 100 kHz to 3.0 GHz
Frequency Accuracy: ± 10 Hz + Time base error, 99% Confidence level
Measurement Range: +20 dBm to -110 dBm
Channel Power: ± 1 dB typical (± 1.5 dB max)
Adjacent Channel Power Accuracy: ± 0.75 dBc

GPS (Option 31)

GPS Location Indicator
Latitude, Longitude and Altitude on Display
Latitude, Longitude and Altitude with trace storage

cdmaOne and CDMA2000 1xRTT Over The Air (Option 33)

Over The Air Measurement: Six strongest pilots with power
Two multipaths relative to strongest pilot
Tau: ± 2 μ s

CDMA RF Measurements (Option 42)

Occupied Bandwidth: Bandwidth within which 99% of the power transmitted
on a single channel lies
Channel power: ± 1 dB typical (± 1.5 dB max)
Frequency error: ± 50 Hz + Time base error, 99% confidence level

cdmaOne and CDMA2000 1xRTT Demodulator (Option 43)

Residual rho: ≥ 0.98 for RF input from +20 dBm to -48 dBm
Rho accuracy: ± 0.01 for $\rho \geq 0.9$
Code domain power (CDP): Accurate to within ± 1.5 dB above -20dB for RF input
from +20dBm to -48 dBm CDP
can be displayed for RF input from +20dBm to -90 dBm
Carrier Frequency Error: ± 50 Hz 99% confidence level
Power accuracy: ± 1 dB typical (± 1.5 dB absolute)
PN Offset: within 1 x 64 chi

GSM RF Measurements (Option 40)

Occupied Bandwidth: Bandwidth within which 99% of the power transmitted
on a single channel lies.
Channel Power: ± 1 dB typical (± 1.5 dB max)
Burst Power: ± 1 dB typical for -20 dBm to +20 dBm (± 1.5 dB max)
 ± 1.75 dB typical for -80 dBm to -20 dBm (± 2 dB max)
Frequency Error: ± 10 Hz + Time base error, 99% confidence level

E1 Analyzer (Option 50)

Line Coding: AMI, HDB3
Framing Modes: PCM30, PCM30CRC, PCM31, PCM31CRC
Connection Configurations: Terminate (75Ω, 120Ω)
Bridge ($\geq 1000\Omega$)
Monitor (Connect via 20 dB pad in DSX)
Receiver Sensitivity: 0 to -43 dB
Clock Sources: External
Internal: 2.048 MHz ± 30 ppm
Pulse Shapes: Conform to ITU G.703
Pattern Generation and Detection: PRBS: 2-9, 2-11, 2-15, 2-20, 2-23 Inverted and non-inverted, QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24, All ones, All zeros, T1-Daly, User defined (≤ 32 bits)
Circuit Status Reports: Carrier present, Frame ID and Sync., Pattern ID and Sync.
Alarm Detection: AIS, RAI, MMF
Error Detection: Frame Bits, Bit, BER, BPV, CRC, E-Bits, Error Sec
Error Insertion: Bit, BPV, Framing Bits, RAI, AIS
Loopback Modes: Self loopback
Level Measurements: Vp-p ($\pm 5\%$)
Data Log: Continuous, up to 48 hrs
E1 Frequency Measurement: ± 10 ppm
VF Channel Access:
Tone Generator: Frequency: 100 Hz to 3000 Hz
Level: -30 to 0 dBm
Audio Monitor: manually select channel 1-31
VF Measurement: Frequency: 100 Hz to 3000 Hz ± 2 Hz
Level: -40.0 to +3.0 dBm ± 0.2 dBm
ITU G-821 Analysis: Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes

T1 Analyzer (Option 50)

Line Coding: AMI, B8ZS
Framing Modes: D4 (Superframe)
ESF (Extended Superframe)
Connection Configurations: Terminate (100Ω)
Bridge ($\geq 1000\Omega$)
Monitor (Connect via 20 dB pad in DSX)
Receiver Sensitivity: 0 to -36 dBdsx
Transmit Level: 0 dB, -7.5 dB, and -15 dB
Clock Sources: External
Internal: 1.544 MHz ± 30 ppm
Pulse Shapes: Conform to ANSI T1.403
Pattern Generation and Detection: PRBS: 2-9, 2-11, 2-15, 2-20, 2-23 Inverted and non-inverted, QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24, All ones, All zeros, T1-Daly, User defined (≤ 32 bits)
Circuit Status Reports: Carrier present, Frame ID and Sync., Pattern ID and Sync.
Alarm Detection: AIS (Blue Alarm)
RAI (Yellow Alarm)
Error Detection: Frame Bits, Bit, BER, BPV, CRC, Error Sec
Error Insertion: Bit, BPV, Framing Bits, RAI, AIS
Loopback Modes: Self loop, CSU, NIU, User defined, In-band or Data Link
Level Measurements: Vp-p ($\pm 5\%$), can also display in dBdsx
Data Log: Continuous, up to 48 hrs
T1 Frequency Measurement: ± 10 ppm
DS0 Channel Access:
Tone Generator: Frequency: 100 Hz to 3000 Hz
Level: -30 to 0 dBm, 1 dB steps
Audio Monitor: Manually select channel 1 to 24
VF Measurement: Frequency: 100 Hz to 3000 Hz, ± 2 Hz
Level: -40.0 to +3.0 dBm, ± 0.2 dBm
ITU G-821 Analysis: Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes

Specifications (Continued)

1xEV-DO Over The Air (Option 34)

Over The Air Measurement: Six strongest pilots with power
Two multipaths relative to strongest pilot
Tau: $\pm 2 \mu\text{s}$

1xEV-DO RF Measurements (Option 62)

Occupied Bandwidth: Bandwidth within which 99% of the power transmitted
on a single channel lies
Channel power: $\pm 1 \text{ dB}$ typical ($\pm 1.5 \text{ dB}$ max)
Frequency error: $\pm 50 \text{ Hz}$ + Time base error, 99% confidence level
Graphs: Idle and active power versus time graph

1xEV-DO Demodulator (Option 63)

Rho Accuracy: ± 0.02 for $0.9 < \rho < 1$
Code Domain Power Display: Demodulation from -80 dBm to $+15 \text{ dBm}$
Code Domain Power (CDP): $\pm 1 \text{ dB}$ when $> -20 \text{ dB}$ relative to Tx power
Mac Code Power: $\pm 1 \text{ dB}$ CDP level $> -20 \text{ dB}$ relative to total power in MAC interval
Data Code Power: $\pm 1 \text{ dB}$ for non-idle slot data
Frequency Accuracy: $\pm 50 \text{ Hz}$ + timebase error for 99% of measurements
Channel Power: $\pm 1 \text{ dB}$ typical ($\pm 1.5 \text{ dB}$ absolute)
Pilot Power: $\pm 1 \text{ dB}$ typical ($\pm 1.5 \text{ dB}$ absolute)

General

Language Support: English, Spanish, French, German, Chinese, Japanese
Internal Trace Memory: Up to 300 traces
Setup Configuration: 25
Display: TFT Color display, viewable in sunlight
Inputs and Outputs Ports:
RF Out: Type N, female, 50Ω
Maximum Input without Damage: $+20 \text{ dBm}$, $\pm 50 \text{ VDC}$
RF In: Type N, female, 50Ω
Maximum Input without Damage: $+43 \text{ dBm}$ (Peak), $\pm 50 \text{ VDC}$
CDMA Timing Input: BNC, female (5V TTL)
Ext. Trig In: BNC, female (5V TTL)
Ext. Freq Ref In (2 to 20 MHz): Shared BNC, female, 50Ω , (-15 dBm to $+10 \text{ dBm}$)
GPS Antenna: reverse BNC
T1/E1 (Receive & Transmit): Bantam Jack
RF Detector: Type N(m), 50Ω
Serial Interface: RS-232 9 pin D-sub, three wire serial
Electromagnetic Compatibility: Meets European Community requirements for CE marking
Safety: Conforms to EN 61010-1 for Class 1 portable equipment
Temperature:
Operating: -10°C to 55°C , humidity 85% or less
Non-operating: -51°C to $+71^\circ\text{C}$ (Recommend the battery be stored separately
between 0°C and $+40^\circ\text{C}$ for any prolonged non-operating storage period.)
Power Supply:
External DC Input: $+12.5$ to $+15 \text{ VDC}$, 1500mA
Internal: NiMH battery: 10.8 volts , 1800 mA maximum
Dimensions:
Size (w x h x d): $254 \text{ mm} \times 178 \text{ mm} \times 61 \text{ mm}$ ($10.0 \text{ in} \times 7.0 \text{ in} \times 2.4 \text{ in}$)
Weight: $<2.28 \text{ kg}$ ($<5 \text{ lbs}$) includes battery

Ordering Information

Base Model	Description
MT8212B	Cable and Antenna Analyzer (25 MHz to 4.0 GHz), Spectrum Analyzer (100 kHz to 3.0 GHz), and Power Meter (4.5 MHz to 3.0 GHz)

Options	Description
Option 5	Power Monitor (requires external detector)
Option 10A	Bias Tee
Option 19	High Accuracy Power Meter (PSN50 sensor not included)
Option 21	Transmission Measurement
Option 25	Interference Analyzer (requires directional antenna)
Option 27	Channel Scanner
Option 28	CW Signal Generator (requires CW Signal Generator Kit)
Option 31	GPS (includes GPS antenna)
Option 33	cdmaOne and CDMA2000 1xRTT Over The Air (OTA) (requires Options 31 and 43)
Option 34	1xEV-DO Over The Air (OTA) (requires Options 31 and 63)
Option 40	GSM RF Measurements
Option 42	CDMA RF Measurements
Option 43	cdmaOne and CDMA2000 1xRTT Demodulator
Option 50	T1/E1 Analyzer
Option 62	1xEV-DO RF Measurements
Option 63	1xEV-DO Demodulator

Standard Accessories Include:	
10580-00089	Cell Master User's Guide (for Model MT8212B)
2300-347	Anritsu Handheld Software Tools CDRom
48258	Soft Carrying Case
633-27	Rechargeable Battery, NiMH
40-168	AC-DC Adapter with Power Cord
806-141	Automotive Cigarette Lighter/12 Volt DC Adapter
800-441	Serial Interface Cable
	One Year Warranty

Optional Accessories	
1N50C	Limiters, N(m) to N(f), 50Ω, 10 MHz to 18 GHz
42N50-20	Attenuator, 20 dB, 5 watt, DC to 18 GHz, N(m)-N(f)
42N50A-30	Attenuator, 30 dB, 50 watt, DC to 18 GHz, N(m)-N(f)
ICN50	InstaCal™ Calibration Module, 2 MHz to 4.0 GHz, N(m), 50Ω
22N50	Open/Short, DC to 18 GHz, N(m), 50Ω
22NF50	Open/Short, DC to 18 GHz, N(f), 50Ω
SM/PL	Precision Load, DC to 4 GHz, 42 dB, N(m), 50Ω
SM/PLNF	Precision Load, DC to 4 GHz, 42 dB, N(f), 50Ω
OSLN50LF	Precision Open/Short/Load, DC to 4 GHz, 42 dB, 50Ω, N(m)
OSLNF50LF	Precision Open/Short/Load, DC to 4 GHz, 42 dB, 50Ω, N(f)
2000-767	Precision Open/Short/Load, DC to 4 GHz, 7/16 DIN(m), 50Ω
2000-768	Precision Open/Short/Load, DC to 4 GHz, 7/16 DIN(f), 50Ω

15NN50-1.5C	Test Port Cable Armored, 1.5 meters, N(m)-N(m), 6 GHz, 50Ω
15NN50-3.0C	Test Port Cable Armored, 3.0 meters, N(m)-N(m), 6 GHz, 50Ω
15NN50-5.0C	Test Port Cable Armored, 5.0 meters, N(m)-N(m), 6 GHz, 50Ω
15NNF50-1.5C	Test Port Cable Armored, 1.5 meters, N(m)-N(f), 6 GHz, 50Ω
15NNF50-3.0C	Test Port Cable Armored, 3.0 meters, N(m)-N(f), 6 GHz, 50Ω
15NNF50-5.0C	Test Port Cable Armored, 5.0 meters, N(m)-N(f), 6 GHz, 50Ω
15ND50-1.5C	Test Port Cable Armored, 1.5 meters, N(m)-7/16 DIN(m), 6 GHz, 50Ω
15NDF50-1.5C	Test Port Cable Armored, 1.5 meters, N(m)-7/16 DIN(f), 6 GHz, 50Ω
34NN50A	Precision Adapter, N(m)-N(m), DC to 18 GHz, 50Ω
34N50NF50	Precision Adapter, N(f)-N(f), DC to 18 GHz, 50Ω
1091-26	Adapter, N(m)-SMA(m), DC to 18 GHz, 50Ω
1091-27	Adapter, N(m)-SMA(f), DC to 18 GHz, 50Ω
1091-80	Adapter, N(f)-SMA(m), DC to 18 GHz, 50Ω
1091-81	Adapter, N(f)-SMA(f), DC to 18 GHz, 50Ω
1091-172	Adapter, N(m)-BNC(f), DC to 1.3 GHz, 50Ω
510-90	Adapter, 7/16 DIN(f)-N(m), DC to 7.5 GHz, 50Ω
510-91	Adapter, 7/16 DIN(f)-N(f), DC to 7.5 GHz, 50Ω
510-92	Adapter, 7/16 DIN(m)-N(m), DC to 7.5 GHz, 50Ω
510-93	Adapter, 7/16 DIN(m)-N(f), DC to 7.5 GHz, 50Ω
510-96	Adapter, 7/16 DIN(m)-7/16 DIN(m), DC to 7.5 GHz, 50Ω
510-97	Adapter, 7/16 DIN(f)-7/16 DIN(f), DC to 7.5 GHz, 50Ω
510-102	Adapter, N(m)-N(m) 90° right angle, DC to 11 GHz, 50Ω
2000-1030	Portable Antenna, SMA(m), 1.71 to 1.88 GHz, 50Ω
2000-1031	Portable Antenna, SMA(m), 1.85 to 1.99 GHz, 50Ω
2000-1032	Portable Antenna, SMA(m), 2.4 to 2.5 GHz, 50Ω
2000-1200	Portable Antenna, SMA(m), 806-869 MHz, 50Ω
2000-1035	Portable Antenna, SMA(m), 896-941 MHz, 50Ω
2000-1361	Portable Antenna, SMA(m), 5.725-5.825 GHz, 50Ω
61532	Antenna Kit: 2000-1030, 2000-1031, 2000-1032, 2000-1035, 2000-1200, and 2000-1361
2000-1411	Portable YAGI Antenna, N(f), 822-900 MHz, 10 dBd
2000-1412	Portable YAGI Antenna, N(f), 885-975 MHz, 10 dBd
2000-1413	Portable YAGI Antenna, N(f), 1.71-1.88 GHz, 10 dBd
2000-1414	Portable YAGI Antenna, N(f), 1.85-1.99 GHz, 9.3 dBd
2000-1415	Portable YAGI Antenna, N(f), 2.4-2.5 GHz, 12 dBd
2000-1416	Portable YAGI Antenna, N(f), 1.92-2.23 GHz, 12 dBd
1030-109	Filter, Bandpass, 836.5 MHz Ctr Freq, 25.8 MHz BW, N(m) to SMA(f), 50Ω
1030-110	Filter, Bandpass, 897.5 MHz Ctr Freq, 35 MHz BW, N(m) to SMA(f), 50Ω
1030-111	Filter, Bandpass, 1.88 GHz Ctr Freq, 63.1 MHz BW, N(m) to SMA(f), 50Ω
1030-112	Filter, Bandpass, 2.442 GHz Ctr Freq, 85.1 MHz BW, N(m) to SMA(f), 50Ω

Ordering Information (Continued)

2000-1410	Magnet Mount GPS Antenna with 15 ft. cable
61534	CW Signal Generator Kit with variable step attenuator
806-16	Bantam Plug to Bantam Plug
806-116	Bantam Plug to BNC
806-117	Bantam "Y" Plug to RJ48
551-1691	USB to RS-232 adapter cable
48258	Soft Carrying Case
760-235	Transit Case
633-27	Rechargeable Battery, NiMH
2000-1029	Battery Charger, NiMH, w/ Universal Power Supply
40-168	AC/DC Adapter
806-62	Automotive Cigarette Lighter/12 Volt DC Adapter
800-441	Serial Interface Cable
2300-347	Handheld Software Tools CDRom

High Accuracy Power Meter Accessories

PSN50	High Accuracy Power Sensor, 50 MHz to 6 GHz
40-168	AC-DC Adapter
800-441	Serial Interface Cable
3-1010-122	Attenuator (Bi-directional), 20 dB, 5 Watt, DC to 12.4 GHz, N(m)-N(f)
3-1010-123	Attenuator (Bi-directional), 30 dB, 50 Watt, DC to 8.5 GHz, N(m)-N(f)
3-1010-124	Attenuator (Uni-directional), 40 dB, 100 Watt, DC to 8.5 GHz, N(m)-N(f)
65701	3 GHz Offset Cal Kit consisting of one each: 3-1010-119, 10 dB Attenuator, DC to 6 GHz, 2W 3-806-151, 4 GHz Cable, 18" (46 cm)

Manuals

10580-00089	Cell Master User's Guide (for Model MT8212B)
10580-00106	Cell Master Programming Manual (for Model MT8212B)
10580-00107	Cell Master Maintenance Manual (for Model MT8212B)

Printers

1091-310	Adapter 36-pin Centronics female-to-DB25 female
2000-663	Power Cable (Europe) for DeskJet Printer
2000-664	Power Cable (Australia) for DeskJet Printer
2000-667	Power Cable (S. Africa) for DeskJet Printer
2000-753	Null Modem Serial-to-Parallel Centronics Converter Cable
2000-1214	HP DeskJet Printer, Model 450: Includes printer cable, 2000-1216 black print cartridge and U.S. power cord. Also includes 2000-753 serial-to-parallel Centronics converter cable and 1091-310 Centronics-to DB25 adapter. Rechargeable battery is optional and is not included.
2000-1216	Black Print Cartridge
2000-1217	Rechargeable Battery for DeskJet Printer, Model 450
2000-1218	Power Cable (U.K.) for DeskJet Printer

Power Monitor - Detectors

The 5400 and 560 Series Detectors use zero-biased Schottky diodes. Measurement range is –55 dBm to +16 dBm using single cycle per sweep AC detection, auto-zeroing with DC detection during the frequency sweep. Extender cables of over 3000 feet can be used with the MT8212B Cell Master.

Model	Frequency Range	Impedance	Return Loss	Input Connector	Frequency Response
5400-71N50	0.001 to 3 GHz	50W	26 dB	N(m)	±0.2 dB, <1 GHz ±0.3 dB, <3 GHz
5400-71N75	0.001 to 3 GHz	75W	26 dB, <2 GHz 20 dB, <3 GHz	N(m)	±0.2 dB, <1 GHz ±0.5 dB, <3 GHz
560-7A50	0.01 to 18 GHz	50W	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz	GPC-7	±0.5 dB, <18 GHz
560-7N50B	0.01 to 20 GHz	50W	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 14 dB, <20 GHz	N(m)	±0.5 dB, <18 GHz ±1.25 dB, <20 GHz
560-7S50B	0.01 to 20 GHz	50W	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 14 dB, <20 GHz	WSMA(m)	±0.5 dB, <18 GHz ±1.25 dB, <20 GHz
560-7S50-2	0.01 to 26.5 GHz	50W	15 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 14 dB, <26.5 GHz	WSMA(m)	±0.5 dB, <18 GHz ±1.25 dB, <26.5 GHz
560-7K50	0.01 to 40 GHz	50W	12 dB, <0.04 GHz 22 dB, <8 GHz 17 dB, <18 GHz 15 dB, <26.5 GHz 14 dB, <32 GHz 13 dB, <40 GHz	K(m)	±0.5 dB, <18 GHz ±1.25 dB, <26.5 GHz ±2.2 dB, <32 GHz ±2.5 dB, <40 GHz
560-7VA50	0.01 to 50 GHz	50W	12 dB, <0.04 GHz 19 dB, <20 GHz 15 dB, <40 GHz 10 dB, <50 GHz	V(m)	±0.8 dB, <20 GHz ±2.5 dB, <40 GHz ±3.0 dB, <50 GHz



ANRITSU Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

- Australia

ANRITSU Pty Ltd.

Unit 21/170 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

- Brazil

ANRITSU Eletrônica Ltda.

Praca Amadeu Amaral, 27-1 andar
01327-010 - Paraiso, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3886940

- Canada

ANRITSU Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

- Denmark

ANRITSU A/S

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

- Finland

ANRITSU AB

Teknobulevardi 3-5, FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

- France

ANRITSU S.A.

9, Avenue du Québec Z.A. de Courtaboeuf
91951 Les Ulis Cedex, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

- Germany

ANRITSU GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49 (0) 89 442308-55

- India

ANRITSU Corporation

India Liaison Office

Unit No.S-3, Second Floor, Esteem Red Cross Bhavan,
No.26, Race Course Road, Bangalore 560 001 India
Phone: +91-80-32944707
Fax: +91-80-22356648

- Italy

ANRITSU S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

- Korea

ANRITSU Corporation, Ltd.

8F Hyunjuk Bldg. 832-41, Yeoksam-Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

- P. R. China (Beijing)

ANRITSU Company Ltd.

Beijing Representative Office

Room 1515, Beijing Fortune Building,
No. 5, Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 100004, P.R. China
Phone: +86-10-6590-9230
Fax: +82-10-6590-9235

- P. R. China (Hong Kong)

ANRITSU Company Ltd.

Suite 923, 9/F., Chinachem Golden Plaza, 77 Mody Road,
Tsimshatsui East, Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

- Singapore

ANRITSU Pte Ltd.

10, Hoe Chiang Road #07-01/02, Keppel Towers,
Singapore 089315
Phone: +65-6282-2400
Fax: +65-6282-2533

- Sweden

ANRITSU AB

Borgafjordsgatan 13, 164 40 Kista, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

- Taiwan

ANRITSU Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

- U.K.

ANRITSU EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

- United Arab Emirates

ANRITSU EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

- U.S.A.

ANRITSU Company

1155 East Collins Boulevard,
Richardson, Texas 75081
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

Please Contact:

