

# Amplifiers

## Model 30S1G6C

### Features:

- 30 W CW, 1.0 – 6.0 GHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring and protection
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise

### Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
- 4G LTE, 5G NR (FR1/FR2), OFDM, PSK/QAM, Wi-Fi etc.

To view our full amplifier portfolio visit:  
[www.ar.ametek-cts.com](http://www.ar.ametek-cts.com)

AR RF/Microwave Instrumentation  
160 Schoolhouse Rd  
Souderton, PA 18964  
215.723.8181  
ISO 9001: 2015 Certified  
ISO 17025 :2017 Accredited

The Model 30S1G6C is a self-contained, air-cooled, solid-state Class A broadband power amplifier designed for applications demanding wide bandwidth coverage, high gain, and linear performance. It delivers a minimum of 30 W over a frequency range of 1.0 to 6.0 GHz. The unit includes safeguards against input overdrive beyond 0 dBm, as well as various fault conditions such as excessive temperature and power supply issues.

A scalable, module-based design combined with advanced forced-air cooling ensures reliable operation and long-term performance in demanding test environments. A clear front-panel display provides immediate visibility of operating status and fault conditions, enabling fast setup and confident operation. For maximum flexibility, all control and monitoring functions can be accessed either locally via the front panel or remotely through a wide range of standard interfaces, including GPIB/IEEE-488, RS-232, fiber-optic serial, USB, and Ethernet.

This Class A amplifier is engineered for EMC immunity, communications, and aerospace & defense testing, delivering exceptional stability and linearity under demanding load conditions, including high VSWR, open, or short circuits. Low spurious emissions, high spectral purity, and wideband performance make it ideal for modern wireless and 5G applications.

Export classification for this device is EAR99. These goods, technologies, or software are regulated under U.S. Export Administration Regulations, and unauthorized diversion is prohibited by U.S. law.



# Model 30S1G6C

- 30 W
- 1.0 – 6.0 GHz



| Electrical Specifications                               |                |         |           |           |      |
|---------------------------------------------------------|----------------|---------|-----------|-----------|------|
| Parameter                                               | Symbol         | Minimum | Typical   | Maximum   | Unit |
| Rated Power Output                                      | PSAT           | 30      | 40        | >65       | W    |
| Input for Rated Output                                  | Pin            |         |           | 1.0       | mW   |
|                                                         |                |         |           | 0         | dBm  |
| Power Output @ 3 dB Compression                         | P3dB           | 35      | 45        | >70       | W    |
| Power Output @ 1 dB Compression                         | P1dB           | 25      | 35        | >60       | W    |
| Operating Frequency                                     | BW             | 1.0     |           | 6.0       | GHz  |
| Gain (Small Signal)                                     |                | 46      | 48        | 50        | dB   |
| Gain Reduction Adjustment (when below gain compression) |                | 10      | 12        | 15        | dB   |
| Flatness @ small signal (-20 dBm input)                 | $\Delta G$     |         | $\pm 1.5$ | $\pm 2.0$ | dB   |
| Input Impedance                                         | Z in           |         | 50        |           | Ohm  |
|                                                         |                |         | 1.5:1     | 2.0:1     | VSWR |
| Output Impedance                                        | Z out          |         | 50        |           | Ohm  |
| 3 <sup>rd</sup> Order Intercept                         | IP3            |         | +54       |           | dBm  |
| Noise Figure                                            | NF             |         | 10        |           | dB   |
| Harmonic Distortion @ 30 W                              | H2, H3         |         | -30       | -20       | dBc  |
| Spurious                                                |                |         | -73       |           | dBc  |
| Power Consumption                                       | P <sub>D</sub> |         |           | 400       | W    |

| Absolute Maximum Rating                                                                                                                     |                                 |         |          |      |
|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------|----------|------|
| Exceeding any of the limits listed here may result in permanent damage to the device.                                                       |                                 |         |          |      |
| Parameter                                                                                                                                   | Minimum                         | Typical | Maximum  | Unit |
| RF Drive                                                                                                                                    |                                 | 0       | +13      | dBm  |
| RF Load                                                                                                                                     |                                 | 1:1     | $\infty$ | VSWR |
| RF Load Reflected<br>Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry. |                                 |         | 100      | %    |
| AC Power (single phase)                                                                                                                     | 100                             |         | 240      | VAC  |
| AC Power                                                                                                                                    | 47                              | 60      | 63       | Hz   |
| Ambient Temperature                                                                                                                         | +5                              | +25     | +40      | °C   |
| Storage Temperature                                                                                                                         | -20                             |         | +50      | °C   |
| Altitude                                                                                                                                    |                                 |         | 2000     | m    |
| Shock/Vibration                                                                                                                             | MIL-STD-810G Method 514 and 516 |         |          |      |



## Model 30S1G6C

- 30 W
- 1.0 – 6.0 GHz



| Mechanical Specifications                 |                                  |      |
|-------------------------------------------|----------------------------------|------|
| Parameters                                | Typical                          | Unit |
| Dimensions (With Cabinet) (W x H x D)     | 51.0 x 17.0 x 65.3               | cm   |
|                                           | 20.1 x 6.7 x 25.7                | in   |
| Dimensions (No Cabinet) – 3U for 19" Rack | 48.3 x 13.4 x 65.3               | cm   |
|                                           | 19.0 x 5.3 x 25.7                | in   |
| Weight (With Cabinet)                     | 25.9                             | kg   |
|                                           | 57.0                             | lb   |
| Weight (No Cabinet)                       | 15.3                             | kg   |
|                                           | 33.75                            | lb   |
| Cooling                                   | Forced air (self-contained fans) |      |
| Acoustic Noise Measured @ 1 Meter         | 54                               | dBA  |

| Connector Interfaces |                                       |
|----------------------|---------------------------------------|
| Function             | Type                                  |
| RF Input             | N, female, rear (50 Ω) (option front) |
| RF Output            | N, female, rear (50 Ω) (option front) |
| IEEE-488             | 24-pin                                |
| RS-232               | 9 pin subminiature D                  |
| Ethernet             | RJ-45                                 |
| RS-232 (fiber optic) | ST                                    |
| USB 2.0              | Type B                                |
| Interlock            | 15-pin subminiature D                 |

| Regulatory Compliance |                        |
|-----------------------|------------------------|
| Type                  | Standard               |
| EMC                   | EN 61326-1             |
| Safety                | UL 61010-1             |
|                       | CAN/CSA C22.2 #61010-1 |
|                       | CENELEC EN 61010-1     |
| RoHS                  | Directive 2011/65/EU   |
| Export                | 3A001                  |

## Ordering Options


| 30S1G6C      | -  | -                                                                                                                         | N | -           | -                             | N     | - |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
|--------------|----|---------------------------------------------------------------------------------------------------------------------------|---|-------------|-------------------------------|-------|---|---------------------------|---|--|--|--------------------------------------------------------------------------------------------------------------------------------------|--|-----------|--|-----------|---|--------------|----|--|--|
| Model        |    | RF IN Conn<br>Location, Type                                                                                              |   |             | RF OUT Conn<br>Location, Type |       |   | Enclosure<br>No Enclosure |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
|              |    | <table><tr><th colspan="2">N-Connector</th></tr><tr><td>Front</td><td>F</td></tr><tr><td>Rear</td><td>R</td></tr></table> |   | N-Connector |                               | Front | F | Rear                      | R |  |  | <table><tr><th colspan="2">Enclosure</th></tr><tr><td>Enclosure</td><td>E</td></tr><tr><td>No Enclosure</td><td>NE</td></tr></table> |  | Enclosure |  | Enclosure | E | No Enclosure | NE |  |  |
| N-Connector  |    |                                                                                                                           |   |             |                               |       |   |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
| Front        | F  |                                                                                                                           |   |             |                               |       |   |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
| Rear         | R  |                                                                                                                           |   |             |                               |       |   |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
| Enclosure    |    |                                                                                                                           |   |             |                               |       |   |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
| Enclosure    | E  |                                                                                                                           |   |             |                               |       |   |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |
| No Enclosure | NE |                                                                                                                           |   |             |                               |       |   |                           |   |  |  |                                                                                                                                      |  |           |  |           |   |              |    |  |  |

## Model 30S1G6C

- 30 W
- 1.0 – 6.0 GHz




## Envelope Drawing

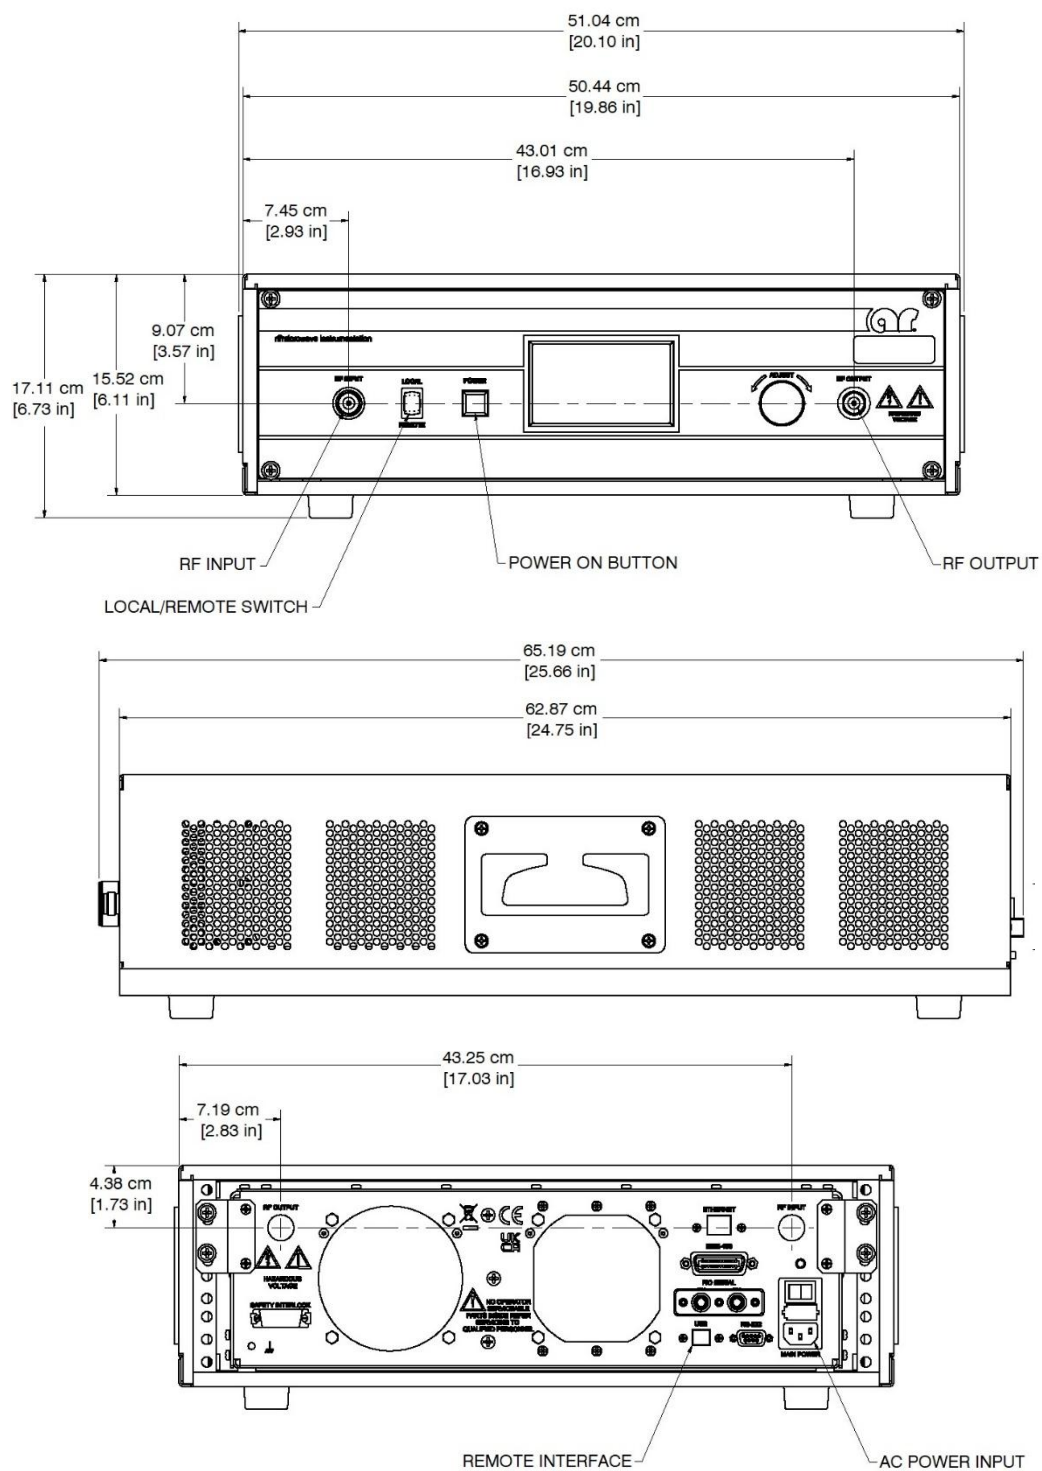


- 30 W
- 1.0 – 6.0 GHz

## TYPICAL PSAT POWER @ 0 dBm INPUT

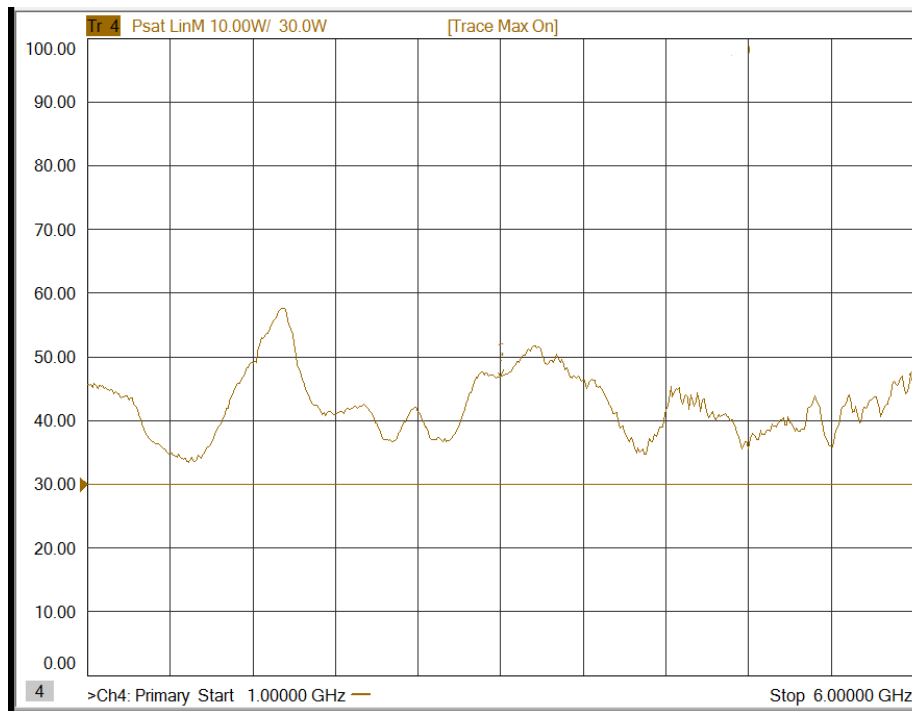


## TYPICAL POWER @ P3 dB COMPRESSION

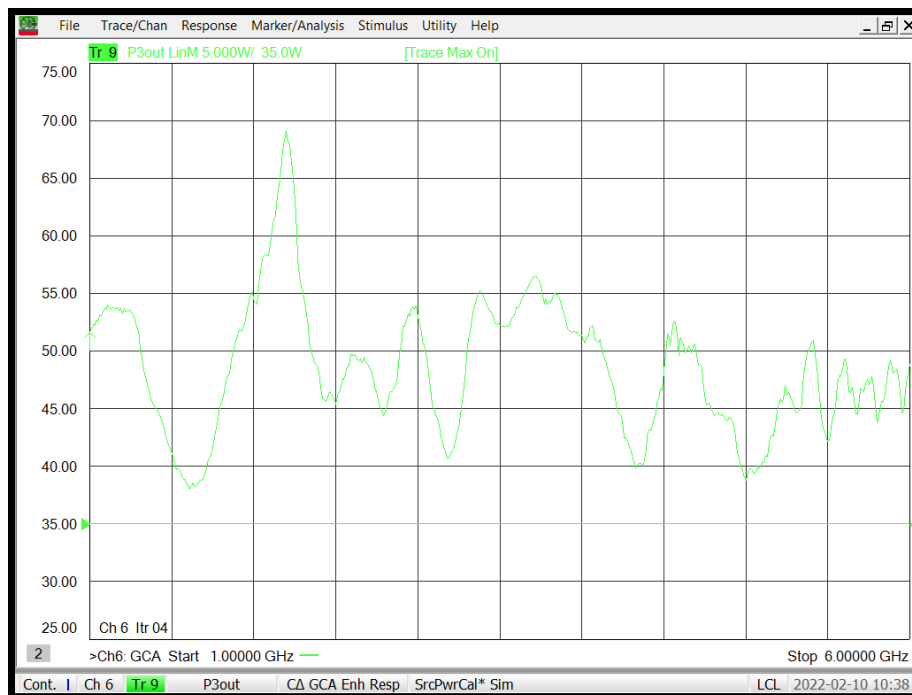


- 30 W
- 1.0 – 6.0 GHz



## TYPICAL POWER @ P1dB COMPRESSION

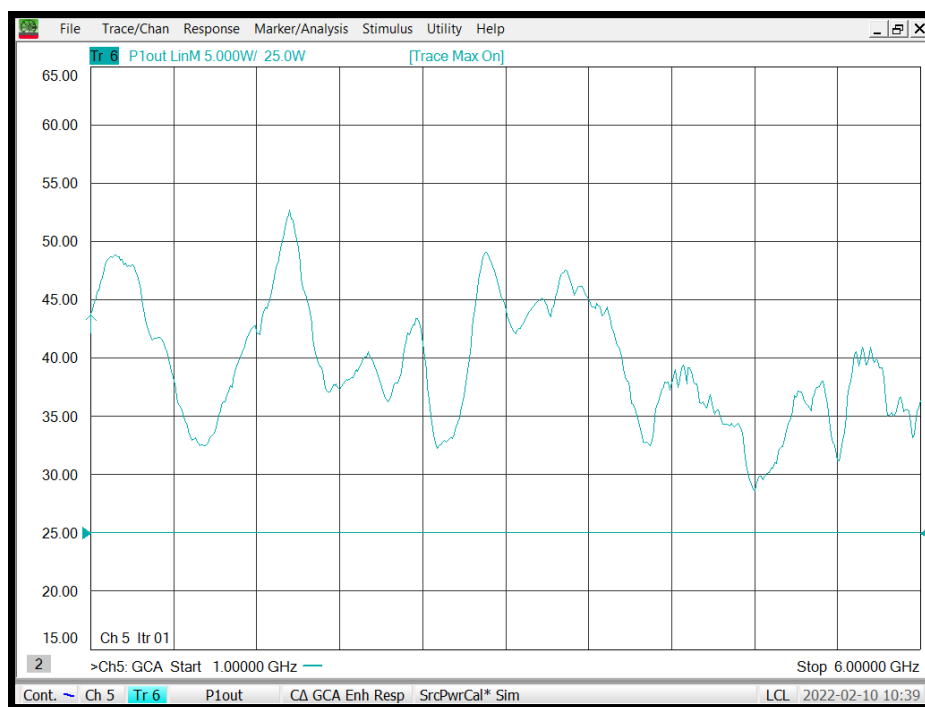

## TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

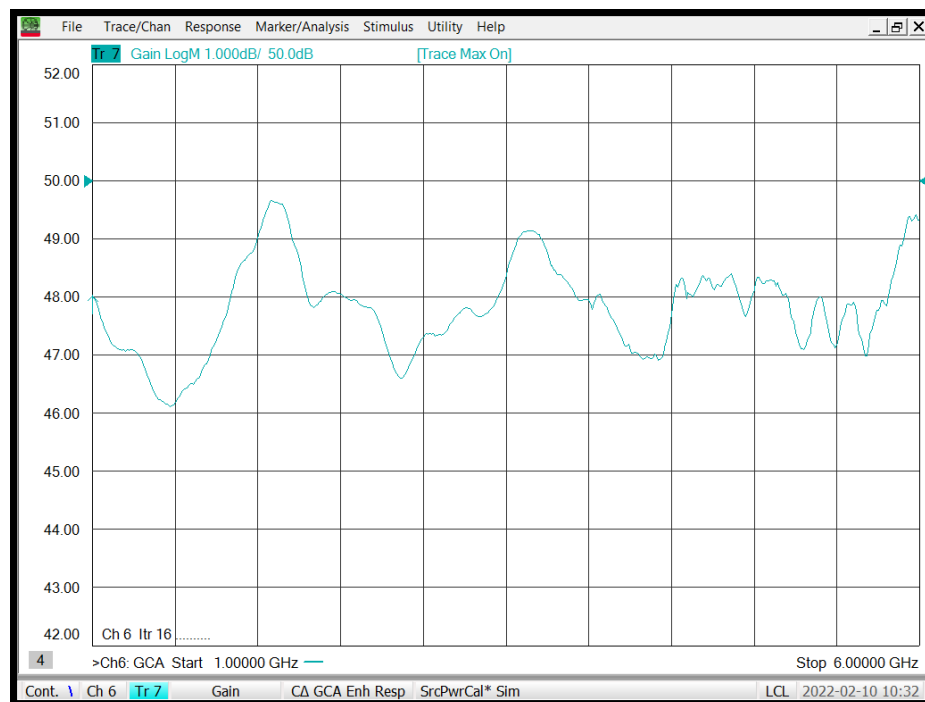

- 30 W
- 1.0 – 6.0 GHz

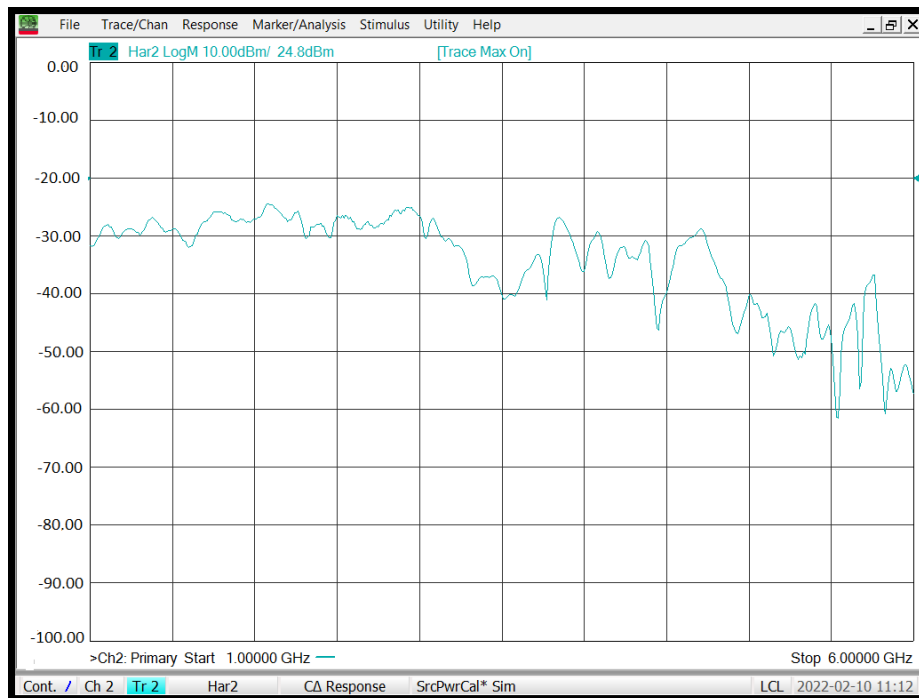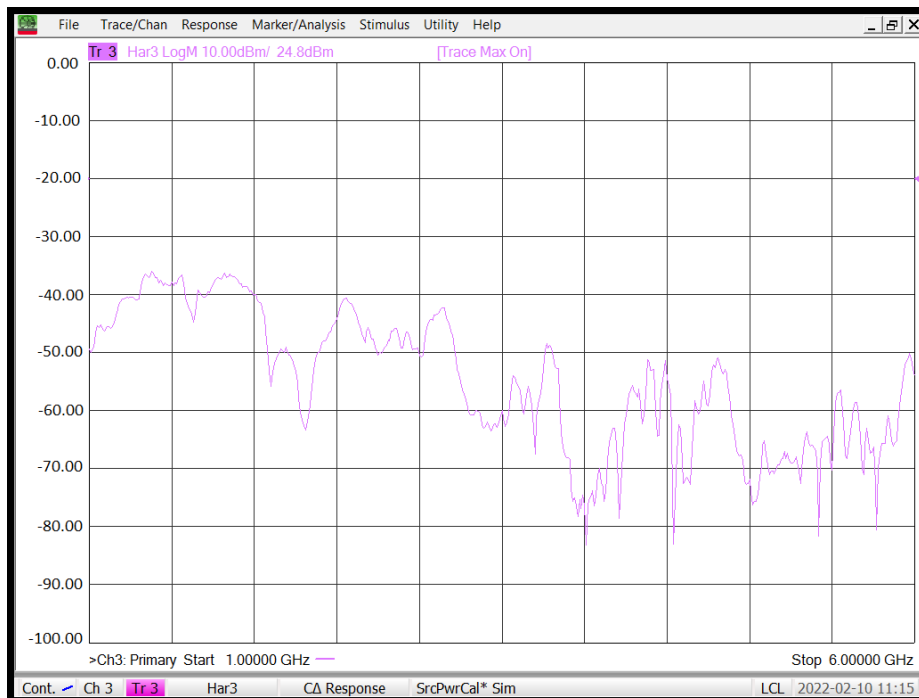
TYPICAL 2<sup>ND</sup> HARMONIC @ 30 W OUTPUTTYPICAL 3<sup>RD</sup> HARMONIC @ 30 W OUTPUT

# Model 30S1G6C

- 30 W
- 1.0 – 6.0 GHz



## TYPICAL INPUT VSWR

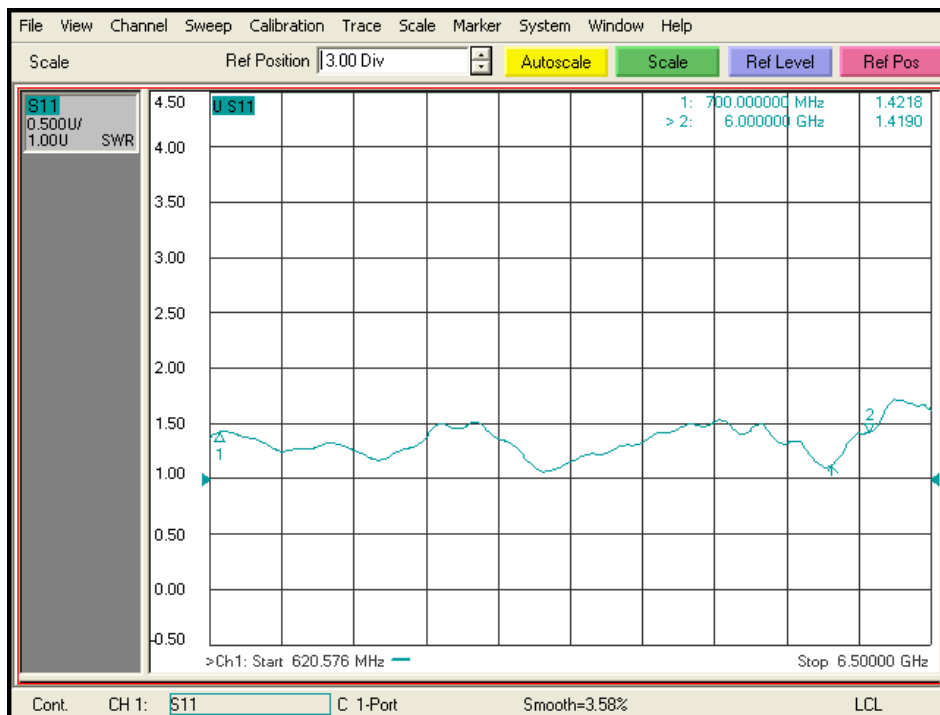

## TYPICAL NOISE FIGURE

Agilent 11:46:20 Dec 21, 2020

