

R&S® ZNBT VECTOR NETWORK ANALYZER

Specifications



Specifications
Version 15.00

ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Measurement range	4
Measurement speed.....	7
Measurement accuracy	10
R&S®ZNBT8.....	10
R&S®ZNBT20.....	11
R&S®ZNBT26 and R&S®ZNBT40	13
Effective system data	15
Factory-calibrated system data	16
Test port output	19
Test port input.....	23
Additional front panel connectors.....	24
Display	24
Rear panel connectors	25
Options	26
R&S®ZNBT-B4	26
R&S®ZNBT-B10	26
R&S®ZNBT-B12	26
R&S®ZNBT8/ZNBT20/ZNBT26/ZNBT40-B21/-B22/-B23/-B24/-B25/-B26	26
R&S®ZNBT-B81	27
R&S®ZNBT8-B108 to R&S®ZNBT8-B124, R&S®ZNBT20/ZNBT26/ZNBT40-B112 to R&S®ZNBT20/ZNBT26/ZNBT40-B124	27
R&S®ZNBT8-B361 to R&S®ZNBT8-B366	27
R&S®ZNBT8-B504/-B508/-B512/-B516/-B520/-B524	27
R&S®ZNBT-K27	28
R&S®ZNBT-K30	29
R&S®ZNBT-K980	29
R&S®ZNBT-Z14	29
R&S®ZNBT-USY	30
General data	31
Dimensions (in mm).....	33
Ordering information	36
Warranty and service.....	39

Definitions


General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, $\leq$, $>$, $\geq$, $\pm$ or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

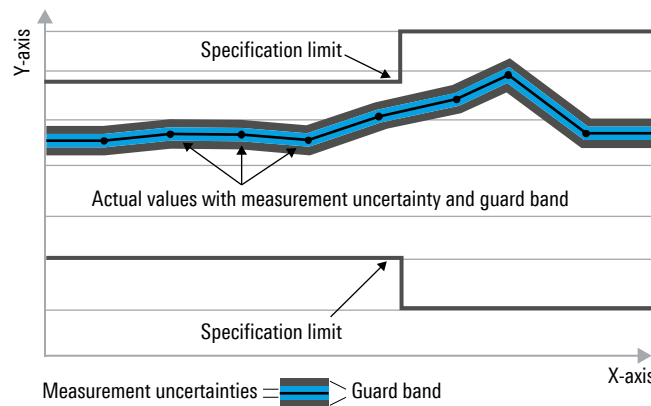

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value, e.g. dimensions or resolution of a setting parameter. Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter, e.g. nominal impedance. In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msamples/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msamples/s are not SI units.

Measurement range



Impedance		50 Ω
Test port connector	R&S®ZNBT8	N, female
	R&S®ZNBT20	3.5 mm, male, ruggedized
	R&S®ZNBT26	2.92 mm, male, ruggedized
	R&S®ZNBT40	2.92 mm, male, ruggedized
Number of test ports (the R&S®ZNBT8 supports simultaneous data acquisition at all test ports)	R&S®ZNBT8 base unit	4
	R&S®ZNBT20 base unit	8
	R&S®ZNBT26 base unit	8
	R&S®ZNBT40 base unit	8
	with R&S®ZNBT8-B108 option	8 (additional ports 5 to 8)
	with R&S®ZNBT8-B112 or R&S®ZNBT20-B112 or R&S®ZNBT26-B112 or R&S®ZNBT40-B112 option	12 (additional ports 9 to 12)
	with R&S®ZNBT8-B116 or R&S®ZNBT20-B116 or R&S®ZNBT26-B116 or R&S®ZNBT40-B116 option	16 (additional ports 13 to 16)
	with R&S®ZNBT8-B120 or R&S®ZNBT20-B120 or R&S®ZNBT26-B120 or R&S®ZNBT40-B120 option	20 (additional ports 17 to 20)
	with R&S®ZNBT8-B124 or R&S®ZNBT20-B124 or R&S®ZNBT26-B124 or R&S®ZNBT40-B124 option	24 (additional ports 21 to 24)
Frequency range	R&S®ZNBT8	9 kHz to 8.5 GHz
	R&S®ZNBT20	100 kHz to 20 GHz
	R&S®ZNBT26	100 kHz to 26.5 GHz
	R&S®ZNBT40	100 kHz to 40 GHz

Static frequency accuracy		(time since last adjustment $\times$ aging rate) + temperature drift + calibration accuracy
Aging per year	standard	$\pm 1 \times 10^{-6}$
	with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +40 °C)	standard	$\pm 1 \times 10^{-6}$
	with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-8}$
Achievable initial calibration accuracy	standard	$\pm 5 \times 10^{-7}$
	with R&S®ZNBT-B4 precision frequency reference option	$\pm 5 \times 10^{-8}$

Frequency resolution		1 Hz
Number of measurement points ¹	per trace	2 to 100001
Measurement bandwidth	1/1.5/2/3/5/7 sequence	
	without optional increased bandwidth	1 Hz to 1 MHz
	with optional increased bandwidth	1 Hz to 10 MHz

¹ The maximum number of sweep points may vary depending on the number of ports involved in the measurement.


Dynamic range ^{2,3} at all ports		specified	typical
R&S®ZNB T8 (without optional step attenuators)	9 kHz to 100 kHz	≥ 100 dB	122 dB
	100 kHz to 50 MHz	≥ 120 dB	138 dB
	50 MHz to 4 GHz	≥ 130 dB	140 dB
	4 GHz to 7 GHz	≥ 125 dB	138 dB
	7 GHz to 8.5 GHz	≥ 120 dB	130 dB
R&S®ZNB T20	100 kHz to 300 kHz	≥ 95 dB	108 dB
	300 kHz to 1 MHz	≥ 105 dB	120 dB
	1 MHz to 10 MHz	≥ 115 dB	125 dB
	10 MHz to 100 MHz	≥ 120 dB	130 dB
	100 MHz to 9 GHz	≥ 125 dB	135 dB
	9 GHz to 20 GHz	≥ 120 dB	130 dB
R&S®ZNB T26	100 kHz to 1 MHz	≥ 105 dB	120 dB
	1 MHz to 10 MHz	≥ 110 dB	130 dB
	10 MHz to 5 GHz	≥ 120 dB	135 dB
	5 GHz to 10 GHz	≥ 115 dB	125 dB
	10 GHz to 26.5 GHz	≥ 110 dB	120 dB
R&S®ZNB T40	100 kHz to 1 MHz	≥ 105 dB	120 dB
	1 MHz to 10 MHz	≥ 110 dB	130 dB
	10 MHz to 5 GHz	≥ 120 dB	135 dB
	5 GHz to 10 GHz	≥ 115 dB	125 dB
	10 GHz to 30 GHz	≥ 110 dB	120 dB
	30 GHz to 35 GHz	≥ 105 dB	115 dB
	35 GHz to 38 GHz	≥ 100 dB	105 dB
	38 GHz to 40 GHz	≥ 95 dB	100 dB

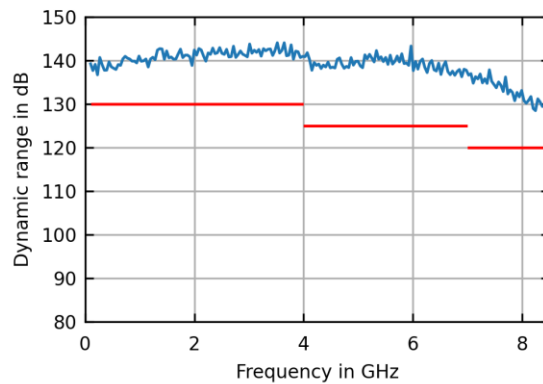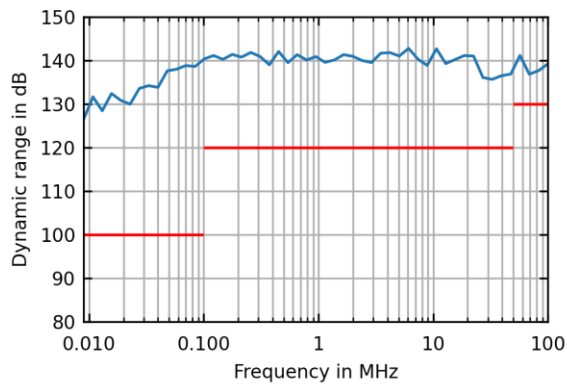



Measured dynamic range in dB versus frequency for the R&S®ZNB T8

² Dynamic range is defined as the difference between the actual maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 10 Hz measurement bandwidth, without system error correction. The dynamic range can be increased by using a measurement bandwidth of 1 Hz. Crosstalk does not limit the dynamic range.


³ Below 100 MHz, dynamic range is typical between adjacent ports on the same horizontal level, e.g. between ports 1 and 2 or 5 and 6. Between 1.5 MHz and 2.5 MHz, dynamic range may be degraded compared to specified value.

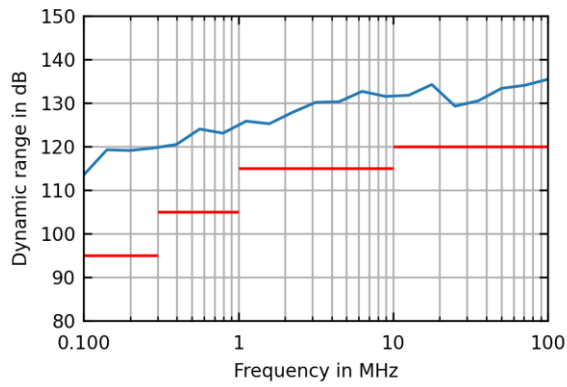

Measured dynamic range in dB versus frequency for the R&S®ZNBT20

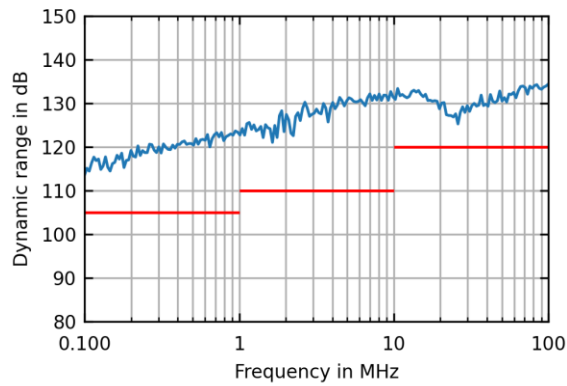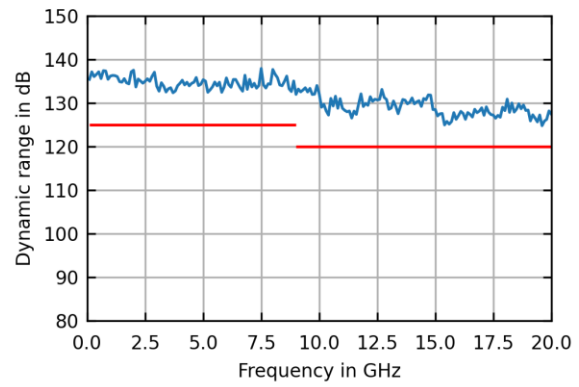


Measured dynamic range in dB versus frequency for the R&S®ZNBT26/R&S®ZNBT40

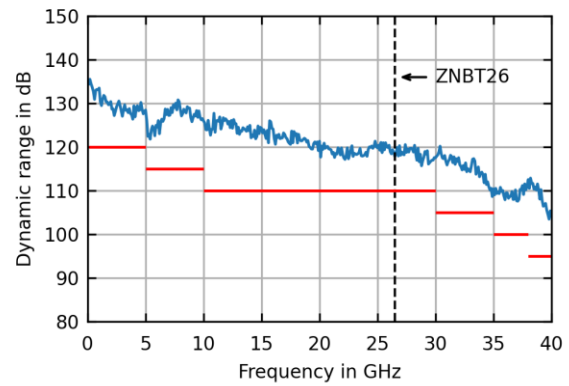

Measurement speed

Measured with firmware version 3.71 and Windows 10 (64 bit).

Measurement time	for 201 measurements points, with 200 MHz span, 1 MHz measurement bandwidth					
		T_{SWEEP}		T_{CYCLE}		
	R&S®ZNB8 ⁴					
	with 900 MHz center frequency	< 2.5 ms		< 5 ms		
	with 5.1 GHz center frequency	< 2.0 ms		< 5 ms		
	R&S®ZNB20					
	with 900 MHz center frequency	< 3 ms		< 7.5 ms		
	with 5.1 GHz center frequency	< 3.5 ms		< 7.5 ms		
	R&S®ZNB26 ⁴					
	with 900 MHz center frequency	< 3.5 ms		< 11 ms		
	with 5.1 GHz center frequency	< 3.5 ms		< 7 ms		
	R&S®ZNB40 ⁴					
with 900 MHz center frequency	< 3.5 ms		< 11 ms			
with 5.1 GHz center frequency	< 3.5 ms		< 7 ms			
Acquisition time per point (T_{ACQ})	1 MHz measurement bandwidth, CW mode	7.5 μ s				
Sampling time per point (T_{SAMPLE}), IF filter: normal	at 1 MHz measurement bandwidth	860 ns				
	at 10 MHz measurement bandwidth	312 ns				
Time for measurement and data transfer (nom.)	for 201 measurements points, with 800 MHz start frequency, 1 GHz stop frequency, 1 MHz measurement bandwidth ⁵	VXI11	HiSLIP	IEC/ IEEE	USB 3.0	
		over 1 Gbit/s LAN				
		R&S®ZNB8 ⁴	4.8 ms	4.3 ms	5.1 ms	4.5 ms
		R&S®ZNB20	6.9 ms	7.3 ms	7.5 ms	6.3 ms
		R&S®ZNB26 ⁴	6.7 ms	6.1 ms	7.1 ms	6.3 ms
		R&S®ZNB40 ⁴	6.7 ms	6.1 ms	7.1 ms	6.3 ms
Data transfer time (nom.)	for 201 measurements points (magnitude)	0.9 ms	1 ms	1.3 ms	0.4 ms	
Switching time between channels or preloaded instrument settings	with a maximum of 2001 points	< 8 ms				

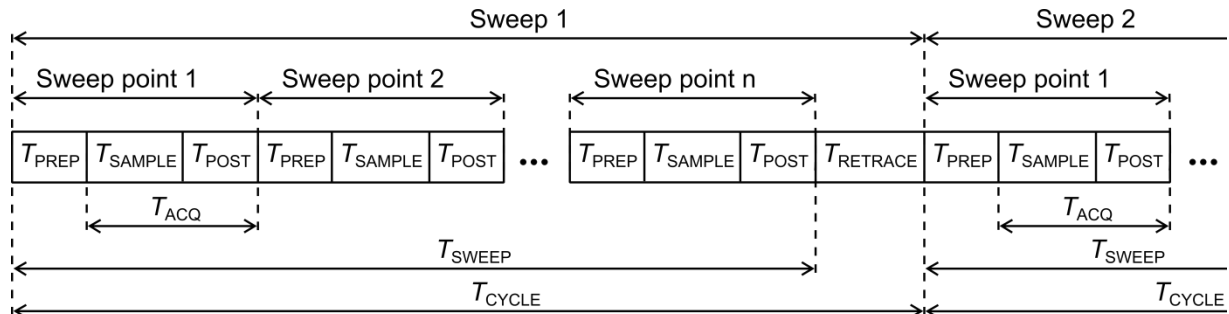

- T_{PREP} Preparation time required to set up the internal hardware components
 T_{SAMPLE} Sampling time (approximately equal to the settling time of the digital filters)
 T_{POST} Time required for hardware postprocessing
 T_{ACQ} Acquisition time ($T_{\text{SAMPLE}} + T_{\text{POST}}$)
 T_{SWEEP} Time required for one sweep
 T_{RETRACE} Time between two sweeps
 T_{CYCLE} Sweep cycle time ($T_{\text{SWEEP}} + T_{\text{RETRACE}}$)

Measurement data acquisition process

⁴ Applies to instruments with serial number > 200000 or equipped with R&S®ZNB8-USY.

⁵ In continuous mode, no additional time for data transfer is needed, as this occurs simultaneously during the measurement.

Measured sweep times in ms versus number of measurement points ⁶ of the R&S®ZNB8⁴					
Number of measurement points	51	201	401	1601	5001
Sweep mode	step	step	step	step	step
800 MHz start frequency, 1 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	1.7	2.5	3.6	9.2	25.4
With 4-port TOSM calibration	3.7	7.1	11.0	36.5	107
With 24-port TOSM calibration	21.7	67.0	131	484	1508
800 MHz start frequency, 1 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	47.7	174	345	1357	4228
With 4-port TOSM calibration	187	694	1376	5426	16901
With 24-port TOSM calibration	1121	4161	8257	32586	101634
1 MHz start frequency, 4.5 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	2.3	3.5	4.7	11.8	31.6
With 4-port TOSM calibration	5.6	10.0	15.3	43.8	122
With 24-port TOSM calibration	35.1	75.2	129	479	1490
1 MHz start frequency, 4.5 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	47.3	176	347	1369	4262
With 4-port TOSM calibration	184	700	1383	5470	17037
With 24-port TOSM calibration	1108	4207	8307	32843	102446
1 MHz start frequency, 8.5 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	2.9	4.2	5.5	12.9	32.3
With 4-port TOSM calibration	8.1	13.4	18.6	47.8	126
With 24-port TOSM calibration	50.0	95.4	146	479	1480
1 MHz start frequency, 8.5 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	47.4	177	349	1374	4268
With 4-port TOSM calibration	187	704	1394	5496	17076
With 24-port TOSM calibration	1116	4228	8378	32999	102644

Measured sweep times in ms versus number of measurement points ⁶ of the R&S®ZNB20⁷					
Number of measurement points	51	201	401	1601	5001
Sweep mode	step	step	step	step	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	3.0	3.8	5.4	12.1	31.8
With 4-port TOSM calibration	7.3	11.8	18.4	54.8	156
With 24-port TOSM calibration	41.9	84.4	147	492	1568
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	48.8	175	345	1362	4241
With 4-port TOSM calibration	190	697	1376	5444	16960
With 24-port TOSM calibration	1135	4177	8255	32696	101976
1 MHz start frequency, 20 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	8.1	10.1	12.1	23.9	55.8
With 4-port TOSM calibration	27.2	35.4	43.6	90.7	218
With 24-port TOSM calibration	159	221	291	705	2044
1 MHz start frequency, 20 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	53.1	183	352	1379	4280
With 4-port TOSM calibration	208	728	1406	5510	17118
With 24-port TOSM calibration	1238	4361	8429	33096	103061

⁶ Sweep time is to be understood as cycle time; static frequency accuracy of the instrument applies; measured with LPW11 controller.

⁷ Not valid for discontinued R&S®ZNB20 model (order no.: 1332.9002.24). See section "R&S®ZNB-USY" for measured sweep times.

Measured sweep times in ms versus number of measurement points ⁶ of the R&S®ZNB26 ⁴

Number of measurement points	51	201	401	1601	5001
Sweep mode	step	step	step	step	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	3.0	3.9	5.1	11.9	31.5
With 4-port TOSM calibration	7.8	12.4	18.4	54.2	156
With 24-port TOSM calibration	43.2	87.6	144	480	1543
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	48.8	176	345	1362	4241
With 4-port TOSM calibration	191	700	1377	5443	16959
With 24-port TOSM calibration	1136	4190	8259	32673	101957
1 MHz start frequency, 26.5 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	12.6	14.4	16.6	28.3	60.2
With 4-port TOSM calibration	45.5	52.7	61.3	108	236
With 24-port TOSM calibration	267	321	390	797	2138
1 MHz start frequency, 26.5 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	56.1	185	356	1375	4263
With 4-port TOSM calibration	219	737	1420	5495	17048
With 24-port TOSM calibration	1307	4407	8510	32988	102606

Measured sweep times in ms versus number of measurement points ⁶ of the R&S®ZNB40 ⁴

Number of measurement points	51	201	401	1601	5001
Sweep mode	step	step	step	step	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	3.0	4.0	5.2	11.9	31.6
With 4-port TOSM calibration	7.9	12.4	18.4	54.3	156
With 24-port TOSM calibration	43.3	87.4	144	482	1541
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	48.8	176	345	1362	4241
With 4-port TOSM calibration	191	700	1377	5443	16958
With 24-port TOSM calibration	1135	4191	8257	32674	101955
1 MHz start frequency, 40 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	13.7	16.5	18.9	30.6	62.5
With 4-port TOSM calibration	50.0	61.6	71.3	118	245
With 24-port TOSM calibration	295	372	448	851	2175
1 MHz start frequency, 40 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	58.1	190	360	1377	4248
With 4-port TOSM calibration	227	757	1436	5508	16990
With 24-port TOSM calibration	1358	4524	8603	33063	102256



Measurement accuracy

R&S®ZNB T8

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZV-Z270 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). At limit branches the tighter value is applicable.

Uncertainty of transmission measurements		Magnitude	Phase
> 9 kHz to 100 kHz	+0 dB to –35 dB	0.07 dB	0.6°
	–35 dB to –50 dB	0.12 dB	1.0°
	–50 dB to –60 dB	0.32 dB	2.3°
> 100 kHz to 8.5 GHz	+0 dB to –35 dB	0.06 dB	0.6°
	–35 dB to –50 dB	0.09 dB	0.9°
	–50 dB to –60 dB	0.19 dB	1.5°



Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of –10 dBm.

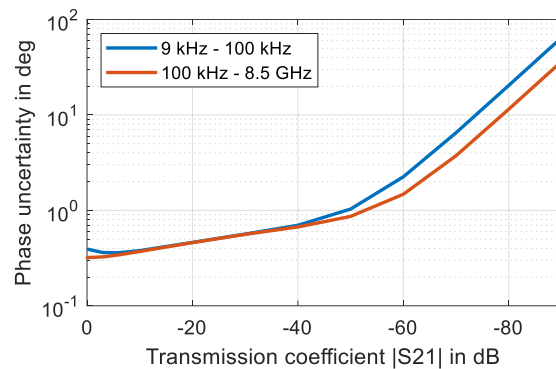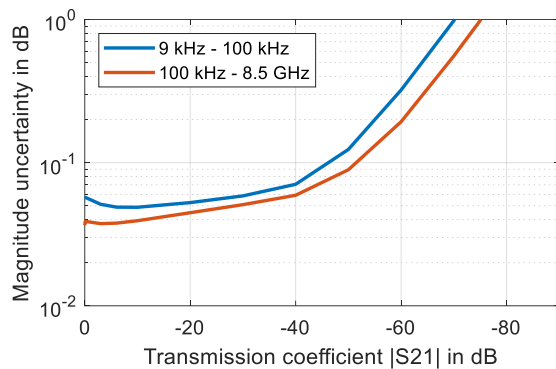

Uncertainty of transmission magnitude and transmission phase measurements for the R&S®ZNB T8 in the frequency range from 9 kHz to 8.5 GHz; analysis conditions: $S_{11} = S_{22} = 0$, calibrated power: –10 dBm, measured power: –10 dBm

Uncertainty of reflection measurements	Logarithmic			Linear	
	Reflection level	Magnitude	Phase	Reflection range	Magnitude
9 kHz to 2 GHz	0 dB	0.1 dB	0.6°	0 dB to –15 dB	0.010
	–15 dB	0.2 dB	1.5°	–15 dB to –25 dB	0.005
	–25 dB	0.7 dB	5.6°	–25 dB to –35 dB	0.005
> 2 GHz to 8.5 GHz	0 dB	0.1 dB	0.9°	0 dB to –15 dB	0.015
	–15 dB	0.3 dB	2.0°	–15 dB to –25 dB	0.007
	–25 dB	1.0 dB	7.5°	–25 dB	0.007

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of –10 dBm.

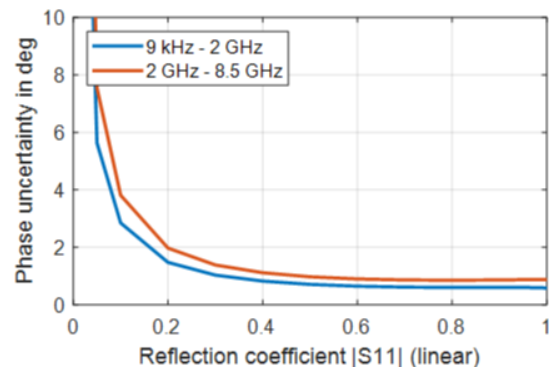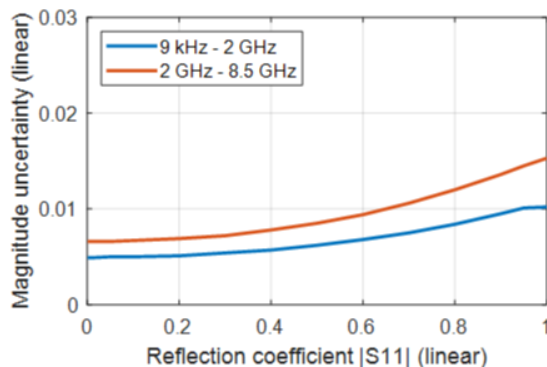


Uncertainty of reflection magnitude and reflection phase measurements for the R&S®ZNB T8 in the frequency range from 9 kHz to 8.5 GHz; analysis conditions: $S_{12} = S_{21} = 0$, calibrated power: –10 dBm, measured power: –10 dBm

R&S®ZNBT20

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZV-Z235 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

Uncertainty of transmission measurements		Magnitude	Phase
100 kHz to 10 MHz	0 dB to –20 dB	0.04 dB	0.4°
	–20 dB to –40 dB	0.11 dB	0.9°
	–40 dB to –50 dB	0.32 dB	2.2°
	–50 dB to –60 dB	0.98 dB	6.5°
> 10 MHz to 10 GHz	0 dB to –20 dB	0.05 dB	0.5°
	–20 dB to –40 dB	0.06 dB	0.7°
	–40 dB to –50 dB	0.09 dB	0.9°
	–50 dB to –60 dB	0.19 dB	1.5°
> 10 GHz to 20 GHz	0 dB to –20 dB	0.05 dB	0.7°
	–20 dB to –40 dB	0.07 dB	0.8°
	–40 dB to –50 dB	0.10 dB	1.0°
	–50 dB to –60 dB	0.24 dB	1.8°



Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of –10 dBm.

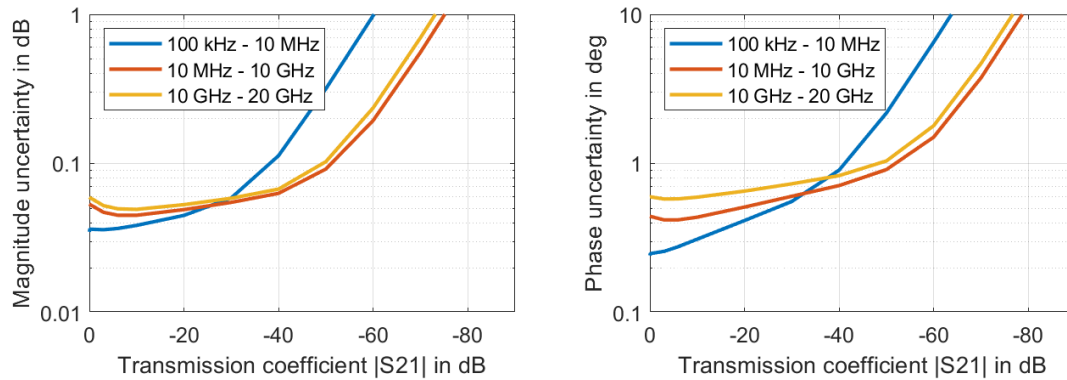

Typical uncertainty of transmission magnitude and transmission phase measurements for the R&S®ZNBT20 in the frequency range from 100 kHz to 20 GHz; analysis conditions: $S_{11} = S_{22} = 0$, calibrated power: –10 dBm, measured power: –10 dBm

Uncertainty of reflection measurements	Logarithmic			Linear	
	Reflection level	Magnitude	Phase	Reflection range	Magnitude
100 kHz to 10 GHz	0 dB	0.10 dB	0.7°	0 dB to -15 dB	0.013
	-15 dB	0.30 dB	2.0°	-15 dB to -25 dB	0.007
	-25 dB	1.00 dB	7.7°	-25 dB to -35 dB	0.007
> 10 GHz to 20 GHz	0 dB	0.20 dB	1.1°	0 dB to -15 dB	0.019
	-15 dB	0.40 dB	2.4°	-15 dB to -25 dB	0.008
	-25 dB	1.20 dB	9.1°	-25 dB to -35 dB	0.008

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

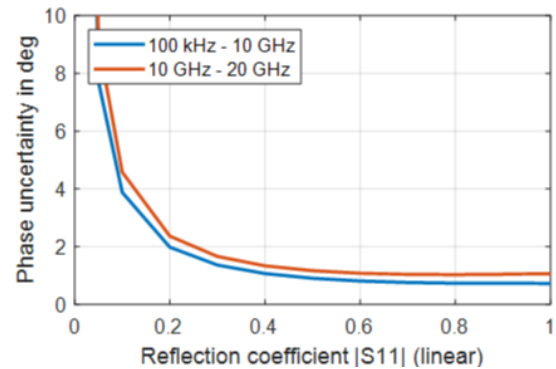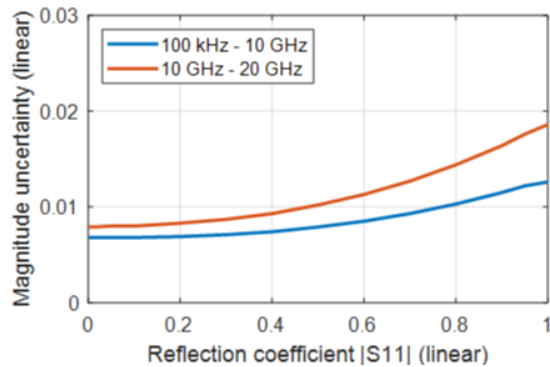



Uncertainty of reflection magnitude and reflection phase measurements for the R&S®ZNB20 in the frequency range from 100 kHz to 20 GHz; analysis conditions: $S_{12} = S_{21} = 0$, calibrated power: -10 dBm, measured power: -10 dBm

R&S®ZNB26 and R&S®ZNB40

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 °C since calibration. Validity of the data is conditional on the use of an R&S®ZV-Z229 calibration kit. This calibration kit is used to achieve the effective system data specified below. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed).

Uncertainty of transmission measurements		Magnitude	Phase
100 kHz to 200 MHz	0 dB to –35 dB	0.06 dB	0.6°
	–35 dB to –50 dB	0.09 dB	0.9°
	–50 dB to –60 dB	0.19 dB	1.5°
> 200 MHz to 10 GHz	0 dB to –35 dB	0.06 dB	0.7°
	–35 dB to –50 dB	0.10 dB	1.0°
	–50 dB to –60 dB	0.23 dB	1.7°
> 10 GHz to 20 GHz	0 dB to –35 dB	0.06 dB	0.8°
	–35 dB to –50 dB	0.10 dB	1.1°
	–50 dB to –60 dB	0.24 dB	1.8°
> 20 GHz to 35 GHz	0 dB to –35 dB	0.07 dB	1.2°
	–35 dB to –50 dB	0.13 dB	1.5°
	–50 dB to –60 dB	0.32 dB	2.5°
> 35 GHz to 40 GHz	0 dB to –35 dB	0.10 dB	1.3°
	–35 dB to –50 dB	0.32 dB	2.5°
	–50 dB to –60 dB	0.98 dB	6.6°



Specifications are based on a matched DUT, a measurement bandwidth of 10 Hz and a nominal source power of –10 dBm.

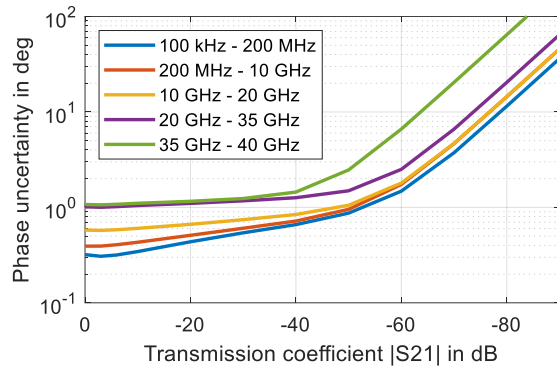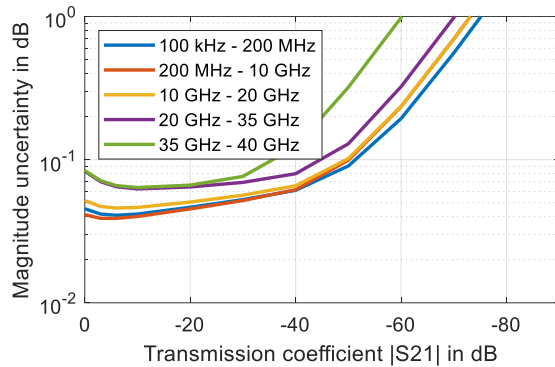

Uncertainty of transmission magnitude and transmission phase measurements for the R&S®ZNB26 and R&S®ZNB40 in the frequency range from 100 kHz to 40 GHz; analysis conditions: $S_{11} = S_{22} = 0$, calibrated power: –10 dBm, measured power: –10 dBm

Uncertainty of reflection measurements	Logarithmic			Linear	
	Reflection level	Magnitude	Phase	Reflection range	Magnitude
100 kHz to 10 GHz	0 dB	0.10 dB	0.7°	0 dB to -15 dB	0.012
	-15 dB	0.29 dB	1.7°	-15 dB to -25 dB	0.006
	-25 dB	0.88 dB	6.6°	-25 dB to -35 dB	0.006
> 10 GHz to 20 GHz	0 dB	0.17 dB	1.1°	0 dB to -15 dB	0.020
	-15 dB	0.48 dB	2.7°	-15 dB to -25 dB	0.010
	-25 dB	1.29 dB	11°	-25 dB to -35 dB	0.009
> 20 GHz to 40 GHz	0 dB	0.24 dB	1.6°	0 dB to -15 dB	0.028
	-15 dB	0.61 dB	3.7°	-15 dB to -25 dB	0.013
	-25 dB	1.81 dB	14°	-25 dB to -35 dB	0.013

Specifications are based on an isolating DUT, a measurement bandwidth of 10 Hz and a nominal source power of -10 dBm.

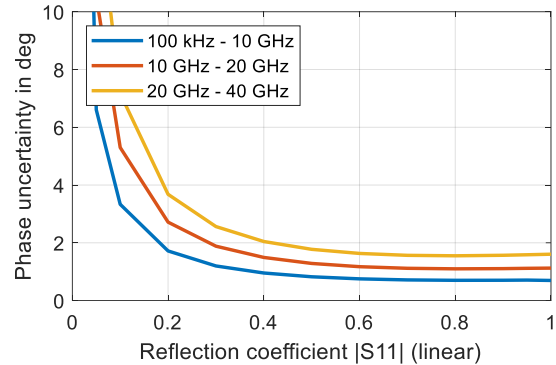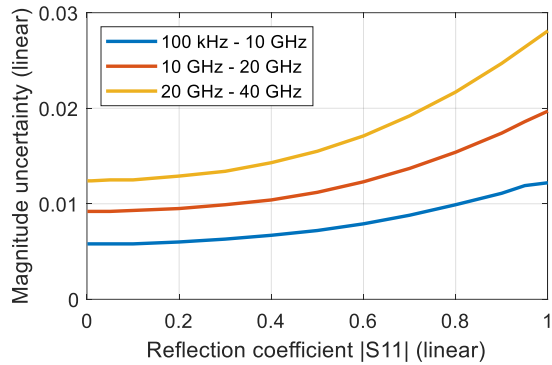

Uncertainty of reflection magnitude and reflection phase measurements for the R&S®ZNBT26 and R&S®ZNBT40 in the frequency range from 100 kHz to 40 GHz; analysis conditions: $S_{11} = S_{22} = 0$, calibrated power: -10 dBm, measured power: -10 dBm

Effective system data

This data is valid between +18 °C and +28 °C, provided the temperature has not varied by more than 1 K since calibration. Frequency points, measurement bandwidth and sweep time have to be identical for measurement and calibration (no interpolation allowed). The data is based on a measurement bandwidth of 10 Hz and a source power of –10 dBm.

R&S®ZNBT8, calibrated using R&S®ZV-Z270	9 kHz to 100 kHz	100 kHz to 4.5 GHz	4.5 GHz to 8.5 GHz
Directivity	≥ 46 dB	≥ 45 dB	≥ 40 dB
Source match	≥ 41 dB	≥ 40 dB	≥ 36 dB
Load match	≥ 44 dB	≥ 45 dB	≥ 40 dB
Reflection tracking	≤ 0.02 dB	≤ 0.02 dB	≤ 0.05 dB
Transmission tracking	≤ 0.028 dB	≤ 0.018 dB	≤ 0.09 dB

R&S®ZNBT20, calibrated using R&S®ZN-Z235	100 kHz to 10 GHz	10 GHz to 20 GHz
Directivity	≥ 46 dB	≥ 43 dB
Source match	≥ 43 dB	≥ 38 dB
Load match	≥ 45 dB	≥ 42 dB
Reflection tracking	≤ 0.05 dB	≤ 0.05 dB
Transmission tracking	≤ 0.03 dB	≤ 0.03 dB

R&S®ZNBT26, calibrated using R&S®ZV-Z229	10 MHz to 700 MHz	700 MHz to 24 GHz	24 GHz to 26.5 GHz
Directivity	≥ 33 dB	≥ 38 dB	≥ 33 dB
Source match	≥ 30 dB	≥ 36 dB	≥ 30 dB
Load match	≥ 33 dB	≥ 38 dB	≥ 33 dB
Reflection tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB
Transmission tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB

For an R&S®ZV-Z229 calibration kit that has been characterized with a DAkkS-accredited calibration, the following data is valid:

R&S®ZNBT26, calibrated using R&S®ZV-Z229	100 kHz to 4 GHz	4 GHz to 20 GHz	20 GHz to 26.5 GHz
Directivity	≥ 42 dB	≥ 38 dB	≥ 36 dB
Source match	≥ 38 dB	≥ 35 dB	≥ 33 dB
Load match	≥ 42 dB	≥ 38 dB	≥ 36 dB
Reflection tracking	≤ 0.05 dB	≤ 0.05 dB	≤ 0.08 dB
Transmission tracking	≤ 0.02 dB	≤ 0.03 dB	≤ 0.06 dB

R&S®ZNBT40, calibrated using R&S®ZV-Z229	10 MHz to 700 MHz	700 MHz to 24 GHz	24 GHz to 40 GHz
Directivity	≥ 33 dB	≥ 38 dB	≥ 33 dB
Source match	≥ 30 dB	≥ 36 dB	≥ 30 dB
Load match	≥ 33 dB	≥ 38 dB	≥ 33 dB
Reflection tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB
Transmission tracking	≤ 0.2 dB	≤ 0.1 dB	≤ 0.2 dB



For an R&S®ZV-Z229 calibration kit that has been characterized with a DAkkS-accredited calibration, the following data is valid:

R&S®ZNBT40, calibrated using R&S®ZV-Z229	100 kHz to 4 GHz	4 GHz to 20 GHz	20 GHz to 40 GHz
Directivity	≥ 42 dB	≥ 38 dB	≥ 36 dB
Source match	≥ 38 dB	≥ 35 dB	≥ 33 dB
Load match	≥ 42 dB	≥ 38 dB	≥ 36 dB
Reflection tracking	≤ 0.05 dB	≤ 0.05 dB	≤ 0.08 dB
Transmission tracking	≤ 0.02 dB	≤ 0.03 dB	≤ 0.06 dB

Factory-calibrated system data


Data is valid between +18 °C and +28 °C. The data is based on a measurement bandwidth of 1 kHz and a source power of –10 dBm.

		specified	typical
Directivity	9 kHz to 50 kHz	≥ 20 dB	35 dB
	50 kHz to 10 GHz	≥ 30 dB	50 dB
	10 GHz to 20 GHz	≥ 25 dB	35 dB
	20 GHz to 35 GHz	≥ 20 dB	35 dB
	35 GHz to 40 GHz	≥ 15 dB	30 dB
Source match	9 kHz to 50 kHz	≥ 20 dB	35 dB
	50 kHz to 10 GHz	≥ 30 dB	50 dB
	10 GHz to 20 GHz	≥ 25 dB	35 dB
	20 GHz to 35 GHz	≥ 20 dB	35 dB
	35 GHz to 40 GHz	≥ 15 dB	30 dB
Reflection tracking	9 kHz to 40 GHz	≤ 0.5 dB	0.1 dB
Transmission tracking	9 kHz to 40 GHz	≤ 0.5 dB ⁸	0.1 dB
Load match			
R&S®ZNBT8	9 kHz to 50 kHz	≥ 10 dB	15 dB
	50 kHz to 8.5 GHz	≥ 20 dB	25 dB
R&S®ZNBT20	100 kHz to 1 MHz	≥ 16 dB	30 dB
	1 MHz to 100 MHz	≥ 20 dB	35 dB
	100 MHz to 10 GHz	≥ 12 dB	16 dB
	10 GHz to 20 GHz	≥ 10 dB	14 dB
R&S®ZNBT26	100 kHz to 300 kHz	≥ 12 dB	15 dB
	300 kHz to 10 MHz	≥ 15 dB	18 dB
	10 MHz to 20 GHz	≥ 18 dB	22 dB
	20 GHz to 26.5 GHz	≥ 14 dB	18 dB
R&S®ZNBT40	100 kHz to 300 kHz	≥ 12 dB	15 dB
	300 kHz to 10 MHz	≥ 15 dB	18 dB
	10 MHz to 20 GHz	≥ 18 dB	22 dB
	20 GHz to 40 GHz	≥ 14 dB	18 dB

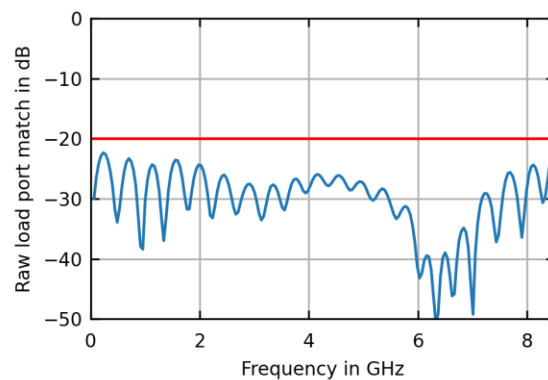
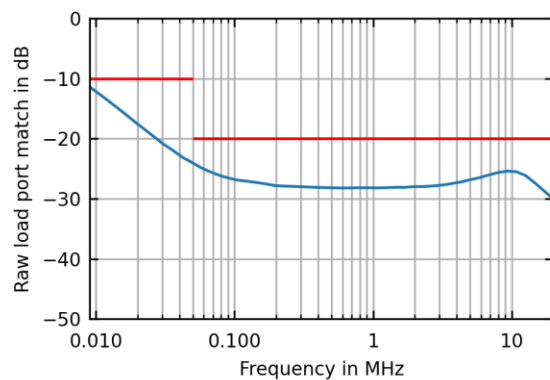


Measured raw load port match versus frequency for the R&S®ZNBT8


⁸ Below 200 kHz, factory-calibrated transmission tracking of the R&S®ZNBT20, R&S®ZNBT26 and R&S®ZNBT40 is ≤ 0.7 dB.

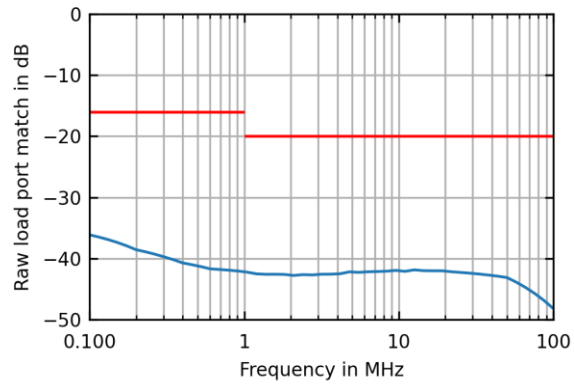

Measured raw load port match versus frequency for the R&S®ZNBT20

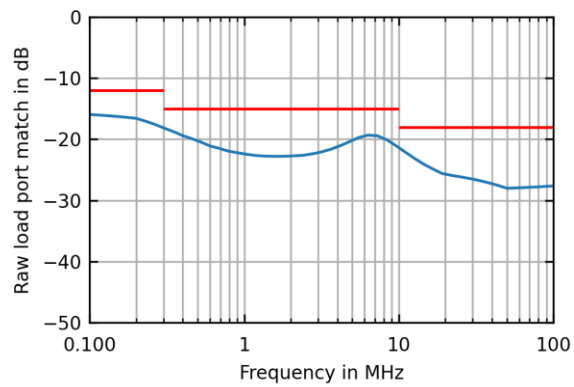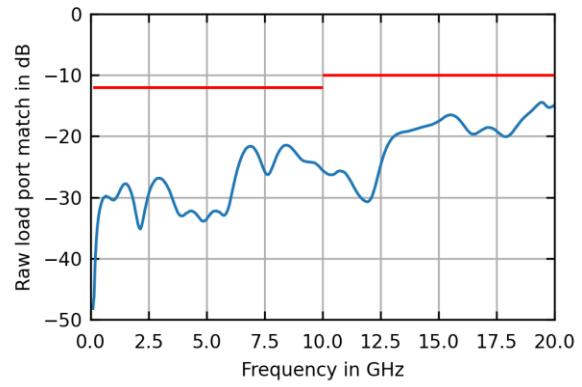

Measured raw load port match versus frequency for the R&S®ZNBT26 and R&S®ZNBT40

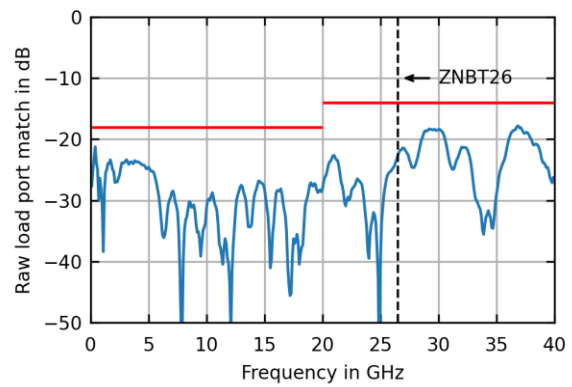

Trace stability				
		IF bandwidth	specified	typical
Trace noise magnitude (RMS)				
R&S®ZNBT8	at 0 dBm source power, 0 dB reflection			
	100 kHz to 100 MHz	10 kHz	≤ 0.004 dB	0.001 dB
	100 MHz to 8.5 GHz	10 kHz	≤ 0.004 dB	0.002 dB
R&S®ZNBT20	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.006 dB	0.002 dB
	300 kHz to 20 GHz	10 kHz	≤ 0.004 dB ⁹	0.001 dB
R&S®ZNBT26	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.008 dB	0.002 dB
	300 kHz to 20 GHz	10 kHz	≤ 0.004 dB ⁹	0.002 dB
	20 GHz to 26.5 GHz	10 kHz	≤ 0.006 dB	0.003 dB
R&S®ZNBT40	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	≤ 0.008 dB	0.002 dB
	300 kHz to 20 GHz	10 kHz	≤ 0.004 dB ⁹	0.002 dB
	20 GHz to 35 GHz	10 kHz	≤ 0.006 dB	0.003 dB
	35 GHz to 40 GHz	10 kHz	≤ 0.008 dB	0.005 dB
Trace noise phase (RMS)				
R&S®ZNBT8	at 0 dBm source power, 0 dB reflection			
	100 kHz to 100 MHz	10 kHz	$\leq 0.035^\circ$	0.005°
	100 MHz to 8.5 GHz	10 kHz	$\leq 0.035^\circ$	0.020°
R&S®ZNBT20	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	$\leq 0.050^\circ$	0.015°
	300 kHz to 20 GHz	10 kHz	$\leq 0.035^\circ$ ⁹	0.01°
R&S®ZNBT26	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	$\leq 0.07^\circ$	0.02°
	300 kHz to 20 GHz	10 kHz	$\leq 0.035^\circ$ ⁹	0.015°
	20 GHz to 26.5 GHz	10 kHz	$\leq 0.05^\circ$	0.02°
R&S®ZNBT40	at 0 dBm source power, 0 dB reflection			
	100 kHz to 300 kHz	10 kHz	$\leq 0.07^\circ$	0.02°
	300 kHz to 20 GHz	10 kHz	$\leq 0.035^\circ$ ⁹	0.015°
	20 GHz to 35 GHz	10 kHz	$\leq 0.05^\circ$	0.02°
	35 GHz to 40 GHz	10 kHz	$\leq 0.08^\circ$	0.04°
Temperature dependence				
	at 0 dB transmission or reflection			measured
	9 kHz to 4.5 GHz	magnitude		0.01 dB/K
		phase		0.15°/K
	4.5 GHz to 20 GHz	magnitude		0.04 dB/K
		phase		0.80°/K
	20 GHz to 40 GHz	magnitude		0.08 dB/K
		phase		1.60°/K

⁹ From 1.5 MHz to 2.5 MHz, trace noise magnitude and phase may exceed the specified value.


Test port output

Data is valid from +18 °C to +28 °C.



Power range	specified	typical
R&S®ZNBT8	without R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	9 kHz to 100 MHz	–55 dBm to +10 dBm up to +12 dBm
	100 MHz to 2.5 GHz	–55 dBm to +13 dBm up to +15 dBm
	2.5 GHz to 7.5 GHz	–55 dBm to +10 dBm up to +13 dBm
	7.5 GHz to 8.5 GHz	–55 dBm to +8 dBm up to +12 dBm
	with R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	9 kHz to 100 kHz	–75 dBm to +10 dBm up to +12 dBm
	100 kHz to 100 MHz	–85 dBm to +10 dBm up to +12 dBm
	100 MHz to 2.5 GHz	–85 dBm to +13 dBm up to +15 dBm
	2.5 GHz to 7.5 GHz	–85 dBm to +10 dBm up to +13 dBm
	7.5 GHz to 8.5 GHz	–85 dBm to +8 dBm up to +12 dBm
R&S®ZNBT20	without R&S®ZNBT20-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	100 kHz to 10 GHz	–30 dBm to +12 dBm up to +15 dBm
	10 GHz to 20 GHz	–30 dBm to +8 dBm up to +11 dBm
	with R&S®ZNBT20-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	100 kHz to 10 GHz	–60 dBm to +12 dBm up to +15 dBm
	10 GHz to 20 GHz	–60 dBm to +8 dBm up to +11 dBm
R&S®ZNBT26	without R&S®ZNBT26-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	100 kHz to 200 kHz	–30 dBm to +7 dBm up to +10 dBm
	200 kHz to 1 GHz	–30 dBm to +8 dBm up to +11 dBm
	1 GHz to 10 GHz	–30 dBm to +7 dBm up to +10 dBm
	10 GHz to 15 GHz	–30 dBm to +6 dBm up to +8 dBm
	15 GHz to 20 GHz	–30 dBm to +5 dBm up to +7 dBm
	20 GHz to 26.5 GHz	–30 dBm to 0 dBm up to +4 dBm
	with R&S®ZNBT26-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	100 kHz to 200 kHz	–60 dBm to +7 dBm up to +10 dBm
	200 kHz to 1 GHz	–60 dBm to +8 dBm up to +11 dBm
	1 GHz to 10 GHz	–60 dBm to +7 dBm up to +10 dBm
	10 GHz to 15 GHz	–60 dBm to +6 dBm up to +8 dBm
	15 GHz to 20 GHz	–60 dBm to +5 dBm up to +7 dBm
	20 GHz to 26.5 GHz	–60 dBm to 0 dBm up to +4 dBm
R&S®ZNBT40	without R&S®ZNBT40-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	100 kHz to 200 kHz	–30 dBm to +7 dBm up to +10 dBm
	200 kHz to 1 GHz	–30 dBm to +8 dBm up to +11 dBm
	1 GHz to 10 GHz	–30 dBm to +7 dBm up to +10 dBm
	10 GHz to 15 GHz	–30 dBm to +6 dBm up to +8 dBm
	15 GHz to 20 GHz	–30 dBm to +5 dBm up to +7 dBm
	20 GHz to 30 GHz	–30 dBm to 0 dBm up to +4 dBm
	30 GHz to 40 GHz	–30 dBm to –2 dBm up to +2 dBm
	with R&S®ZNBT40-B21/-B22/-B23/-B24/-B25/-B26 extended power range option	
	100 kHz to 200 kHz	–60 dBm to +7 dBm up to +10 dBm
	200 kHz to 1 GHz	–60 dBm to +8 dBm up to +11 dBm
	1 GHz to 10 GHz	–60 dBm to +7 dBm up to +10 dBm
	10 GHz to 15 GHz	–60 dBm to +6 dBm up to +8 dBm
	15 GHz to 20 GHz	–60 dBm to +5 dBm up to +7 dBm
	20 GHz to 30 GHz	–60 dBm to 0 dBm up to +4 dBm
	30 GHz to 40 GHz	–60 dBm to –2 dBm up to +2 dBm

Power accuracy			
R&S®ZNBT8	source power –10 dBm		
	9 kHz to 50 kHz		≤ 3 dB
	50 kHz to 8.5 GHz		≤ 2 dB
R&S®ZNBT20	source power –10 dBm		
	100 kHz to 10 GHz		≤ 2 dB
	10 GHz to 20 GHz		≤ 3 dB
R&S®ZNBT26	source power –10 dBm		
	100 kHz to 20 GHz		≤ 3 dB
	20 GHz to 26.5 GHz		≤ 5 dB
R&S®ZNBT40	source power –10 dBm		
	100 kHz to 20 GHz		≤ 3 dB
	20 GHz to 40 GHz		≤ 5 dB
Power linearity			
R&S®ZNBT8	referenced to –10 dBm		
	source power ≥ –55 dBm		
	100 kHz to 8.5 GHz		≤ 1 dB
	source power < –55 dBm		
	100 kHz to 8.5 GHz		≤ 2 dB
R&S®ZNBT20	referenced to –10 dBm		
	source power ≥ –30 dBm		
	10 MHz to 20 GHz		≤ 1 dB
	source power < –30 dBm		
	10 MHz to 20 GHz		≤ 2 dB
R&S®ZNBT26	referenced to –10 dBm		
	source power ≥ –60 dBm		
	10 MHz to 15 GHz		≤ 1 dB
	15 GHz to 26.5 GHz		≤ 1.5 dB
R&S®ZNBT40	referenced to –10 dBm		
	source power ≥ –60 dBm		
	10 MHz to 15 GHz		≤ 1 dB
	15 GHz to 40 GHz		≤ 1.5 dB
Power resolution			0.01 dB



Harmonics		specified	typical
R&S®ZNBT8	at 0 dBm		
	20 kHz to 100 MHz	≤ –20 dBc	–30 dBc
	100 MHz to 8.5 GHz	≤ –25 dBc	–35 dBc
R&S®ZNBT20	at 0 dBm		
	100 kHz to 10 MHz	≤ –15 dBc	–25 dBc
	10 MHz to 100 MHz	≤ –20 dBc	–30 dBc
	100 MHz to 20 GHz	≤ –25 dBc	–35 dBc
R&S®ZNBT26	at 0 dBm		
	100 kHz to 10 MHz	≤ –15 dBc	–30 dBc
	10 MHz to 100 MHz	≤ –20 dBc	–35 dBc
	100 MHz to 10 GHz	≤ –22 dBc	–30 dBc
	10 GHz to 15 GHz	≤ –18 dBc	–25 dBc
	at –5 dBm		
	15 GHz to 18 GHz	≤ –18 dBc	–25 dBc
	18 GHz to 26.5 GHz	≤ –14 dBc	–20 dBc
R&S®ZNBT40	at 0 dBm		
	100 kHz to 10 MHz	≤ –15 dBc	–30 dBc
	10 MHz to 100 MHz	≤ –20 dBc	–35 dBc
	100 MHz to 10 GHz	≤ –22 dBc	–30 dBc
	10 GHz to 15 GHz	≤ –18 dBc	–25 dBc
	at –5 dBm		
	15 GHz to 18 GHz	≤ –18 dBc	–25 dBc
	18 GHz to 40 GHz	≤ –14 dBc	–20 dBc

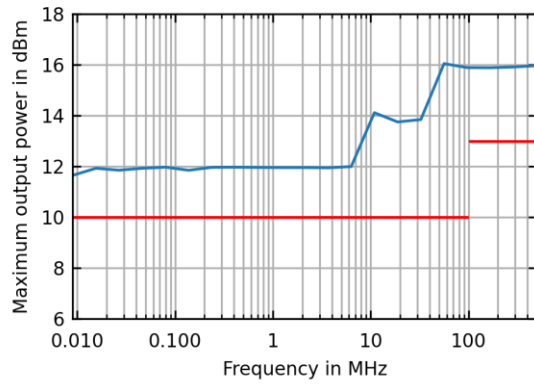


Measured maximum output power in dBm versus frequency for the R&S®ZNBT8

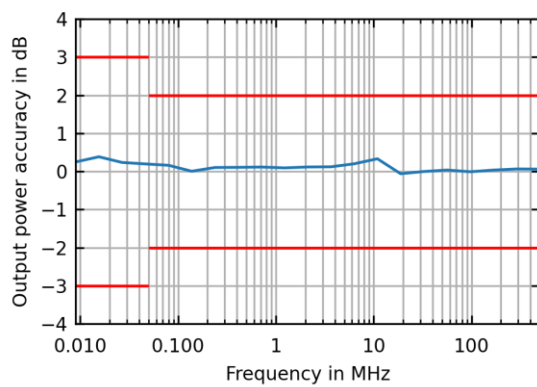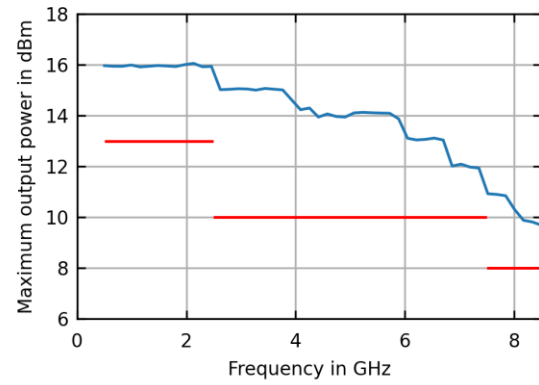


Measured output power accuracy in dB versus frequency for the R&S®ZNBT8

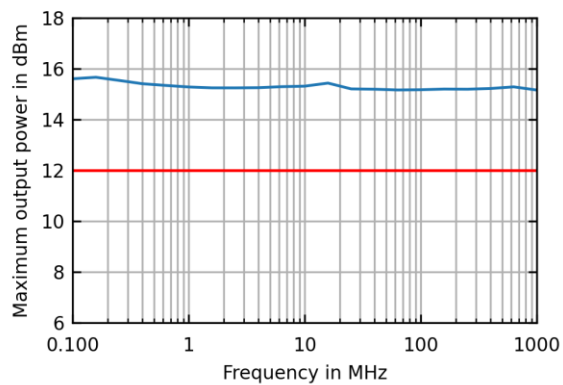
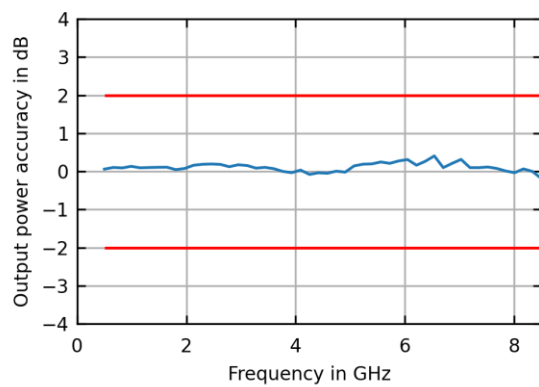


Measured maximum output power in dBm versus frequency for the R&S®ZNBT20


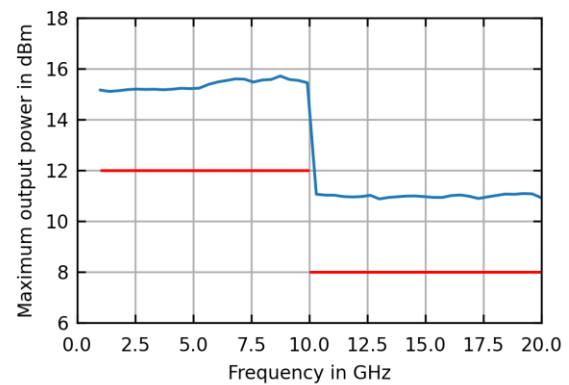


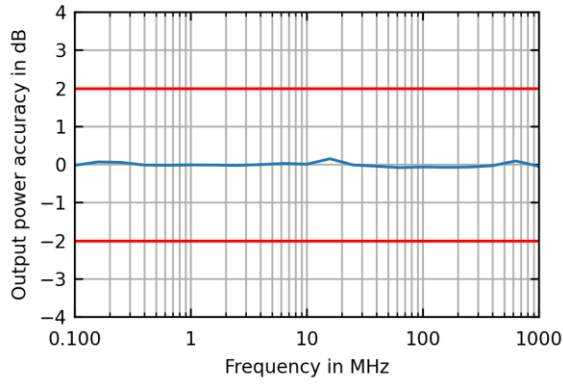


Measured output power accuracy in dB versus frequency for the R&S®ZNB20

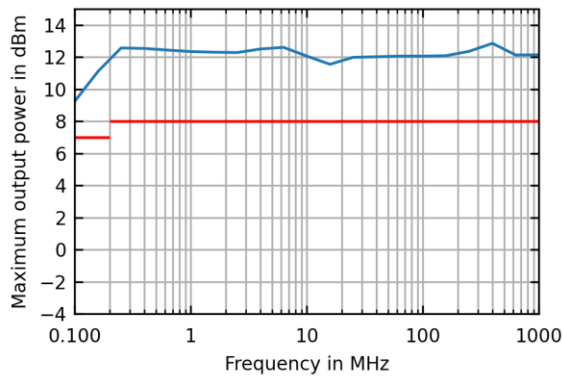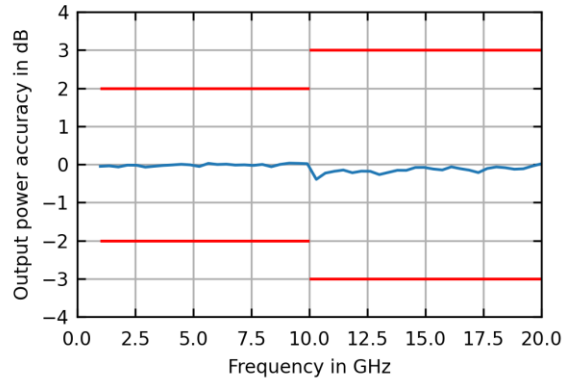

Measured maximum output power in dBm versus frequency for the R&S®ZNB26 and R&S®ZNB40

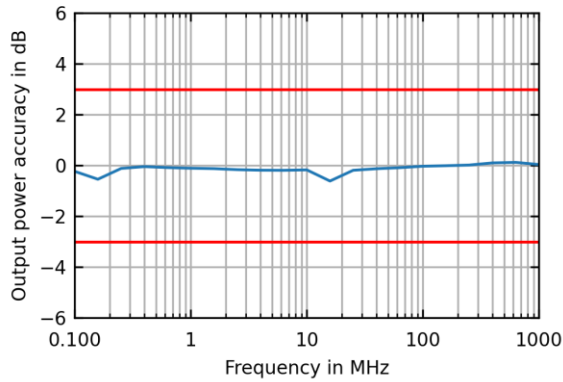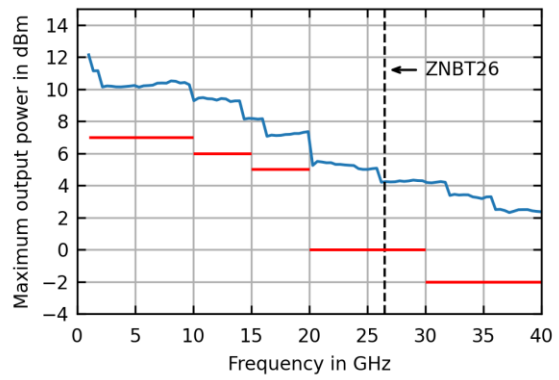

Measured output power accuracy in dB versus frequency for the R&S®ZNB26 and R&S®ZNB40

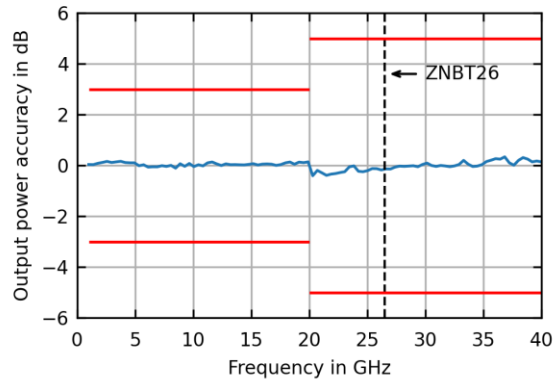

Test port input

Match	without system error correction	
	R&S®ZNBT8	
	9 kHz to 50 kHz	> 10 dB
	50 kHz to 8.5 GHz	> 20 dB
	R&S®ZNBT20	
	100 kHz to 1 MHz	> 16 dB
	1 MHz to 100 MHz	> 20 dB
	100 MHz to 10 GHz	> 12 dB
	10 GHz to 20 GHz	> 10 dB
	R&S®ZNBT26	
	100 kHz to 300 kHz	> 12 dB
	300 kHz to 10 MHz	> 15 dB
	10 MHz to 20 GHz	> 18 dB
	20 GHz to 26.5 GHz	> 15 dB
	R&S®ZNBT40	
	100 kHz to 300 kHz	> 12 dB
	300 kHz to 10 MHz	> 15 dB
	10 MHz to 20 GHz	> 18 dB
	20 GHz to 40 GHz	> 15 dB
Maximum nominal input level		+13 dBm (nom.)
Power measurement accuracy at –10 dBm without power calibration	R&S®ZNBT8	
	9 kHz to 100 kHz	< 2 dB
	100 kHz to 8.5 GHz	< 1 dB
	R&S®ZNBT20	
	100 kHz to 20 GHz	< 1 dB ¹⁰
	R&S®ZNBT26	
	100 kHz to 20 GHz	< 1 dB ¹⁰
	20 GHz to 26.5 GHz	< 1.5 dB
	R&S®ZNBT40	
	100 kHz to 20 GHz	< 1 dB ¹⁰
	20 GHz to 40 GHz	< 1.5 dB
Receiver linearity referenced to –10 dBm	R&S®ZNBT8	
	for +20 dB to +10 dB	
	9 kHz to 7.5 GHz	< 0.2 dB
	for +18 dB to +10 dB	
	7.5 GHz to 8.5 GHz	< 0.2 dB
	for +10 dB to –40 dB	
	9 kHz to 8.5 GHz	< 0.1 dB
	R&S®ZNBT20	
	for +20 dB to +10 dB	
	100 kHz to 10 GHz	< 0.3 dB
	for +18 dB to +10 dB	
	10 GHz to 20 GHz	< 0.3 dB
	for +10 dB to –40 dB	
	100 kHz to 20 GHz	< 0.1 dB
	R&S®ZNBT26	
	for +15 dB to +10 dB	
	100 kHz to 20 GHz	< 0.2 dB
	for +10 dB to –40 dB	
	100 kHz to 26.5 GHz	< 0.1 dB
	R&S®ZNBT40	
	for +15 dB to +10 dB	
	100 kHz to 20 GHz	< 0.2 dB
	for +10 dB to –40 dB	
	100 kHz to 40 GHz	< 0.1 dB
Damage level		+27 dBm
Damage DC voltage		30 V

¹⁰ Below 200 kHz, power measurement accuracy is < 1.5 dB.

Noise level ¹¹ at 1 kHz measurement bandwidth, normalized to 1 Hz	R&S®ZNBT8	
	9 kHz to 50 kHz	< –115 dBm (1 Hz)
	50 kHz to 50 MHz	< –120 dBm (1 Hz)
	50 MHz to 4 GHz	< –130 dBm (1 Hz)
	4 GHz to 6.5 GHz	< –125 dBm (1 Hz)
	6.5 GHz to 8.5 GHz	< –120 dBm (1 Hz)
	R&S®ZNBT20	
	100 kHz to 1 MHz	< –105 dBm (1 Hz)
	1 MHz to 10 MHz	< –115 dBm (1 Hz)
	10 MHz to 15 GHz	< –120 dBm (1 Hz)
	15 GHz to 20 GHz	< –118 dBm (1 Hz)
	R&S®ZNBT26	
	100 kHz to 300 kHz	< –110 dBm (1 Hz)
	300 kHz to 1 MHz	< –115 dBm (1 Hz)
	1 MHz to 5 GHz	< –120 dBm (1 Hz)
	5 GHz to 20 GHz	< –118 dBm (1 Hz)
	20 GHz to 26.5 GHz	< –115 dBm (1 Hz)
	R&S®ZNBT40	
	100 kHz to 300 kHz	< –110 dBm (1 Hz)
	300 kHz to 1 MHz	< –115 dBm (1 Hz)
	1 MHz to 5 GHz	< –120 dBm (1 Hz)
	5 GHz to 20 GHz	< –118 dBm (1 Hz)
	20 GHz to 35 GHz	< –115 dBm (1 Hz)
	35 GHz to 40 GHz	< –105 dBm (1 Hz)

Additional front panel connectors

USB	(two) universal serial bus host connectors for connecting USB devices (USB 2.0); two additional USB connectors on rear panel
-----	---

Display

Screen	4.83 cm (1.9") diagonal e-paper display
Resolution	144 × 128 pixel

¹¹ The noise level is defined as the RMS value of the specified noise floor. Below 700 kHz, the R&S®ZNBT20, R&S®ZNBT26 and R&S®ZNBT40 may exhibit spurious signals that exceed the specified noise level.

Rear panel connectors

LAN	local area network connector, 8-pin, RJ-45, 1 Gbit/s
-----	--

USB host	(two) universal serial bus host connectors for connecting USB devices (USB 3.0); two additional USB connectors on front panel
USB device	universal serial bus client connector for remote control of VNA (USB 3.0)

REF IN	input for external frequency reference signal	
Connector type		BNC, female
Input frequency range		1 MHz to 20 MHz, in 1 MHz steps
Maximum permissible deviation		1 kHz
Input power		−10 dBm to +15 dBm
Input impedance		50 Ω

REF OUT	output for external frequency reference signal	
Connector type		BNC, female
Output frequency		10 MHz
Output power		+9 dBm ± 4 dB at 50 Ω

MONITOR (DVI-D)	DVI-D connector (for external monitor, single link)
MONITOR (DisplayPort)	DisplayPort connector (for external monitor, version 1.1a)

USER CONTROL	several control and trigger signals, 25-pin D-Sub, 3.3 V TTL, for controlling external generators, for limit checks, sweep signals, etc.	
CHANNEL BIT 0 to CHANNEL BIT 3	pin 8 to pin 11 (outputs)	channel-specific, user-configurable bits
CHANNEL BIT 4 to CHANNEL BIT 7	pin 16 to pin 19 (outputs)	channel-specific, user-configurable bits
DRIVE PORT 1 to DRIVE PORT 4	pin 16 to pin 19 (outputs)	indicates drive ports (can alternatively be used for channel bits 4 to 7)
PASS 1 and PASS 2	pin 13 and pin 14 (outputs)	pass/fail results of limit checks
BUSY	pin 4 (output)	measurements running
READY FOR TRIGGER	pin 6 (output)	ready for trigger
EXT GEN TRIGGER	pin 21 (output)	control signal for external generator
EXT GEN BLANK	pin 22 (input)	handshake signal from external generator
EXTERNAL TRIGGER	pin 2 (input)	first trigger input for analyzer, 5 V tolerant
EXTERNAL TRIGGER 2	pin 25 (input)	second trigger input for analyzer, 5 V tolerant

EXT TRIG IN	trigger input for analyzer	
Connector type		BNC, female
TTL signal	edge-triggered or level-triggered	3 V, 5 V tolerant
Polarity	selectable	positive or negative
Minimum pulse width		1 μs
Input impedance		> 10 kΩ

EXT TRIG OUT	trigger output of analyzer	
Connector type		BNC, female
Logic high		3.3 V (nom.)

Options

R&S®ZNBT-B4

Precision reference frequency		
Static frequency accuracy		(time since last adjustment × aging rate) + temperature drift + calibration accuracy
Aging per year	with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-7}$
Temperature drift (+5 °C to +40 °C)	with R&S®ZNBT-B4 precision frequency reference option	$\pm 1 \times 10^{-8}$
Achievable initial calibration accuracy	with R&S®ZNBT-B4 precision frequency reference option	$\pm 5 \times 10^{-8}$

R&S®ZNBT-B10

GPIO interface	remote control interface in line with IEEE-488, IEC 60625; 24-pin
-----------------------	---

R&S®ZNBT-B12

Device control	
DIRECT CTRL interface	direct control bus output

R&S®ZNBT8/ZNBT20/ZNBT26/ZNBT40-B21/-B22/-B23/-B24/-B25/-B26

Data is valid from +18 °C to +28 °C.

		specified	typical
Extended power range			
Frequency range	R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26	9 kHz to 8.5 GHz	
	R&S®ZNBT20-B21/-B22/-B23/-B24/-B25/-B26	100 kHz to 20 GHz	
	R&S®ZNBT26-B21/-B22/-B23/-B24/-B25/-B26	100 kHz to 26.5 GHz	
	R&S®ZNBT40-B21/-B22/-B23/-B24/-B25/-B26	100 kHz to 40 GHz	
Power range			
R&S®ZNBT8	9 kHz to 100 kHz	–75 dBm to +10 dBm	up to +12 dBm
	100 kHz to 100 MHz	–85 dBm to +10 dBm	up to +12 dBm
	100 MHz to 2.5 GHz	–85 dBm to +13 dBm	up to +15 dBm
	2.5 GHz to 7.5 GHz	–85 dBm to +10 dBm	up to +13 dBm
	7.5 GHz to 8.5 GHz	–85 dBm to +8 dBm	up to +12 dBm
R&S®ZNBT20	100 kHz to 10 GHz	–60 dBm to +12 dBm	up to +15 dBm
	10 GHz to 20 GHz	–60 dBm to +8 dBm	up to +11 dBm
	100 kHz to 200 kHz	–60 dBm to +7 dBm	up to +10 dBm
R&S®ZNBT26	200 kHz to 1 GHz	–60 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	–60 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	–60 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	–60 dBm to +5 dBm	up to +7 dBm
	20 GHz to 26.5 GHz	–60 dBm to 0 dBm	up to +4 dBm
	100 kHz to 200 kHz	–60 dBm to +7 dBm	up to +10 dBm
R&S®ZNBT40	200 kHz to 1 GHz	–60 dBm to +8 dBm	up to +11 dBm
	1 GHz to 10 GHz	–60 dBm to +7 dBm	up to +10 dBm
	10 GHz to 15 GHz	–60 dBm to +6 dBm	up to +8 dBm
	15 GHz to 20 GHz	–60 dBm to +5 dBm	up to +7 dBm
	20 GHz to 30 GHz	–60 dBm to 0 dBm	up to +4 dBm
	30 GHz to 40 GHz	–60 dBm to –2 dBm	up to +2 dBm

R&S®ZNBT-B81

Data is valid from +18 °C to +28 °C and at a maximum measurement bandwidth of 10 kHz.

DC inputs		
Number of ports		4
Connector type		BNC, female
Voltage range		±20 V, ±3 V, ±0.3 V
Measurement accuracy	±20 V	1 % of reading + 0.01 V
	±3 V	1 % of reading + 0.001 V
	±0.3 V	1 % of reading ± 0.001 V
Input impedance		≥ 1 MΩ
Damage voltage		30 V

R&S®ZNBT8-B108 to R&S®ZNBT8-B124, R&S®ZNBT20/ZNBT26/ZNBT40-B112 to R&S®ZNBT20/ZNBT26/ZNBT40-B124

For additional ports, the specifications of paragraphs Measurement range, Measurement speed, Measurement accuracy, Effective system data, Factory-calibrated system data, Test port output and Test port input are valid in an analogous way.

R&S®ZNBT8-B361 to R&S®ZNBT8-B366


Receiver step attenuators		
Frequency range	R&S®ZNBT8-B361, R&S®ZNBT8-B362, R&S®ZNBT8-B363, R&S®ZNBT8-B364, R&S®ZNBT8-B365, R&S®ZNBT8-B366	9 kHz to 8.5 GHz
Attenuation		0 dB to 30 dB, in 10 dB steps

R&S®ZNBT8-B504/-B508/-B512/-B516/-B520/-B524

Data is valid from +18 °C to +28 °C.

Extended dynamic range		specified	typical
Power range	without R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	9 kHz to 2 MHz	–55 dBm to +8 dBm	
	2 MHz to 6.5 GHz	–55 dBm to +10 dBm	
	6.5 GHz to 7.5 GHz	–55 dBm to +8 dBm	
	7.5 GHz to 8.5 GHz	–55 dBm to +4 dBm	
	with R&S®ZNBT8-B21/-B22/-B23/-B24/-B25/-B26 extended power range option		
	9 kHz to 100 kHz	–75 dBm to +8 dBm	
	100 kHz to 2 MHz	–85 dBm to +8 dBm	
	2 MHz to 6.5 GHz	–85 dBm to +10 dBm	
	6.5 GHz to 7.5 GHz	–85 dBm to +8 dBm	
	7.5 GHz to 8.5 GHz	–85 dBm to +4 dBm	
Dynamic range ¹²	9 kHz to 100 kHz	≥ 100 dB	110 dB
	100 kHz to 50 MHz	≥ 125 dB	135 dB
	50 MHz to 7 GHz	≥ 135 dB	145 dB
	7 GHz to 8.5 GHz	≥ 130 dB	140 dB

¹² The dynamic range is defined as the difference between the actual maximum source power and the RMS value of the data trace of the transmission magnitude, which is produced by noise and crosstalk with the test ports short-circuited. The specification applies at 10 Hz measurement bandwidth, without system error correction. The dynamic range can be increased by using a measurement bandwidth of 1 Hz. Crosstalk does not limit the dynamic range. Dynamic range for test port pairs where the receiving port is fitted with R&S®ZNBT8-B5xx option. If the source port is fitted with R&S®ZNBT8-B5xx option and the receiving port is not, the values are reduced by up to 10 dB.

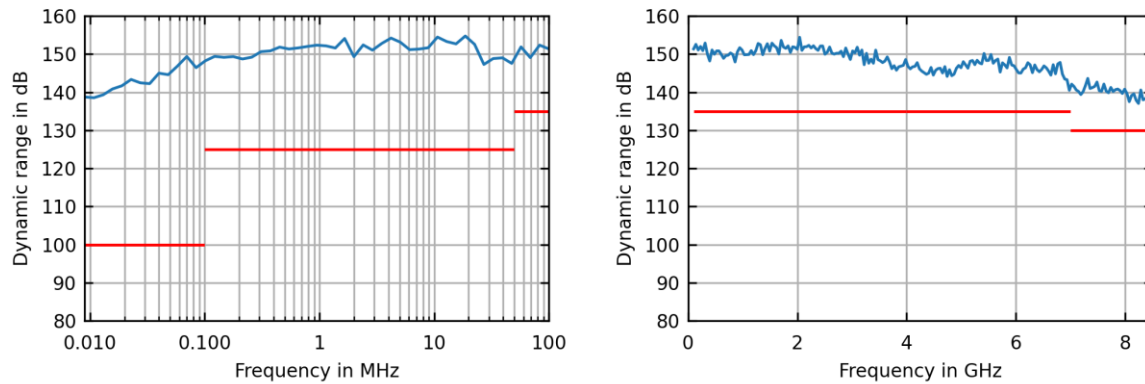

Measured dynamic range in dB versus frequency for the R&S®ZNBT8 with option R&S®ZNBT8-B5xx

Test port input		
Match	without system error correction	
	9 kHz to 50 kHz	≥ 10 dB
	50 kHz to 8.5 GHz	≥ 18 dB
Maximum nominal input level		+10 dBm
Receiver linearity referenced to -10 dBm	for +18 dB to +10 dB	
	9 kHz to 7.5 GHz	≤ 0.2 dB
	for +14 dB to +10 dB	
	7.5 GHz to 8.5 GHz	≤ 0.2 dB
	for +10 dB to -40 dB	
Noise level ¹³ at 1 kHz measurement bandwidth, normalized to 1 Hz	9 kHz to 8.5 GHz	≤ 0.1 dB
	9 kHz to 50 kHz	≤ -125 dBm (1 Hz)
	50 kHz to 50 MHz	≤ -130 dBm (1 Hz)
	50 MHz to 7 GHz	≤ -140 dBm (1 Hz)
	7 GHz to 8.5 GHz	≤ -130 dBm (1 Hz)

Trace stability			specified	typical
Trace noise magnitude (RMS)	at 0 dBm source power, 0 dB reflection	IF bandwidth		
	100 kHz to 100 MHz	10 kHz	≤ 0.005 dB	0.001 dB
	100 MHz to 8.5 GHz	10 kHz	≤ 0.005 dB	0.002 dB

R&S®ZNBT-K27


Internal pulsed source		
Source switch	settable pulse period	3 μ s to 67 s, in 1 μ s steps
	settable pulse width ¹⁴	3 μ s to 67 s, in 1 μ s steps
	fall time (90 % to 10 %)	200 ns (nom.)
	rise time (10 % to 90 %)	1 μ s (nom.)
	on/off ratio	80 dB (nom.)
	level accuracy of high level	add 2 dB (nom.) to specification of instrument
	port to port delay	up to 1 μ s (nom.)
	trigger delay (external trigger)	up to 6 μ s (nom.)

¹³ The noise level is defined as the RMS value of the specified noise floor.

¹⁴ The accuracy of the output pulse width is 2 μ s (nom.).

R&S®ZNBT-K30

Noise figure measurement	
Recommended setup and options	R&S®ZNBT • and diode power sensor (e.g. R&S®NRP40S), see Ordering information • and step attenuator (e.g. R&S®RSC), see Ordering information • and external low noise amplifier (LNA) ¹⁵, optional: switchable • and test cables, see Ordering information • and fixed attenuators: 3 dB, 6 dB, 10 dB, etc.
Noise level of test port input	see section Test port input

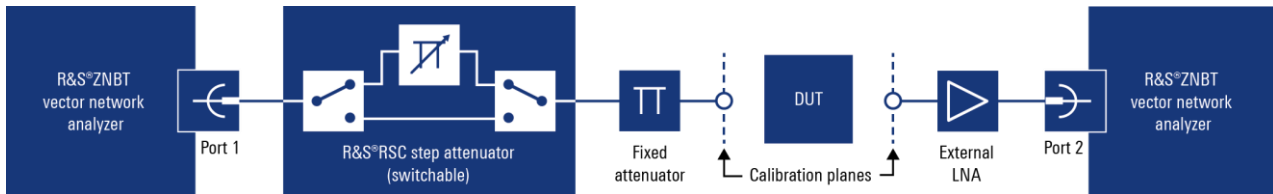

Recommended setup for R&S®ZNBT-K30 noise figure measurements

R&S®ZNBT-K980 ¹⁶

Health and utilization monitoring service (HUMS)		
Interfaces	protocols and interfaces supported for data readout and display	• SNMP (v1, v2c, v3) • REST (JSON) • SCPI • device web
Services	information provided	• device information (model, serial number, BIOS, date, time, system, HUMS and software information) • user-defined information tags (e.g. for asset management) • equipment information (hardware, options, software, licenses) • system operating status • instrument security information • service related information (due dates etc.) • mass storage related information • instrument utilization data • device history (event log)

R&S®ZNBT-Z14

Handler I/O (external)	several control and trigger signals, 36-pin Centronics connector, 3.3 V TTL, for controlling external devices, limit checks, sweep signals, etc.	
Keysight handler interface compatibility	type 3	
Input signals	pin 2, pin 18	3.3 V TTL, 5 V tolerant
Output signals	pin 3 to pin 17, pin 19 to pin 21, pin 30 to pin 34, pin 36	3.3 V TTL, 5 V tolerant
Input/output signals	pin 22 to pin 29	3.3 V TTL, 5 V tolerant
+5 V output	pin 35	+5 V, max. 100 mA
Response time of write strobe signal	pin 32	1 µs
Pulse width		
Write strobe signal	pin 32	1 µs
External trigger signal	pin 18	> 1 µs
Sweep end signal	pin 34	> 10 µs

¹⁵ Contact your local Rohde & Schwarz sales office for more information.

¹⁶ See application note under www.rohde-schwarz.com/appnote/GFM336 for more information. For use with common available asset management tools.

R&S®ZNBT-USY

For instruments with R&S®ZNBT-USY installed, the sweep times will be updated to the sweep times stated in section "Measurement speed". After installing R&S®ZNBT-USY the sweep mode "swept" is no longer available.

If R&S®ZNBT-USY is installed in the R&S®ZNBT20 model with order number 1332.9002.24, the following specifications change to:

Harmonics		specified	typical
	at 0 dBm		
	100 kHz to 10 GHz	≤ -22 dBc	-40 dBc
	10 GHz to 15 GHz	≤ -20 dBc	-30 dBc
	at -5 dBm		
	15 GHz to 20 GHz	≤ -20 dBc	-30 dBc

Measured sweep times in ms versus number of measurement points ¹⁷					
Number of measurement points	51	201	401	1601	5001
Sweep mode	step	step	step	step	step
9 GHz start frequency, 10 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	3.0	3.9	5.2	11.9	31.6
With 4-port TOSM calibration	7.7	12.3	18.7	54.3	156
With 24-port TOSM calibration	43.2	87.5	143	478	1538
9 GHz start frequency, 10 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	48.8	176	345	1362	4241
With 4-port TOSM calibration	190	699	1376	5442	16958
With 24-port TOSM calibration	1135	4190	8258	32676	101959
1 MHz start frequency, 20 GHz stop frequency, AGC AUTO, 500 kHz measurement bandwidth					
With correction switched off	8.7	10.6	12.7	24.2	56.2
With 4-port TOSM calibration	30.5	38	46.4	92.6	220
With 24-port TOSM calibration	179	238	305	705	2025
1 MHz start frequency, 20 GHz stop frequency, AGC LOW DIST, 1 kHz measurement bandwidth					
With correction switched off	52.8	182	351	1374	4270
With 4-port TOSM calibration	208	724	1399	5491	17077
With 24-port TOSM calibration	1244	4347	8405	32982	102791


¹⁷ Sweep time is to be understood as cycle time; static frequency accuracy of the instrument applies; measured with LPW11 controller.

General data


Temperature loading		in line with IEC 60068-2-1 and IEC 60068-2-2
	operating temperature range	+5 °C to +40 °C
	storage temperature range	–20 °C to +60 °C
Damp heat		+40 °C at 85 % rel. humidity, in line with IEC 60068-2-30
Altitude	operating environment	max. 2000 m
	storage environment	max. 4500 m
Mechanical resistance	vibration, sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude constant, 55 Hz to 150 Hz, 0.5 g constant, in line with IEC 60068-2-6
	vibration, random	8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with IEC 60068-2-64
	shock	40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I
Calibration interval		1 year
EMC	RF emission	in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup); instrument complies with the emission requirements stipulated by EN 55011 and EN 61326-1 class A; This means that the instrument is suitable for use in industrial environments.
	immunity	in line with EMC Directive 2014/30/EU, including: IEC/EN 61326-1 (immunity test requirement for industrial environment IEC/EN 61326-1 table 2), IEC/EN 61326-2-1, IEC/EN 61000-3-2, IEC/EN 61000-3-3
EU legislation	for details, see user documentation	EU: in line with Data Act – Regulation (EU) 2023/2854
Safety		in line with IEC 61010-1, EN 61010-1 and UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Power supply		100 V to 240 V at 50 Hz to 60 Hz and 400 Hz, max. 10 A to 4.2 A (respectively)
Power consumption	R&S®ZNBT8	
	with 4 ports	max. 1000 W, 199 W (nom.)
	with 8 ports	max. 1000 W, 267 W (nom.)
	with 12 ports	max. 1000 W, 357 W (nom.)
	with 16 ports	max. 1000 W, 432 W (nom.)
	with 20 ports	max. 1000 W, 522 W (nom.)
	with 24 ports	max. 1000 W, 586 W (nom.)
	R&S®ZNBT20	
	with 8 ports	max. 1000 W, 335 W (nom.)
	with 12 ports	max. 1000 W, 426 W (nom.)
	with 16 ports	max. 1000 W, 521 W (nom.)
	with 20 ports	max. 1000 W, 637 W (nom.)
	with 24 ports	max. 1000 W, 732 W (nom.)
	R&S®ZNBT26/R&S®ZNBT40	
	with 8 ports	max. 1000 W, 335 W (nom.)
	with 12 ports	max. 1000 W, 426 W (nom.)
	with 16 ports	max. 1000 W, 521 W (nom.)
	with 20 ports	max. 1000 W, 637 W (nom.)
	with 24 ports	max. 1000 W, 732 W (nom.)
Test marks		VDE, cCSA _{US} , CE conformity mark

Dimensions	W × H × D	463 mm × 240 mm × 612 mm (18.2 in × 9.4 in × 24.1 in)
Weight	R&S®ZNBT8	
	with 4 ports	22 kg (48.5 lb) (nom.)
	with 8 ports	24 kg (52.9 lb) (nom.)
	with 12 ports	29 kg (63.9 lb) (nom.)
	with 16 ports	31 kg (68.3 lb) (nom.)
	with 20 ports	36 kg (79.4 lb) (nom.)
	with 24 ports	38 kg (83.8 lb) (nom.)
	R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40	
	with 8 ports	27 kg (59.5 lb) (nom.)
	with 12 ports	34 kg (75 lb) (nom.)
	with 16 ports	36 kg (79.4 lb) (nom.)
	with 20 ports	43 kg (94.8 lb) (nom.)
	with 24 ports	45 kg (99.2 lb) (nom.)
Shipping weight	R&S®ZNBT8	
	with 4 ports	28 kg (61.7 lb) (nom.)
	with 8 ports	30 kg (66.1 lb) (nom.)
	with 12 ports	35 kg (77.2 lb) (nom.)
	with 16 ports	37 kg (81.6 lb) (nom.)
	with 20 ports	42 kg (92.6 lb) (nom.)
	with 24 ports	44 kg (97.0 lb) (nom.)
	R&S®ZNBT20/R&S®ZNBT26/R&S®ZNBT40	
	with 8 ports	33 kg (72.8 lb) (nom.)
	with 12 ports	40 kg (88.2 lb) (nom.)
	with 16 ports	42 kg (92.6 lb) (nom.)
	with 20 ports	49 kg (108.0 lb) (nom.)
	with 24 ports	51 kg (112.4 lb) (nom.)


Dimensions (in mm)

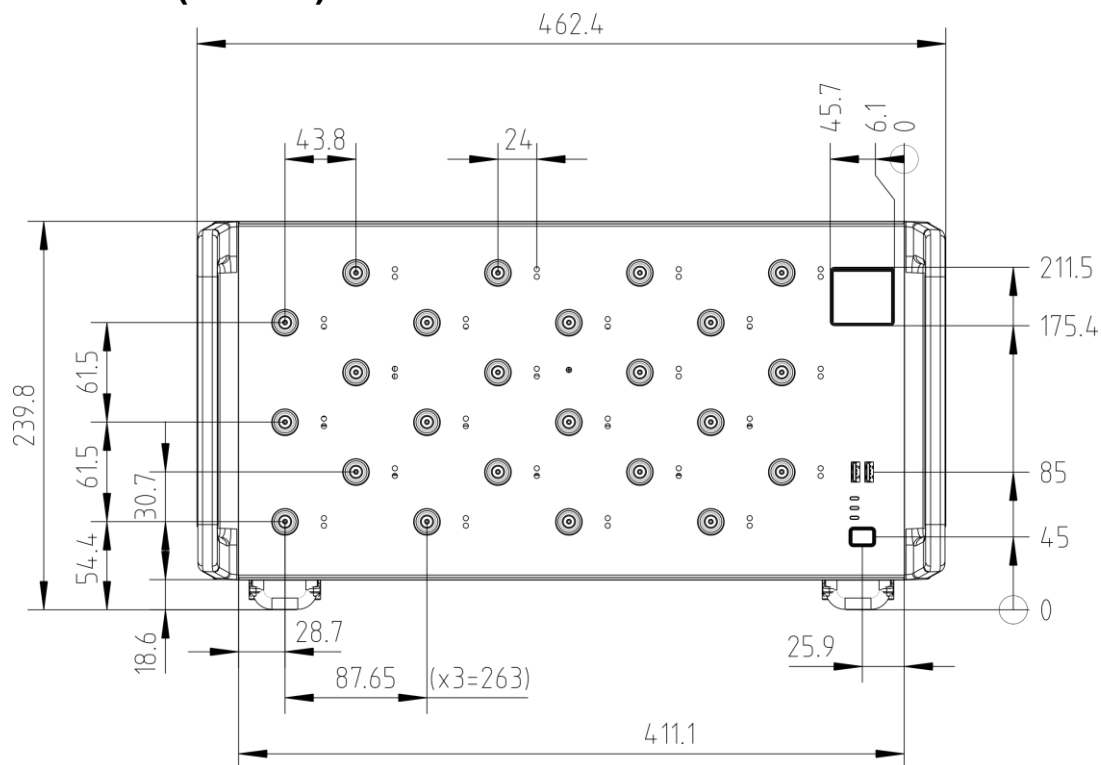


Front view of the R&S®ZNBT8

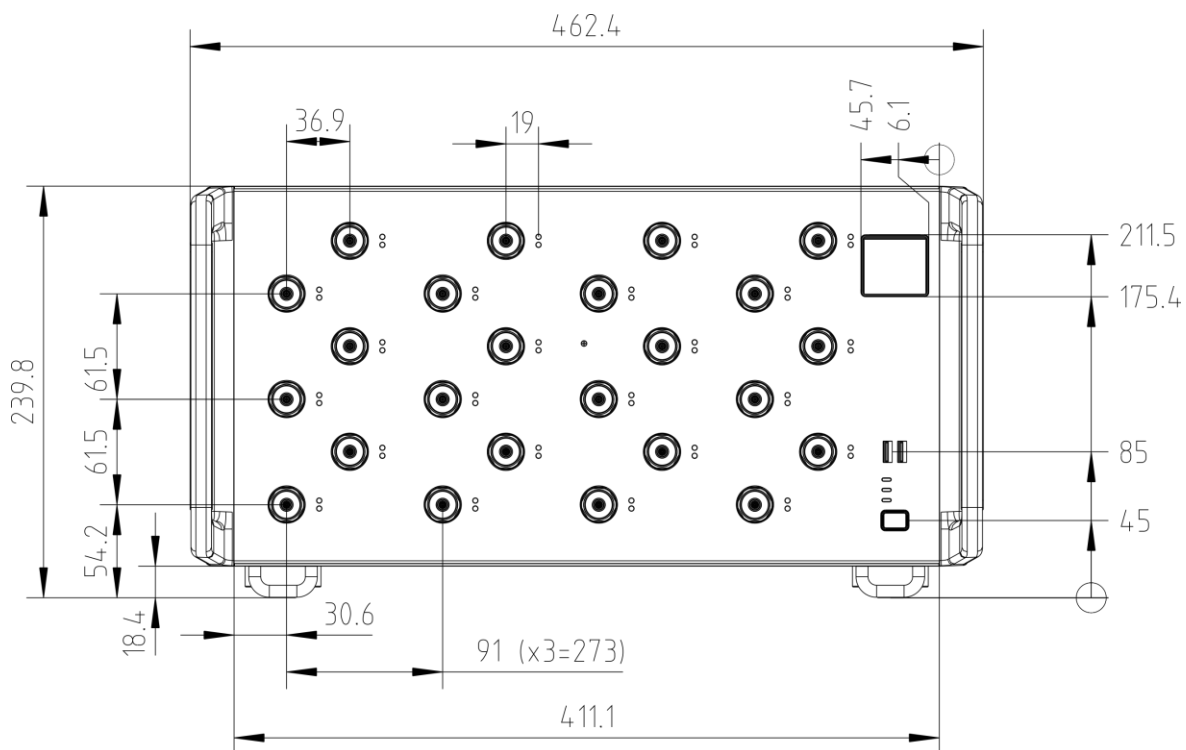


Front view of the R&S®ZNBT20, R&S®ZNBT26 and R&S®ZNBT40

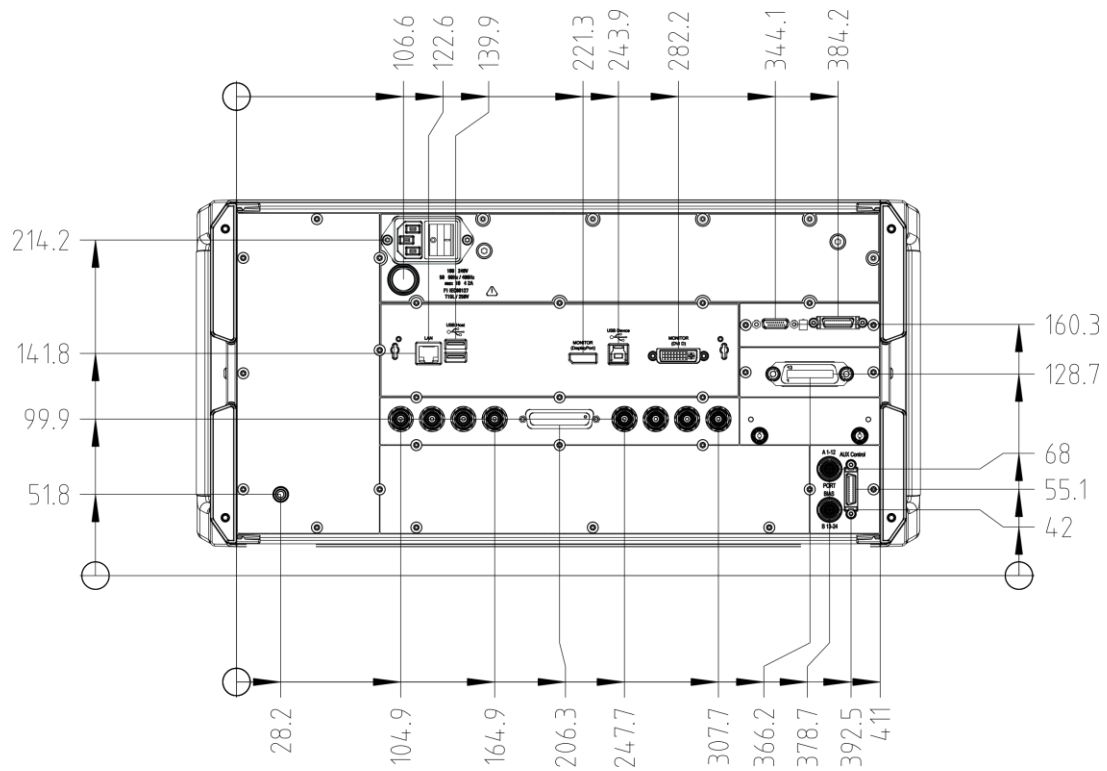

Rear view of the R&S®ZNBT8, R&S®ZNBT20, R&S®ZNBT26 and R&S®ZNBT40

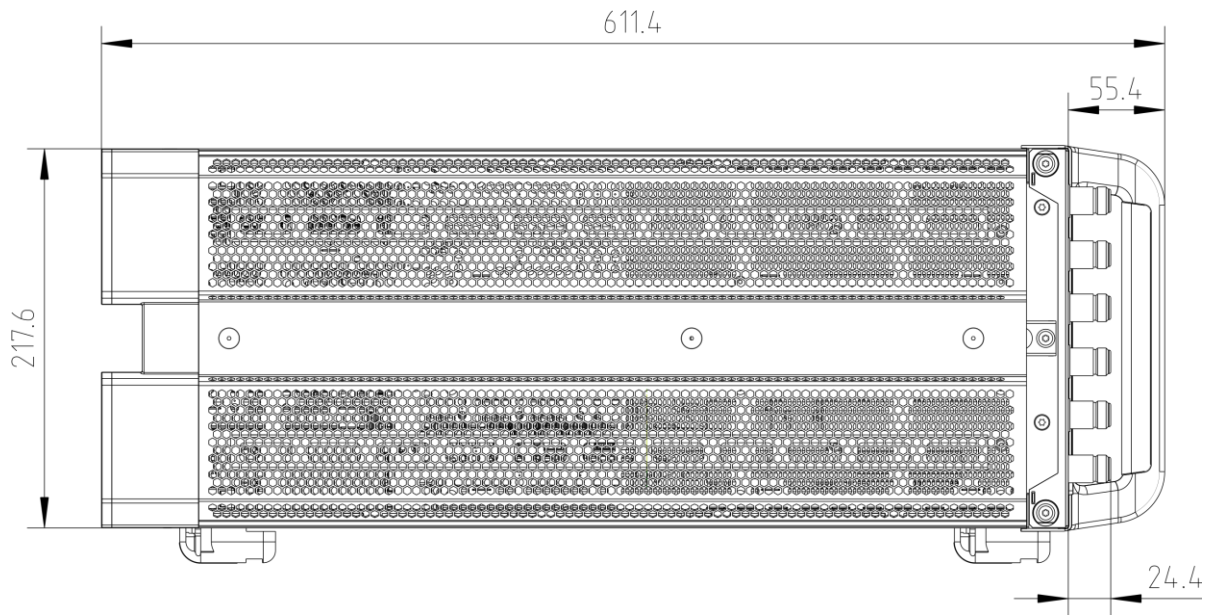

Side view of the R&S®ZNB T8

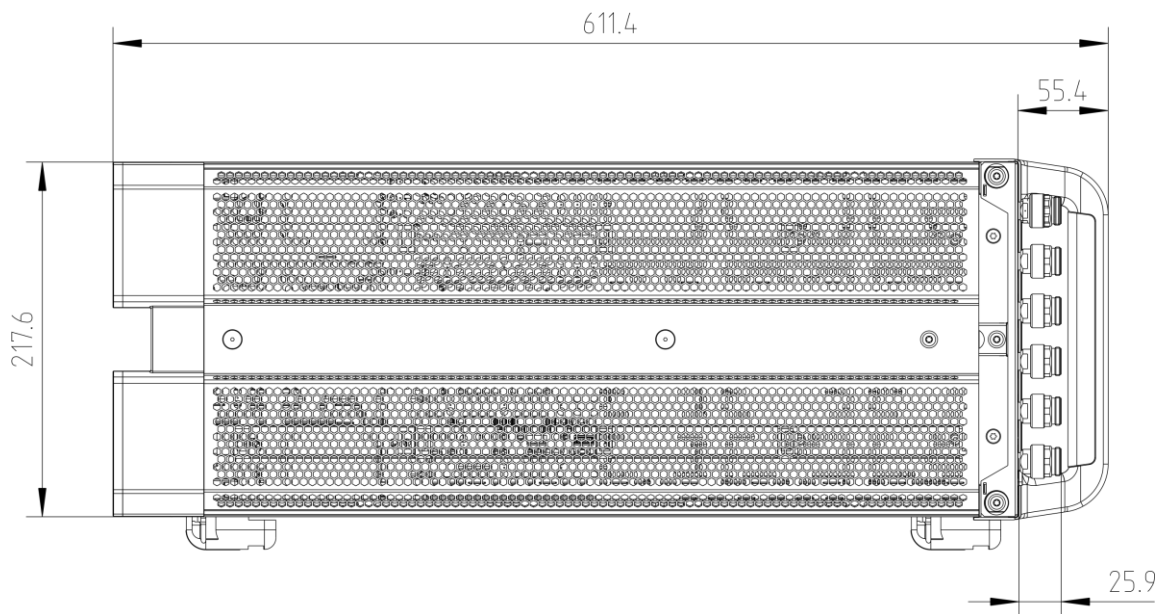

Side view of the R&S®ZNB T20, R&S®ZNB T26 and R&S®ZNB T40

Ordering information

Designation	Type	Retrofit ¹⁸	On site ¹⁹	Order No.
Base unit				
Vector network analyzer, 4 ports, 8.5 GHz, N ²⁰	R&S®ZNBT8			1318.7006.24
Vector network analyzer, 8 ports, 20 GHz, 3.5 mm ²⁰	R&S®ZNBT20			1332.9002.64
Vector network analyzer, 8 ports, 26.5 GHz, 2.92 mm ²⁰	R&S®ZNBT26			1332.9002.34
Vector network analyzer, 8 ports, 40 GHz, 2.92 mm ²⁰	R&S®ZNBT40			1332.9002.44
Options				
Additional ports				
R&S®ZNBT8				
Additional ports 5 to 8	R&S®ZNBT8-B108	•		1319.4200.02
Additional ports 9 to 12	R&S®ZNBT8-B112	•		1319.4217.02
Additional ports 13 to 16	R&S®ZNBT8-B116	•		1319.4223.02
Additional ports 17 to 20	R&S®ZNBT8-B120	•		1319.4230.02
Additional ports 21 to 24	R&S®ZNBT8-B124	•		1319.4246.02
R&S®ZNBT20				
Additional ports 9 to 12	R&S®ZNBT20B112	•		1338.2116.02
Additional ports 13 to 16	R&S®ZNBT20B116	•		1338.2122.02
Additional ports 17 to 20	R&S®ZNBT20B120	•		1338.2139.02
Additional ports 21 to 24	R&S®ZNBT20B124	•		1338.2145.02
R&S®ZNBT26				
Additional ports 9 to 12	R&S®ZNBT26B112	•		1332.9454.34
Additional ports 13 to 16	R&S®ZNBT26B116	•		1332.9460.34
Additional ports 17 to 20	R&S®ZNBT26B120	•		1332.9302.34
Additional ports 21 to 24	R&S®ZNBT26B124	•		1332.9319.34
R&S®ZNBT40				
Additional ports 9 to 12	R&S®ZNBT40B112	•		1332.9454.44
Additional ports 13 to 16	R&S®ZNBT40B116	•		1332.9460.44
Additional ports 17 to 20	R&S®ZNBT40B120	•		1332.9302.44
Additional ports 21 to 24	R&S®ZNBT40B124	•		1332.9319.44
Extended power range				
R&S®ZNBT8				
Ports 1 to 4	R&S®ZNBT8-B21	•		1319.4252.02
Ports 5 to 8	R&S®ZNBT8-B22	•		1319.4269.02
Ports 9 to 12	R&S®ZNBT8-B23	•		1319.4275.02
Ports 13 to 16	R&S®ZNBT8-B24	•		1319.4281.02
Ports 17 to 20	R&S®ZNBT8-B25	•		1319.4298.02
Ports 21 to 24	R&S®ZNBT8-B26	•		1319.4300.02
R&S®ZNBT20				
Ports 1 to 4	R&S®ZNBT20-B21	•		1332.9348.02
Ports 5 to 8	R&S®ZNBT20-B22	•		1332.9354.02
Ports 9 to 12	R&S®ZNBT20-B23	•		1332.9360.02
Ports 13 to 16	R&S®ZNBT20-B24	•		1332.9377.02
Ports 17 to 20	R&S®ZNBT20-B25	•		1332.9383.02
Ports 21 to 24	R&S®ZNBT20-B26	•		1332.9390.02
R&S®ZNBT26				
Ports 1 to 4	R&S®ZNBT26-B21	•		1332.9348.34
Ports 5 to 8	R&S®ZNBT26-B22	•		1332.9354.34
Ports 9 to 12	R&S®ZNBT26-B23	•		1332.9360.34
Ports 13 to 16	R&S®ZNBT26-B24	•		1332.9377.34
Ports 17 to 20	R&S®ZNBT26-B25	•		1332.9383.34
Ports 21 to 24	R&S®ZNBT26-B26	•		1332.9390.34
R&S®ZNBT40				
Ports 1 to 4	R&S®ZNBT40-B21	•		1332.9348.44
Ports 5 to 8	R&S®ZNBT40-B22	•		1332.9354.44
Ports 9 to 12	R&S®ZNBT40-B23	•		1332.9360.44
Ports 13 to 16	R&S®ZNBT40-B24	•		1332.9377.44
Ports 17 to 20	R&S®ZNBT40-B25	•		1332.9383.44
Ports 21 to 24	R&S®ZNBT40-B26	•		1332.9390.44

¹⁸ Option may also be ordered later, upgrade in service.

¹⁹ Option may be installed by the user on site.

²⁰ External monitor, mouse and keyboard or external touchscreen required for manual operation.

Designation	Type	Retrofit ¹⁸	On site ¹⁹	Order No.
Receiver step attenuators, for R&S®ZNB8				
Ports 1 to 4	R&S®ZNB8-B361	•		1319.4317.02
Ports 5 to 8	R&S®ZNB8-B362	•		1319.4323.02
Ports 9 to 12	R&S®ZNB8-B363	•		1319.4330.02
Ports 13 to 16	R&S®ZNB8-B364	•		1319.4346.02
Ports 17 to 20	R&S®ZNB8-B365	•		1319.4352.02
Ports 21 to 24	R&S®ZNB8-B366	•		1319.4369.02
Extended dynamic range ²¹ , for R&S®ZNB8				
Ports 1 to 4	R&S®ZNB8-B504			1332.8335.02
Ports 5 to 8	R&S®ZNB8-B508	•		1332.8341.02
Ports 9 to 12	R&S®ZNB8-B512	•		1332.8358.02
Ports 13 to 16	R&S®ZNB8-B516	•		1332.8364.02
Ports 17 to 20	R&S®ZNB8-B520	•		1332.8370.02
Ports 21 to 24	R&S®ZNB8-B524	•		1332.8387.02
Precision frequency reference (OCXO)	R&S®ZNB8-B4	•		1332.9477.02
GPIO interface	R&S®ZNB8-B10	•	•	1332.9483.02
Device control	R&S®ZNB8-B12	•	•	1332.9490.02
Additional removable HDDs and SSDs				
Additional removable hard disk, Windows Embedded Standard 7 (32 bit), for R&S®ZNB8 with LPW10	R&S®ZNB8-B19	•	•	1332.9283.10
Additional removable hard disk, Windows Embedded Standard 7 (64 bit), for R&S®ZNB8/R&S®ZNB20 with LPW11	R&S®ZNB8-B19	•	•	1332.9283.11
Additional removable SSD, Windows 10 IoT Enterprise 2016 LTSC (64 bit), for R&S®ZNB8/R&S®ZNB20/R&S®ZNB26/R&S®ZNB40	R&S®ZNB8-B19	•	•	1332.9283.12
Additional removable SSD, Windows 10 IoT Enterprise 2021 LTSC (64 bit), for R&S®ZNB8/R&S®ZNB20/R&S®ZNB26/R&S®ZNB40	R&S®ZNB8-B19	•	•	1332.9283.13
DC inputs	R&S®ZNB8-B81	•		1332.9502.02
Time domain analysis	R&S®ZNB8-K2	•	•	1318.8425.02
Distance-to-fault (DTF) measurement	R&S®ZNB8-K3	•	•	1350.5063.02
Extended time domain analysis	R&S®ZNB8-K20	•	•	1319.4400.02
Frequency conversion ²²	R&S®ZNB8-K4	•	•	1318.8431.02
Intermodulation measurements ²³	R&S®ZNB8-K14	•	•	1318.8448.02
10 MHz receiver bandwidth	R&S®ZNB8-K17	•	•	1318.8454.02
1 mHz frequency resolution	R&S®ZNB8-K19	•	•	1319.4000.02
Pulsed source	R&S®ZNB8-K27	•	•	1328.8840.02
Noise figure measurement	R&S®ZNB8-K30	•	•	1332.8406.02
SNP assistant	R&S®ZNB8-K100	•	•	1338.9340.02
EaZy deembedding (EZD)	R&S®ZNB8-K210	•	•	1328.8634.02
In-situ deembedding (ISD)	R&S®ZNB8-K220	•		1328.8640.02
Smart fixture deembedding (SFD)	R&S®ZNB8-K230	•		1328.8657.02
Delta-L 4.0 PCB characterization	R&S®ZNB8-K231	•		1328.8663.02
Health and utilization monitoring service (HUMS)	R&S®ZNB8-K980	•	•	1338.8989.02
Handler I/O (external), for R&S®ZNB8	R&S®ZNB8-Z14	•	•	1326.6640.05
External RFFE GPIO interface	R&S®ZN-Z15	•	•	1325.5905.02
External RFFE GPIO interface incl. voltage/current measurement	R&S®ZN-Z15	•	•	1325.5905.03
Rackmount kit	R&S®ZZA-KN5	•	•	1175.3040.00
Direct control cable	R&S®ZN-B121	•	•	1323.9290.00
Upgrade kit				
Synthesizer upgrade kit ²⁴ , for R&S®ZNB8	R&S®ZNB8-USY	•		1328.8857.02

²¹ The R&S®ZNB8-B504/-B508/-B512/-B516/-B520/-B524 options cannot be combined with the R&S®ZNB8-B361/-B362/-B363/-B364/-B365/-B366 and replace the corresponding R&S®ZNB8-B108/-B112/-B116/-B120/-B124 options.

²² Second internal source is included in R&S®ZNB8-B112 or R&S®ZNB8-B512 options.

²³ Requires R&S®ZNB8-K4 option.

²⁴ The R&S®ZNB8-USY requires firmware version 3.72 or higher and Windows 10. For upgrade kits, contact your local Rohde & Schwarz sales office. R&S®ZNB8-USY cannot be installed in the R&S®ZNB820 model with order number 1332.9002.24 and serial number < 101025.

Designation	Type	Order No.
Recommended calibration accessories		
Calibration kits, for manual calibration – economy		
Calibration kit, 0 Hz to 18 GHz, N (f)	R&S®ZN-Z170	1328.8163.03
Calibration kit, 0 Hz to 26.5 GHz, 3.5 mm (f)	R&S®ZN-Z135	1328.8157.03
Calibration kit, 0 Hz to 40 GHz, 2.92 mm (f)	R&S®ZN-Z129	1328.8140.03
Calibration kit, 0 Hz to 43.5 GHz, 2.92 mm (f)	R&S®ZN-Z129E	1328.8170.03
Calibration kits, for manual calibration – high-end		
Calibration kit, 0 Hz to 18 GHz, N, 50 Ω	R&S®ZV-Z270	5011.6536.02
Calibration kit, 0 Hz to 26.5 GHz, 3.5 mm	R&S®ZN-Z235	1336.8500.02
Calibration kit, 0 Hz to 43.5 GHz, 2.92 mm	R&S®ZN-Z229	1336.7004.02
Calibration kit, 0 Hz to 50 GHz, 2.4 mm	R&S®ZN-Z224	1339.5002.02
Calibration units, for automatic calibration – economy		
Calibration unit, 5 kHz to 4.5 GHz, 2-port ²⁵	R&S®ZN-ZE104	1350.8040.04
Calibration unit, 5 kHz to 9 GHz, 2-port ²⁵	R&S®ZN-ZE109	1350.8040.09
Calibration unit, 5 kHz to 26.5 GHz, 2-port ²⁵	R&S®ZN-ZE126	1350.8040.26
Calibration unit, 100 kHz to 8.5 GHz, 4 ports, SMA (f)	R&S®ZN-Z153	1319.6178.34
Calibration unit, 100 kHz to 8.5 GHz, 6 ports, SMA (f)	R&S®ZN-Z152	1319.6003.36
Calibration unit, 100 kHz to 8.5 GHz, 6 ports, SMA (f)	R&S®ZN-Z154	1319.5120.02
Additional ports, 7 to 12, SMA (f)	R&S®ZNZ154-B22	1319.5136.22
Additional ports, 13 to 18, SMA (f)	R&S®ZNZ154-B32	1319.5136.32
Additional ports, 19 to 24, SMA (f)	R&S®ZNZ154-B42	1319.5136.42
Calibration units, for automatic calibration – high-end		
Calibration unit, 100 kHz to 8.5 GHz, 2 ports, N (f)	R&S®ZN-Z51	1319.5507.72
Calibration unit, 100 kHz to 8.5 GHz, 4 ports, N (f)	R&S®ZN-Z51	1319.5507.74
Calibration unit, 100 kHz to 8.5 GHz, 2 ports, 3.5 mm (f)	R&S®ZN-Z51	1319.5507.32
Calibration unit, 100 kHz to 8.5 GHz, 4 ports, 3.5 mm (f)	R&S®ZN-Z51	1319.5507.34
Calibration unit, 9 kHz to 9 GHz, 2 ports, 3.5 mm (f)	R&S®ZN-Z50	1335.6904.30
Calibration unit, 9 kHz to 26.5 GHz, 2 ports, 3.5 mm (f)	R&S®ZN-Z50	1335.6904.32
Calibration unit, 100 kHz to 26.5 GHz, 4 ports, 3.5 mm (f)	R&S®ZN-Z52	1335.6991.30
Calibration unit, 100 kHz to 26.5 GHz, 2 ports, 3.5 mm (f)	R&S®ZN-Z53	1335.7046.32
Calibration unit, 100 kHz to 18 GHz, 2 ports, N (f)	R&S®ZN-Z53	1335.7046.72
Calibration unit, 9 kHz to 40 GHz, 2 ports, 2.92 mm (f), characterized to 43.5 GHz	R&S®ZN-Z54	1335.7117.92
Calibration unit, 9 kHz to 50 GHz, 2 ports, 2.4 mm (f)	R&S®ZN-Z55	1335.7181.42
Inline calibration units, for automatic calibration		
CAN bus controller, for inline calibration units	R&S®ZN-Z30	1328.7609.02
Inline calibration unit, 10 MHz to 8.5 GHz	R&S®ZN-Z32	1328.7638.02
Inline calibration unit, 10 MHz to 40 GHz, characterized to 43.5 GHz	R&S®ZN-Z33	1328.7644.02
Inline calibration unit, 10 MHz to 40 GHz, for TVAC, characterized to 43.5 GHz	R&S®ZN-Z33	1328.7644.03
Thermal insulator, 2.92 mm	R&S®ZN-Z391	1350.8504.02
Switch matrices		
Switch matrix, 10 MHz to 8.5 GHz, 2 VNA ports to 6 test ports	R&S®ZN-Z84	1319.4500.02
Additional test ports, 7 to 12, 2 VNA ports to 12 test ports	R&S®ZN-Z84-B22	1319.4969.22
Additional test ports, 13 to 18, 2 VNA ports to 18 test ports	R&S®ZN-Z84-B32	1319.4969.32
Additional test ports, 19 to 24, 2 VNA ports to 24 test ports	R&S®ZN-Z84-B42	1319.4969.42
Additional test ports, 7 to 12, 4 VNA ports to 12 test ports	R&S®ZN-Z84-B24	1319.4969.24
Additional test ports, 13 to 18, 4 VNA ports to 18 test ports	R&S®ZN-Z84-B34	1319.4969.34
Additional test ports, 19 to 24, 4 VNA ports to 24 test ports	R&S®ZN-Z84-B44	1319.4969.44
Switch matrix, 100 MHz to 26.5 GHz, 2 VNA ports to 6 test ports	R&S®ZN-Z86	1351.2216.02
Additional test ports, 7 to 12, 2 VNA ports to 12 test ports	R&S®ZN-Z86-B22	1351.2900.22
Additional test ports, 13 to 18, 2 VNA ports to 18 test ports ²⁶	R&S®ZN-Z86-B32	1351.2900.32
Additional test ports, 19 to 24, 2 VNA ports to 24 test ports ²⁷	R&S®ZN-Z86-B42	1351.2900.42
Additional test ports, 7 to 12, 4 VNA ports to 12 test ports	R&S®ZN-Z86-B24	1351.2900.24
Additional test ports, 13 to 18, 4 VNA ports to 18 test ports ²⁸	R&S®ZN-Z86-B34	1351.2900.34
Additional test ports, 19 to 24, 4 VNA ports to 24 test ports ²⁹	R&S®ZN-Z86-B44	1351.2900.44

²⁵ Various port options available, see R&S®ZN-ZE1xx specifications document (PD 3683.5597.22).

²⁶ Requires R&S®ZN-Z86-B22.

²⁷ Requires R&S®ZN-Z86-B32.

²⁸ Requires R&S®ZN-Z86-B24.

²⁹ Requires R&S®ZN-Z86-B34.

Designation	Type	Order No.
Switch matrix, 100 MHz to 26.5 GHz, with additional RF access	R&S®ZN-Z86X	1351.2222.02
Additional test ports, 1 to 12, 2 or 4 VNA ports	R&S®ZNZ86X-B24	1351.2222.24
Additional test ports, 1 to 24, 2 or 4 VNA ports	R&S®ZNZ86X-B44	1351.2222.44
Semi-rigid cable set, for R&S®ZNBT, 2.92 mm (f) to 2.92 mm (m), R&S®ZNBT port 1/2/3/4 to R&S®ZN-Z86	R&S®ZN-ZT26	1328.8928.02
Semi-rigid cable set, for R&S®ZNBT, 2.92 mm (f) to 2.92 mm (m), R&S®ZNBT port 1/2/3/4 to R&S®ZN-Z86X	R&S®ZN-ZT26	1328.8928.03
Semi-rigid cable set, for R&S®ZNBT, 2.92 mm (f) to 2.92 mm (m), R&S®ZNBT port 1/2/3/4/5/6/7/8 to R&S®ZN-Z86X	R&S®ZN-ZT26	1328.8928.04
Mechanical matrix extension, 2 HU, for R&S®ZN-Z86, benchtop operation	R&S®ZN-ZTBE	1351.3906.02
Mechanical matrix extension, 3 HU, for R&S®ZN-Z86X, benchtop operation	R&S®ZN-ZTXBE	1351.3906.03

Warranty and service

Warranty		
Base unit		1 year
All other items		1 year
Service options		
	Service plans	On demand
Calibration	up to five years ³⁰	pay per calibration
Warranty and repair	up to five years ³⁰	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

³⁰ For extended periods, contact your Rohde & Schwarz sales office.

Service at Rohde & Schwarz You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management
ISO 9001

Certified Environmental Management
ISO 14001

More Rohde & Schwarz certificates



Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

