

Amplifiers

Model 125S1G6C

Features:

- 125 W CW, 1.0 – 6.0 GHz
- Class A design
- 100% mismatch tolerant
- Built-in fault monitoring, logging and protection
- Touch screen display
- RF sample ports with forward and reverse power monitoring
- VSWR monitor with user settable limit
- User settable ALC
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise
- 3 Year Warranty

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
- 4G LTE, 5G NR (FR1/FR2), OFDM, PSK/QAM, Wi-Fi etc.

To view our full amplifier portfolio visit:
www.ar.ametek-cts.com

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
ISO 9001: 2015 Certified
ISO 17025 :2017 Accredited

The Model 125S1G6C is a self-contained, air-cooled, solid-state Class A broadband power amplifier designed for applications demanding wide bandwidth coverage, high gain, and linear performance. It delivers a minimum of 125 W over a frequency range of 1.0 to 6.0 GHz. The unit includes safeguards against input overdrive beyond 0 dBm, as well as various fault conditions such as excessive temperature and power supply issues.

A scalable, module-based design combined with advanced forced-air cooling ensures reliable operation and long-term performance in demanding test environments. A clear front-panel display provides immediate visibility of operating status and fault conditions, enabling fast setup and confident operation. For maximum flexibility, all control and monitoring functions can be accessed either locally via the front panel or remotely through a wide range of standard interfaces, including GPIB/IEEE-488, RS-232, fiber-optic serial, USB, and Ethernet.

This Class A amplifier is engineered for EMC immunity, communications, and aerospace & defense testing, delivering exceptional stability and linearity under demanding load conditions, including high VSWR, open, or short circuits. Low spurious emissions, high spectral purity, and wideband performance make it ideal for modern wireless and 5G applications.

Export classification for this device is 3A001. These goods, technologies, or software are regulated under U.S. Export Administration Regulations, and unauthorized diversion is prohibited by U.S. law.



- 125 W
- 1.0 – 6.0 GHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output	PSAT	125	150	>175	W
Input for Rated Output	Pin			1.0	mW
				0	dBm
Power Output @ 3 dB Compression	P3dB	120	125	>135	W
Power Output @ 1 dB Compression	P1dB	100	115	>125	W
Operating Frequency	BW	1.0		6.0	GHz
Gain (Small Signal)		55	58	60	dB
Gain Reduction Adjustment (when below gain compression)		10	12	15	dB
Flatness @ small signal (-20 dBm input)	ΔG		± 1.5	± 2.0	dB
Input Impedance	Z in		50		Ohm
			1.5:1	2.0:1	VSWR
Output Impedance	Z out		50		Ohm
3 rd Order Intercept	IP3		+58		dBm
Noise Figure	NF		10		dB
Harmonic Distortion @ 100 W for entire band except 2 – 3 GHz	H2, H3		-30	-20	dBc
Harmonic Distortion @ 100 W for 2 – 3 GHz	H2, H3		-22	-18	
Spurious			-73		dBc
Power Consumption	PD			1150	W

Absolute Maximum Rating				
Exceeding any of the limits listed here may result in permanent damage to the device.				
Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.			100	%
AC Power (single phase)	100		240	VAC
AC Power	47	60	63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	MIL-STD-810G Method 514 and 516			

Mechanical Specifications		
Parameters	Typical	Unit
Dimensions (With Cabinet) (W x H x D)	50.3 x 38.1 x 65.3	cm
	19.8 x 15.0 x 25.7	in
Dimensions (No Cabinet) – 8U for 19” Rack	48.3 x 35.5 x 65.3	cm
	19.0 x 14.0 x 25.7	in
Weight (With Cabinet)	29.5	kg
	65	lb
Weight (No Cabinet)	22.7	kg
	50	lb
Cooling	Forced air (self-contained fans)	
Acoustic Noise Measured @ 1 Meter	60	dBA

Connector Interfaces	
Function	Type
RF Input	N, female, rear (50 Ω) (option front)
RF Output	N, female, rear (50 Ω) (option front)
RF Sample	N, female (50 Ω) (51dB typical)
IEEE-488	24-pin
RS-232	9 pin subminiature D
Ethernet	RJ-45
RS-232 (fiber optic)	ST
USB 2.0	Type B
Interlock	15-pin subminiature D
AC	C14

Regulatory Compliance	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	3A001

Ordering Options


125S1G6C	-	-	N	-	-	N	-	-																		
Model	RF IN Conn Location, Type		RF OUT Conn Location, Type		Enclosure No Enclosure		RF Sample Ports																			
	<table><tr><td colspan="2">Connector</td></tr><tr><td>Front</td><td>F</td></tr><tr><td>Rear</td><td>R</td></tr></table>		Connector		Front	F	Rear	R	<table><tr><td colspan="2">Enclosure</td></tr><tr><td>Enclosure</td><td>E</td></tr><tr><td>No Enclosure</td><td>NE</td></tr></table>		Enclosure		Enclosure	E	No Enclosure	NE	<table><tr><td colspan="2">RF Sample Ports</td></tr><tr><td>Front</td><td>SPF</td></tr><tr><td>Rear</td><td>SPR</td></tr></table>		RF Sample Ports		Front	SPF	Rear	SPR		
Connector																										
Front	F																									
Rear	R																									
Enclosure																										
Enclosure	E																									
No Enclosure	NE																									
RF Sample Ports																										
Front	SPF																									
Rear	SPR																									

Model 125S1G6C

- 125 W
- 1.0 – 6.0 GHz




Envelope Drawing

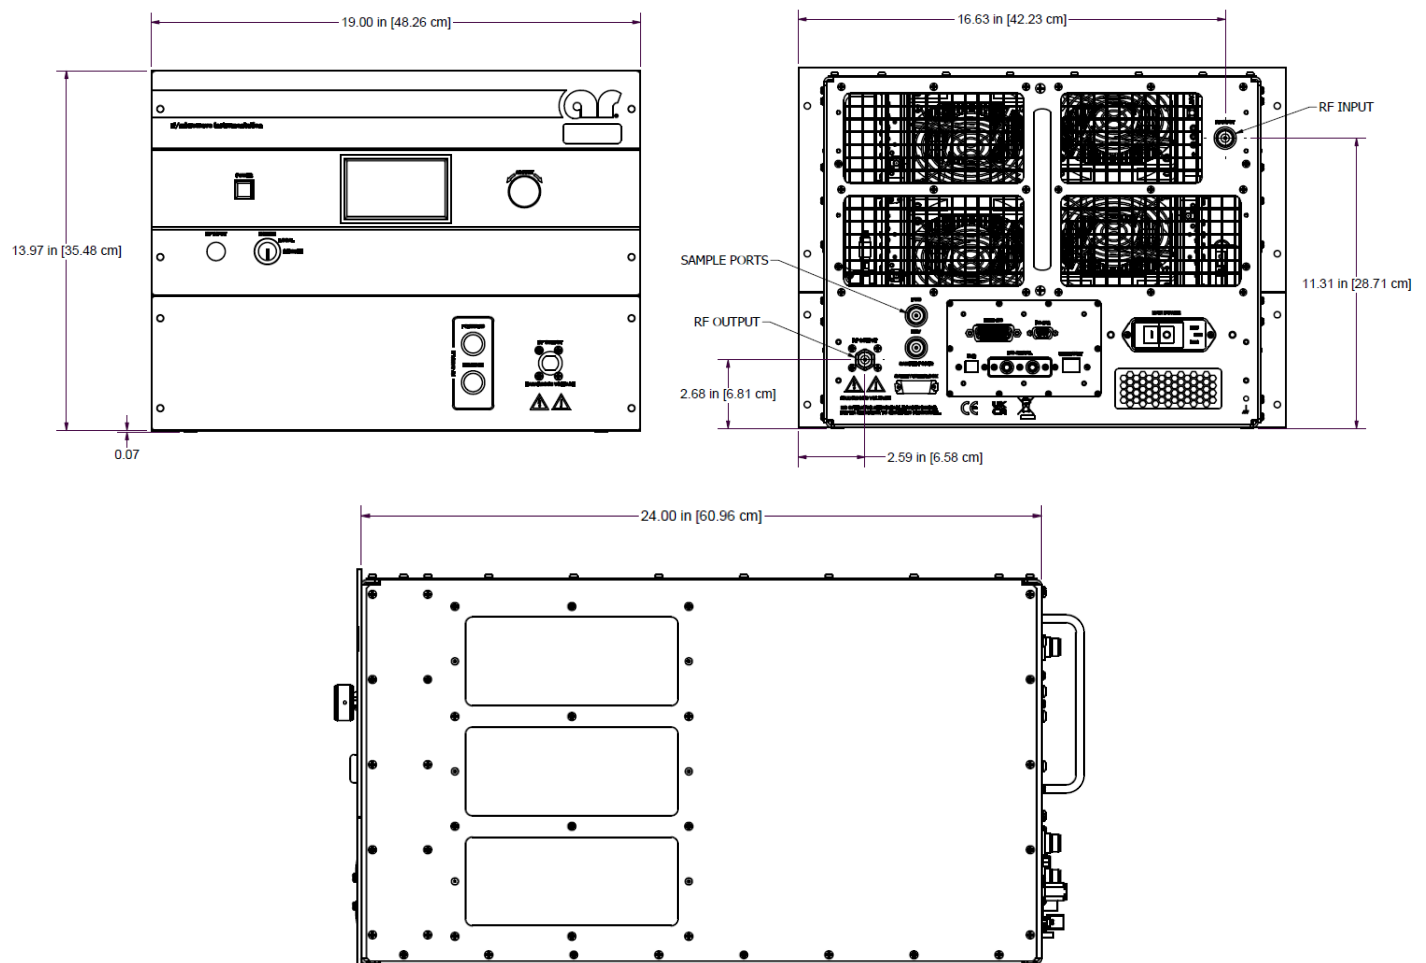


- 125 W
- 1.0 – 6.0 GHz

TYPICAL PSAT POWER @ 0 dBm INPUT

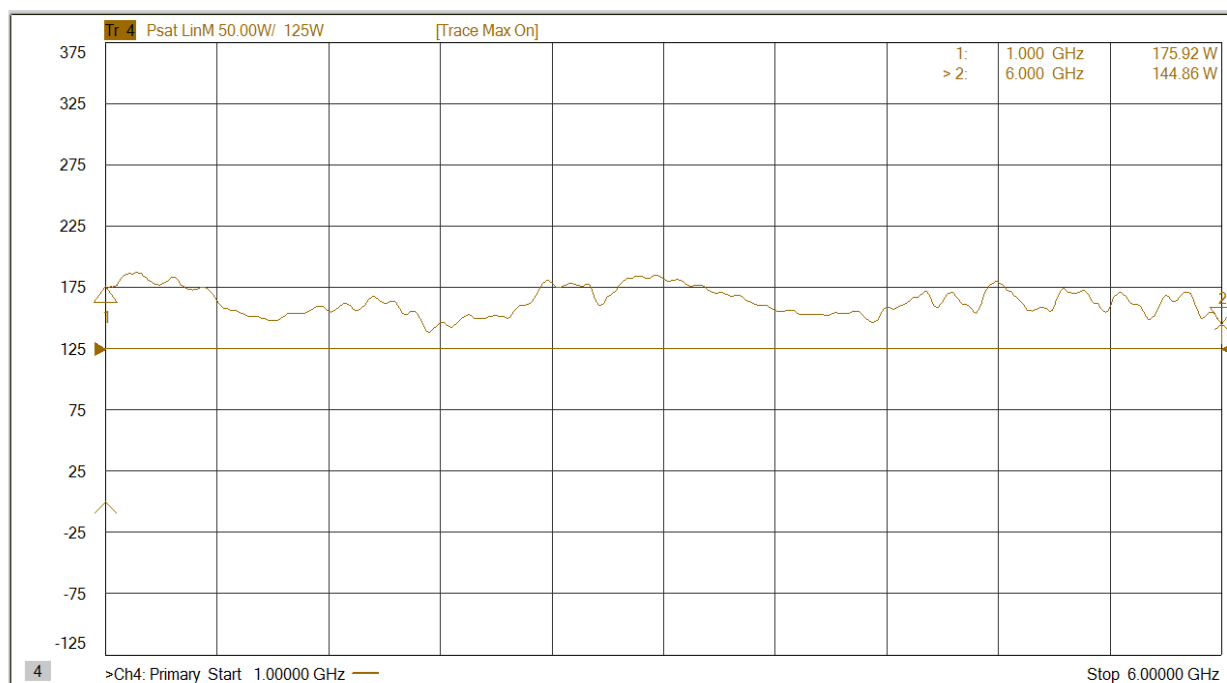

TYPICAL POWER @ P3 dB COMPRESSION

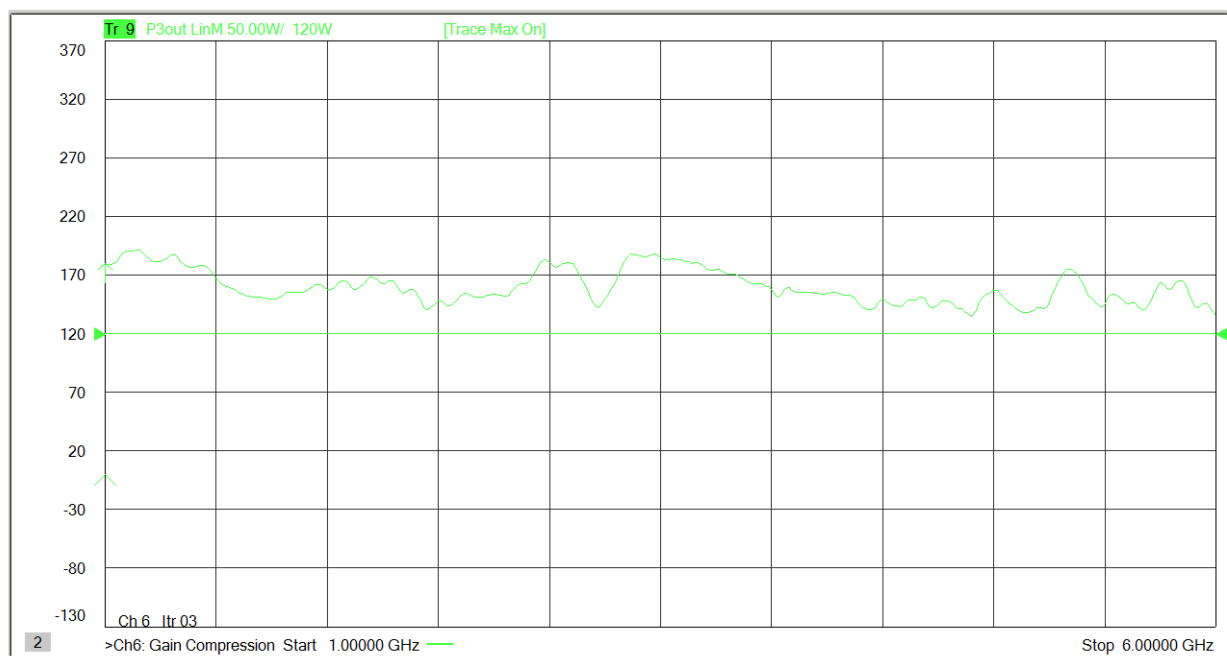


Model 125S1G6C


- 125 W
- 1.0 – 6.0 GHz



TYPICAL POWER @ P1 dB COMPRESSION

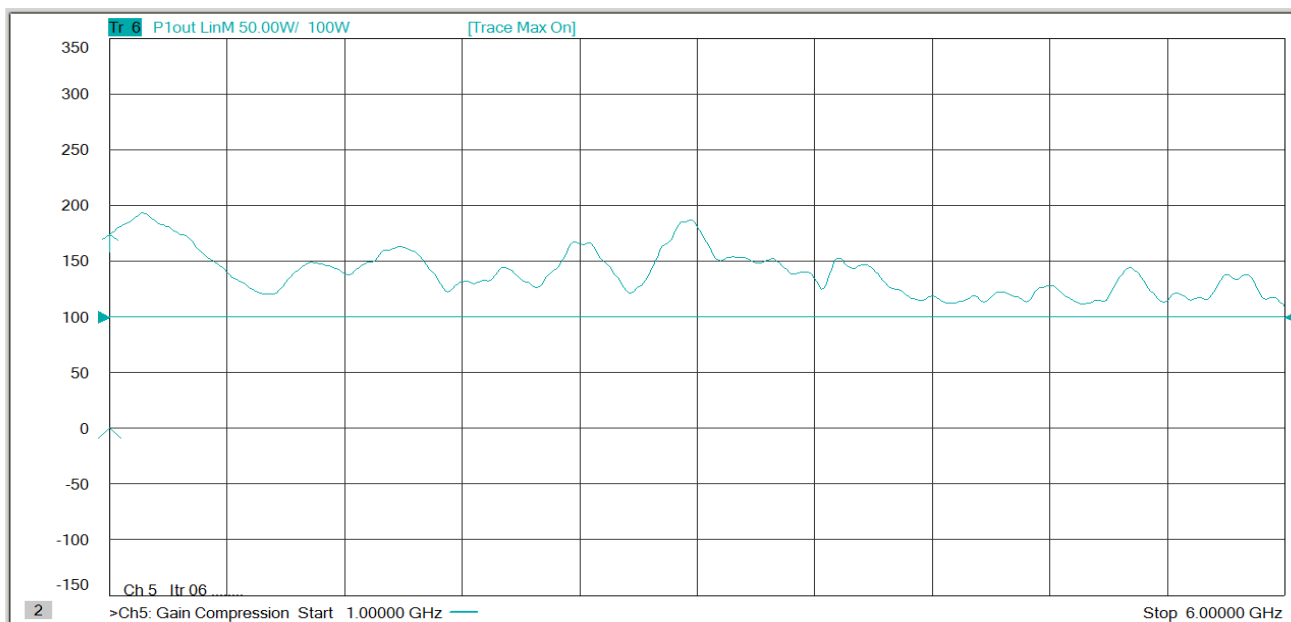


TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

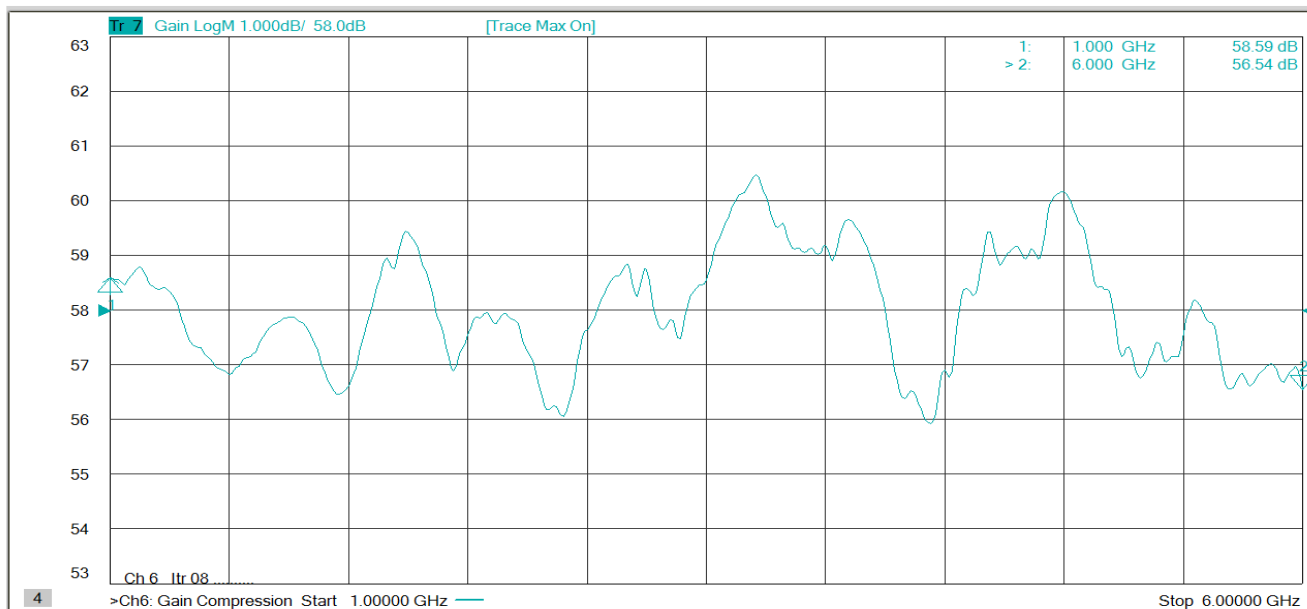


- 125 W
- 1.0 – 6.0 GHz

TYPICAL 2nd HARMONIC @ 100 W OUTPUT

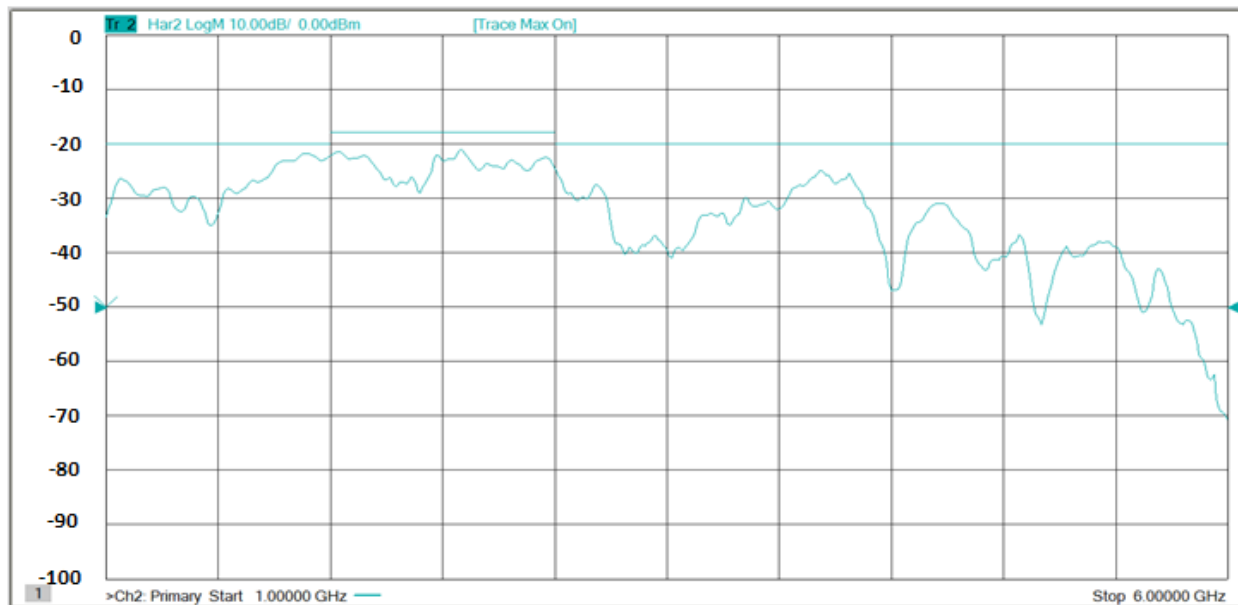

TYPICAL 3rd HARMONIC @ 100 W OUTPUT

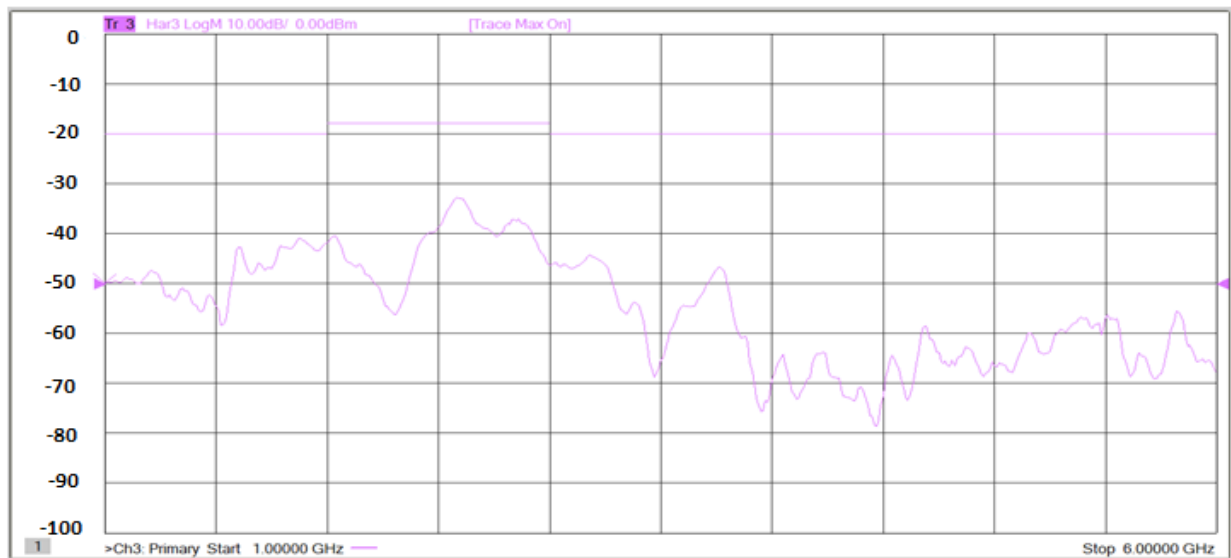

Model 125S1G6C

- 125 W
- 1.0 – 6.0 GHz



TYPICAL INPUT VSWR



TYPICAL NOISE FIGURE

Agilent 11:46:20 Dec 21, 2020

