

Amplifiers

Model 1000W1000J

Features:

- 1000 Watts CW, 80 – 1000 MHz
- Class A Operation
- 100% mismatch tolerant
- Built-in fault monitoring, logging and protection
- Touch screen display
- RF sample ports with forward and reverse power monitoring
- VSWR monitor with user settable limit
- User settable ALC
- Remote control: Ethernet, USB, GPIB, fiber-optic serial, RS-232
- Modular design for easy maintenance and service
- Low acoustical noise
- 3 Year Warranty

Applications:

- EMC (military, aviation, automotive, commercial)
- Radiated and conducted EMC testing
- General purpose, antenna, and component testing
- 4G LTE, 5G NR (FR1/FR2), OFDM, PSK/QAM, Wi-Fi etc.

To view our full amplifier portfolio visit:
www.ar.ametek-cts.com

AR RF/Microwave Instrumentation
160 Schoolhouse Rd
Souderton, PA 18964
215.723.8181
ISO 9001: 2015 Certified
ISO 17025 :2017 Accredited

The Model 1000W1000J is a self-contained, air-cooled, solid-state Class A broadband power amplifier designed for applications demanding wide bandwidth coverage, high gain, and linear performance. It delivers a minimum of 1000 W over a frequency range of 80 to 1000 MHz. The unit includes safeguards against input overdrive beyond 0 dBm, as well as various fault conditions such as excessive temperature and power supply issues.

A scalable, module-based design combined with advanced forced air cooling ensures reliable operation and long-term performance in demanding test environments. A clear front panel display provides immediate visibility of operating status and fault conditions, enabling fast setup and confident operation. For maximum flexibility, all control and monitoring functions can be accessed either locally via the front panel or remotely through a wide range of standard interfaces, including GPIB/IEEE 488, RS 232, fiber optic serial, USB, and Ethernet.

This Class A amplifier is engineered for EMC immunity, communications, and aerospace & defense testing, delivering exceptional stability and linearity under demanding load conditions, including high VSWR, open, or short circuits. Low spurious emissions, high spectral purity, and wideband performance make it ideal for modern wireless and 5G applications.

Export classification for this device is EAR99. These goods, technologies, or software are regulated under U.S. Export Administration Regulations, and unauthorized diversion is prohibited by U.S. law.



- 1000 W
- 80 MHz - 1000 MHz

Electrical Specifications					
Parameter	Symbol	Minimum	Typical	Maximum	Unit
Rated Power Output	PSAT	1000	1100	>1200	W
Input for Rated Output	Pin			1	mW
				0	dBm
Power Output @ 3dB Compression (80 – 750 MHz)	P3dB	1000	1100	>1200	W
Power Output @ 3dB Compression (750 – 1000 MHz)	P3dB	950	1000	>1100	W
Power Output @ 1dB Compression (80 – 750 MHz)	P1dB	950	1000	>1100	W
Power Output @ 1dB Compression (750 – 1000 MHz)	P1dB	800	900	>950	W
Operating Frequency	BW	80		1000	MHz
Gain (Small Signal)			60		dB
Gain Reduction Adjustment (when below gain compression)		20			dB
Flatness @ small signal (-20 dBm input)	ΔG		±1.0	±1.5	dB
Input Impedance	Z in		50		Ohm
			1.3:1	1.5:1	VSWR
Output Impedance	Z out		50		Ohm
			2.0:1	2.5:1	VSWR
3 rd Order Intercept	IP3		+66		dBm
Noise Figure	NF		8		dB
Harmonic Distortion @ 1000 W	H2, H3		-30	-20	dBc
Spurious			-70		dBc
Power Consumption	Pd			3300	W

Absolute Maximum Rating				
Exceeding any of the limits listed here may result in permanent damage to the device.				
Parameter	Minimum	Typical	Maximum	Unit
RF Drive		0	+13	dBm
RF Load		1:1	∞	VSWR
RF Load Reflected			100	%
Will operate without damage or oscillation when connected to any load impedance without the aid of foldback circuitry.				
AC Power (single phase)	200		240	VAC
AC Power	47	60	63	Hz
Ambient Temperature	+5	+25	+40	°C
Storage Temperature	-20		+50	°C
Altitude			2000	m
Shock/Vibration	Normal Truck Transport			

Model 1000W1000J

- 1000 W
- 80 MHz - 1000 MHz



Mechanical Specifications		
Parameters	Typical	Unit
Dimensions (With Cabinet) (W x H x D)	56.1 x 97.8 x 82.5	cm
	22.1 x 38.5 x 32.5	in
Weight (With Cabinet)	124.8	kg
	275	lb
Cooling	Forced air (self-contained fans)	
Acoustic Noise Measured @ 1 Meter	62	dBA

Connector Interfaces	
Function	Type
RF Input	N, female, rear (50 Ω) (option front)
RF Output	7/16 DIN, female, rear (50 Ω)
RF Sample	N, female (50 Ω) (coupling factor 63 dB typical)
IEEE-488	24-pin
RS-232	9 pin subminiature D
Ethernet	RJ-45
RS-232 (fiber optic)	ST
USB 2.0	Type B
Interlock	15-pin subminiature D

Regulatory Compliance	
Type	Standard
EMC	EN 61326-1
Safety	UL 61010-1
	CAN/CSA C22.2 #61010-1
	CENELEC EN 61010-1
RoHS	Directive 2011/65/EU
Export	EAR99

Ordering Options

1000W1000J	-	N	-	R	-	716	-												
Model		RF IN Conn Location, Type		RF OUT Conn Location, Type		RF Sample Ports													
		<table><tr><th colspan="2">Connector</th></tr><tr><td>Front</td><td>F</td></tr><tr><td>Rear</td><td>R</td></tr></table>	Connector		Front	F	Rear	R			<table><tr><th colspan="2">RF Sample Ports</th></tr><tr><td>Front</td><td>SPF</td></tr><tr><td>Rear</td><td>SPR</td></tr></table>	RF Sample Ports		Front	SPF	Rear	SPR		
Connector																			
Front	F																		
Rear	R																		
RF Sample Ports																			
Front	SPF																		
Rear	SPR																		




Model 1000W1000J

- 1000 W
- 80 MHz - 1000 MHz



Envelope Drawing

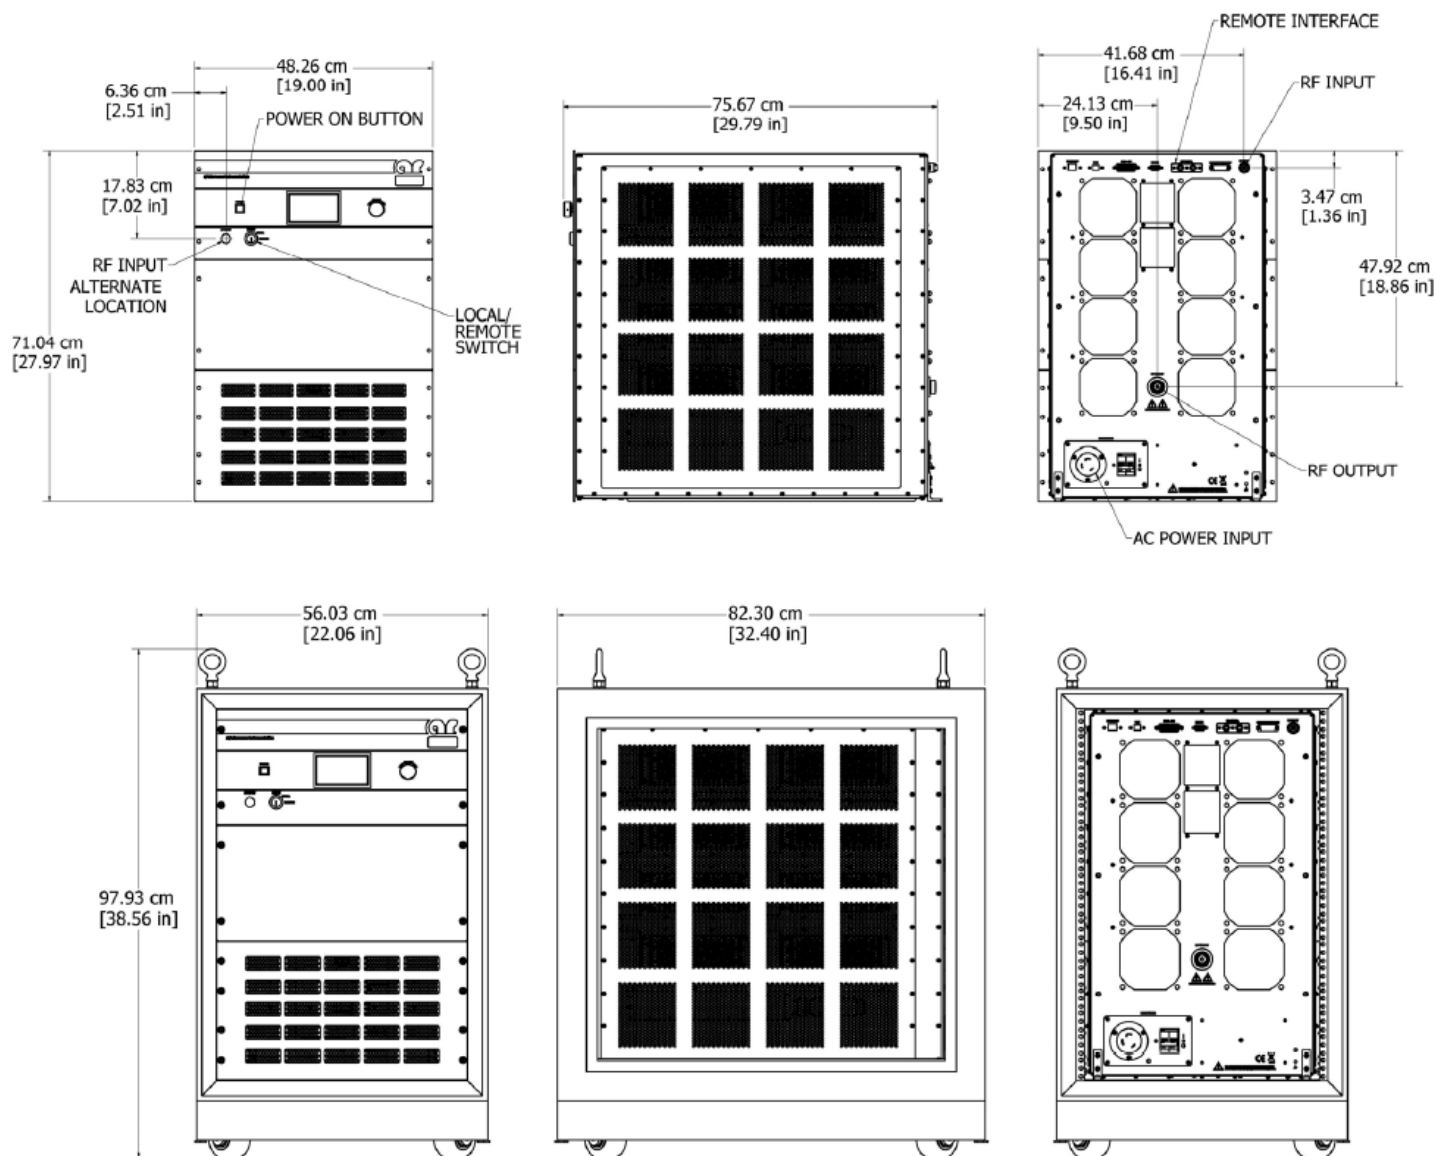


Model 1000W1000J

- 1000 W
- 80 MHz - 1000 MHz



TYPICAL OUTPUT POWER

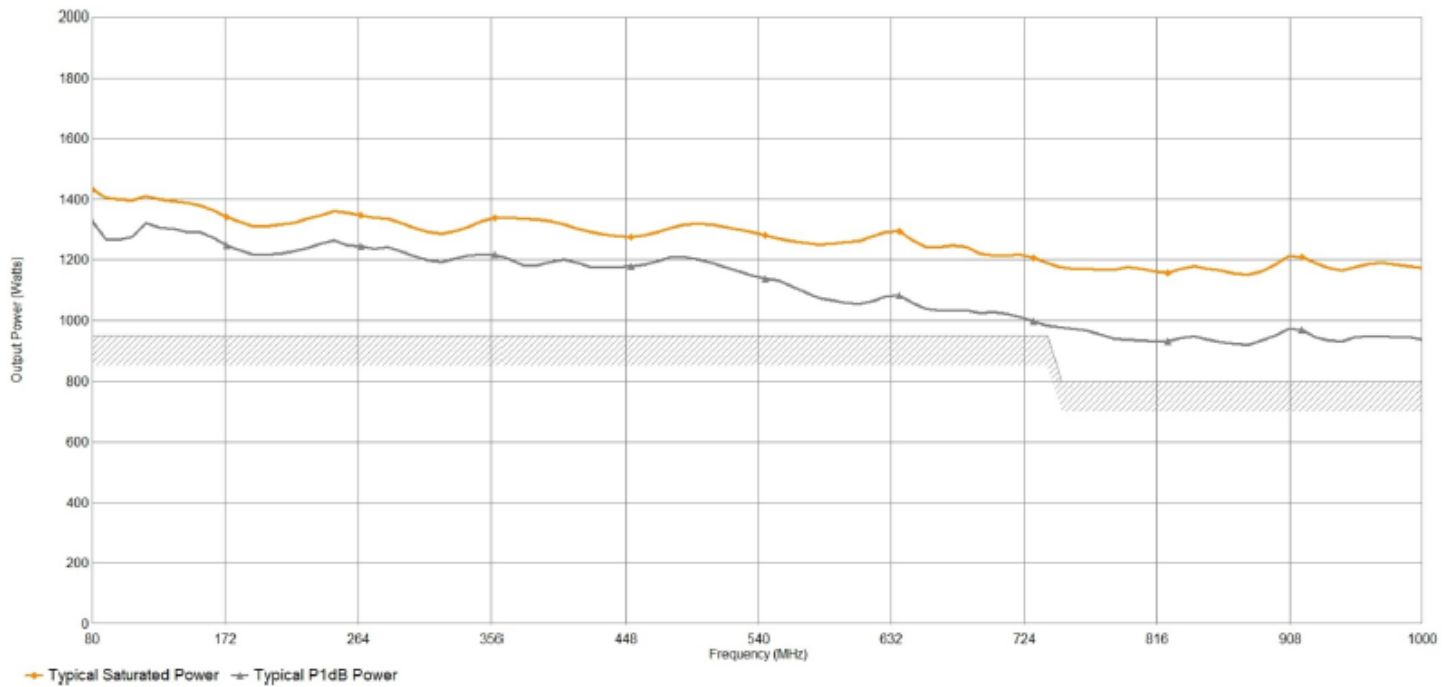

TYPICAL SMALL SIGNAL GAIN @ -20 dBm INPUT

Model 1000W1000J

- 1000 W
- 80 MHz - 1000 MHz



TYPICAL HARMONICS @ 425 WATTS

TYPICAL INPUT VSWR

Model 1000W1000J

- 1000 W
- 80 MHz - 1000 MHz



TYPICAL NOISE FIGURE